

IPP 3D Printing Extensions 0.1 (3D)

Status: Initial

Abstract: This white paper defines an extension to the Internet Printing Protocol that supports printing of physical objects by Additive Manufacturing devices such as 3D printers.

This document is a White Paper. For a definition of a "White Paper", see:

<http://ftp.pwg.org/pub/pwg/general/pwg-process30.pdf>

This document is provided for informational purposes as a contribution to the IEEE-ISTO Printer Working Group and is subject to the IEEE-ISTO PWG Intellectual Property Policy located at:

http://www.pwg.org/chair/membership_docs/pwg-ip-policy.pdf

This document is available electronically at:

<http://ftp.pwg.org/pub/pwg/ipp/ws/wd-sweet-ipp3d-20150405.docx>
<http://ftp.pwg.org/pub/pwg/ipp/ws/wd-sweet-ipp3d-20150405.pdf>

Table of Contents

1	1. Introduction	5
2	2. Terminology	5
3	2.1 Terms Used in This Document.....	5
4	2.2 Acronyms and Organizations	6
5	3. Rationale for IPP 3D Printing Extensions	7
6	3.1 Use Cases.....	7
7	3.1.1 Print a 3D Object	7
8	3.1.2 Print a 3D Object Using Loaded Materials.....	7
9	3.1.3 Print a 3D Object with Multiple Materials	7
10	3.1.4 View a 3D Object During Printing	8
11	3.2 Exceptions.....	8
12	3.2.1 Clogged Extruder.....	8
13	3.2.2 Extruder Temperature Out of Range	8
14	3.2.3 Extruder Head Movement Issues	8
15	3.2.4 Filament Feed Jam	8
16	3.2.5 Filament Feed Skip.....	8
17	3.2.6 Material Empty	8
18	3.2.7 Material Adhesion Issues.....	9
19	3.2.8 Print Bed Temperature Out of Range	9
20	3.2.9 Print Bed Not Clear	9
21	3.3 Out of Scope	9
22	3.4 Design Requirements.....	9
23	4. Technical Solutions/Approaches.....	10
24	4.1 High-Level Model	10
25	4.1.1 Build Platforms.....	11
26	4.1.2 Cameras	11
27	4.1.3 Cutters	11
28	4.1.4 Fans.....	11
29	4.1.5 Lamps	11
30	4.1.6 Lasers	11
31	4.1.7 Markers (or Extruders).....	11
32	4.1.8 Motors.....	11
33	4.1.9 Reservoirs.....	11
34	4.2 Coordinate System.....	12
35	5. New Attributes.....	12
36	5.1 Job Template Attributes	12
37	5.1.1 materials-col (1setOf collection)	12
38	5.1.2 print-fill-density (integer(0:100)).....	14
39	5.1.3 print-fill-thickness (integer(0:MAX))	14
40	5.1.4 print-layer-thickness (integer(0:MAX))	14
41	5.1.5 print-rafts (type2 keyword)	14
42	5.1.6 print-shell-thickness (integer(0:MAX))	15
43	5.1.7 print-supports (type2 keyword)	15
44	5.1.8 printer-bed-temperature (integer no-value).....	15
45	5.1.9 printer-chamber-temperature (integer no-value).....	15

47	5.1.10 printer-fan-speed (integer(0:100)).....	15
48	5.2 Printer Description Attributes.....	15
49	5.2.1 materials-col-database (1setOf collection)	15
50	5.2.2 materials-col-default (1setOf collection)	16
51	5.2.3 materials-col-ready (1setOf collection)	16
52	5.2.4 materials-col-supported (1setOf type2 keyword).....	16
53	5.2.5 material-diameter-supported (1setOf (integer rangeOfInteger)).....	16
54	5.2.6 material-feed-rate-supported (1setOf (integer rangeOfInteger)).....	16
55	5.2.7 material-type-supported (1setOf type2 keyword).....	16
56	5.2.8 print-fill-density-default (integer(0:100)).....	16
57	5.2.9 print-fill-thickness-default (integer(0:MAX))	16
58	5.2.10 print-fill-thickness-supported (1setOf (integer(0:MAX) 59 rangeOfInteger(0:MAX)))	16
60	5.2.11 print-layer-order (type1 keyword).....	17
61	5.2.12 print-layer-thickness-default (integer(0:MAX))	17
62	5.2.13 print-layer-thickness-supported (1setOf (integer(0:MAX) 63 rangeOfInteger(0:MAX)))	17
64	5.2.14 print-rafts-default (type2 keyword).....	17
65	5.2.15 print-rafts-supported (1setOf type2 keyword)	17
66	5.2.16 print-shell-thickness-default (integer(0:MAX))	17
67	5.2.17 print-shell-thickness-supported (1setOf (integer(0:MAX) 68 rangeOfInteger(0:MAX)))	17
69	5.2.18 print-supports-default (type2 keyword)	17
70	5.2.19 print-supports-supported (1setOf type2 keyword)	17
71	5.2.20 printer-bed-temperature-default (integer no-value).....	17
72	5.2.21 printer-bed-temperature-supported (1setOf (integer rangeOfInteger))	18
73	5.2.22 printer-chamber-temperature-default (integer no-value).....	18
74	5.2.23 printer-chamber-temperature-supported (1setOf (integer rangeOfInteger))	18
75	5.2.24 printer-fan-speed-default (integer(0:MAX))	18
76	5.2.25 printer-fan-speed-supported (boolean)	18
77	5.2.26 printer-head-temperature-supported (1setOf integer rangeOfInteger)	18
78	5.2.27 filament-retraction-distance-supported (1setOf (integer(0:MAX) 79 rangeOfInteger(0:MAX)))	18
80	5.2.28 filament-speed-supported (1setof (integer(0:MAX) rangeOfInteger(0:MAX)))	18
81	5.2.29 print-speed-supported (1setOf integer(1:MAX) rangeOfInteger(1:MAX))	18
82	5.2.30 printer-accuracy-supported (collection)	19
83	5.2.31 printer-volume-supported (collection)	19
84	5.3 Printer Status Attributes	19
85	5.3.1 printer-bed-temperature-current (integer no-value)	19
86	5.3.2 printer-chamber-temperature-current (integer no-value)	19
87	5.3.3 printer-fan-speed-current (integer(0:100))	19
88	5.3.4 printer-head-temperature-current (1setOf (integer no-value))	19
89	5.4 Other Potential Attributes	19
90	6. New Values for Existing Attributes.....	20
91	6.1 ipp-features-supported (1setOf type2 keyword)	20
92	6.2 printer-state-reasons (1setOf type2 keyword)	20

93	7. Object Definition Languages (ODLs)	21
94	7.1 Additive Manufacturing Format (AMF)	21
95	7.2 Standard Tessellation Language (STL).....	21
96	7.3 G-Code.....	21
97	7.4 S3G/X3G File Format.....	21
98	8. Internationalization Considerations.....	22
99	9. Security Considerations	23
100	10. References.....	23
101	11. Author's Address.....	25
102	12. Change History	26
103	12.1 April 5, 2015	26
104	12.2 January 23, 2015.....	26

List of Figures

108 Figure 1 - Typical Build Platform Coordinate System 12

List of Tables

112 Table 1 - 3D Printer Subunits..... 10

115 1. Introduction

116 This white paper defines an extension to the Internet Printing Protocol (IPP) that supports
117 printing of physical objects by Additive Manufacturing devices such as three-dimensional
118 (3D) printers. The attributes and values defined in this document have been prototyped
119 using the CUPS software [CUPS].

120 The primary focus of this document is on popular Fused Deposition Modeling (FDM)
121 devices that melt and extrude ABS and PLA filaments in layers to produce a physical, 3D
122 object. However, the same attributes can be used for other types of 3D printers that use
123 different methods and materials such as Laser Sintering of powdered materials and curing
124 of liquids using ultraviolet light.

125 This document also does not address the larger issue of choosing a common Object
126 Definition Language (ODL) for interoperability, however there are suggested MIME media
127 type names listed in section 7 for several formats in common use.

128 2. Terminology

129 2.1 Terms Used in This Document

130 *Additive Manufacturing*: A 3D printing process where material is progressively added to
131 produce the final output.

132 *Binder Jetting*: A 3D printing process that uses a liquid binder that is jetted to fuse layers of
133 powdered materials.

134 *Digital Light Processing*: A 3D printing process that uses light with a negative image to
135 selectively cure layers of a liquid material.

136 *Fused Deposition Modeling*: A 3D printing process that extrudes a molten material to draw
137 layers.

138 *Laser Sintering*: A 3D printing process that uses a laser to melt and fuse layers of
139 powdered materials.

140 *Material Jetting*: A 3D printing process that jets the actual build materials in liquid or molten
141 state to produce layers.

142 *Selective Deposition Lamination*: A 3D printing process that laminates cut sheets of
143 material.

144 *Stereo Lithography*: A 3D printing process that uses a laser to cure and fuse layers of
145 liquid materials.

146 *Subtractive Manufacturing*: A 3D printing process where material is progressively removed
147 to produce the final output.

148 **2.2 Acronyms and Organizations**

149 *CNC*: Computer Numerical Control

150 *DLP*: Digital Light Processing

151 *FDM*: Fused Deposition Modeling

152 *IANA*: Internet Assigned Numbers Authority, <http://www.iana.org/>

153 *IETF*: Internet Engineering Task Force, <http://www.ietf.org/>

154 *ISO*: International Organization for Standardization, <http://www.iso.org/>

155 *PWG*: Printer Working Group, <http://www.pwg.org/>

156 *SD*: SD Card Association, <http://www.sdcard.org/>

157 *SDL*: Selective Deposition Lamination

158 *SL*: Stereo Lithography

159 *USB*: Universal Serial Bus, <http://www.usb.org/>

160

161 **3. Rationale for IPP 3D Printing Extensions**

162 Existing specifications define the following:

- 163 1. IPP/2.0 Second Edition [PWG5100.12] defines version 2.0, 2.1, and 2.2 of the
164 Internet Printing Protocol which defines a standard operating and data model,
165 interface protocol, and extension mechanism to support traditional Printers;
- 166 2. IPP Everywhere [PWG5100.14] defines a profile of existing IPP specifications,
167 standard Job Template attributes, and standard document formats;
- 168 3. The Standard Specification for Additive Manufacturing File Format (AMF)
169 Version 1.1 [ISO52915] defines an XML schema and file format for describing
170 3D objects with one or more materials;
- 171 4. The SLC File Specification [STLFORMAT] defines a file format (commonly
172 called "STL files") for describing 3D object with a single material;
- 173 5. The Interchangeable Variable Block Data Format for Positioning, Contouring,
174 and Contouring/Positioning Numerically Controlled Machines [RS274D] defines
175 the "G-code" format that is commonly used by 3D printers; and
- 176 6. The S3G protocol [S3G] defines a simple network protocol and file format for
177 controlling 3D printers.

178 Therefore, this IPP 3D Printing Extensions (3D) document should define IPP attributes,
179 values, and operations needed to support printing of 3D objects, status monitoring of 3D
180 printers and print jobs, and configuration of 3D printer characteristics and capabilities.

181 **3.1 Use Cases**

182 **3.1.1 Print a 3D Object**

183 Jane is viewing a 3D object and wishes to print it. After initiating a print action, she selects
184 a 3D printer on the network, specifies material and print settings, and submits the object
185 for printing.

186 **3.1.2 Print a 3D Object Using Loaded Materials**

187 Jane is viewing a 3D object and wishes to print it. After initiating a print action, she selects
188 a 3D printer on the network that has the material(s) she wishes to use, specifies additional
189 print settings, and submits the object for printing.

190 **3.1.3 Print a 3D Object with Multiple Materials**

191 Jane wants to print a multi-material object on a single-material Printer. Jane uses software
192 on her Client device to create Document data that instructs the Printer to pause printing
193 and provide status information at specific layers so that she can change materials at the
194 Printer and resume printing with the new material.

195 **3.1.4 View a 3D Object During Printing**

196 Jane has submitted a 3D print Job that will take 4 hours to complete. She can visually
197 monitor the progress of the Job through a web page provided by the Printer.

198 **3.2 Exceptions**

199 **3.2.1 Clogged Extruder**

200 While printing a 3D object, the extruder becomes clogged. The printer stops printing and
201 sets the corresponding state reason to allow Jane's Client device to discover the issue and
202 display an appropriate alert.

203 **3.2.2 Extruder Temperature Out of Range**

204 While printing a 3D object, the extruder temperature goes out of range for the material
205 being printed. The printer pauses printing until the temperature stabilizes and sets the
206 corresponding state reason to allow Jane's Client device to discover the issue and display
207 an appropriate alert.

208 **3.2.3 Extruder Head Movement Issues**

209 While printing a 3D object, the extruder head movement becomes irregular. The Printer
210 stops printing and sets the corresponding state reason to allow Jane's Client device to
211 discover the issue and display an appropriate alert.

212 **3.2.4 Filament Feed Jam**

213 While printing a 3D object, the filament jams and cannot be fed into the extruder. The printer
214 stops printing and sets the corresponding state reason to allow Jane's Client device
215 to discover the issue and display an appropriate alert.

216 **3.2.5 Filament Feed Skip**

217 While printing a 3D object, the filament extrusion rate is insufficient to maintain proper
218 printing. The printer stops printing and sets the corresponding state reason to allow Jane's
219 Client device to discover the issue and display an appropriate alert.

220 **3.2.6 Material Empty**

221 While printing a 3D object, the printer runs out of the printing material. The printer pauses
222 printing until more material is loaded and sets the corresponding state reason to allow
223 Jane's Client device to discover the issue and display an appropriate alert.

224 **3.2.7 Material Adhesion Issues**

225 While printing a 3D object, the printed object releases from the build platform or the current
226 layer is not adhering to the previous one. The printer stops printing and sets the
227 corresponding state reason to allow Jane's Client device to discover the issue and display
228 an appropriate alert.

229 **3.2.8 Print Bed Temperature Out of Range**

230 While printing a 3D object, the print bed temperature goes out of the requested range. The
231 printer pauses printing until the temperature stabilizes and sets the corresponding state
232 reason to allow Jane's Client device to discover the issue and display an appropriate alert.

233 **3.2.9 Print Bed Not Clear**

234 When starting to print a 3D object, the Printer detects that the build platform is not
235 empty/clear. The Printer stops printing and sets the corresponding state reason to allow
236 Jane's Client device to discover the issue and display an appropriate alert. The Printer
237 starts printing once the build platform is cleared.

238 **3.3 Out of Scope**

239 The following are considered out of scope for this document:

- 240 1. Definition of new file formats; and
241 2. Support for Subtractive Manufacturing technologies such as CNC milling
242 machines.

243 **3.4 Design Requirements**

244 The design requirements for this document are:

- 245 1. Define attributes and values to describe supported and loaded (ready) materials
246 used for FDM; and
247 2. Define attributes and values to describe FDM printer capabilities and state

248 The design recommendations for this document are:

- 249 1. Support 3D printing technologies other than FDM
250

251 **4. Technical Solutions/Approaches**

252 Current 3D printers offer limited connectivity and status monitoring capabilities. Many
253 printers simply print G-code files from SD memory cards, with all interaction and status
254 monitoring happening at the printer's console.

255 Makerbot Industries uses a proprietary protocol [S3G] and file format that generalizes
256 some aspects of the interface between a host device and 3D printer. However, this
257 solution is highly specific to FDM printing and does not offer any spooling or security
258 functionality.

259 Various other proprietary protocols and interfaces are also in use, typically based on the
260 USB serial protocol class for direct connection to a host device. And there are a number of
261 Cloud-based solutions emerging that utilize a proxy device that communicates with the
262 Cloud and 3D printer.

263 Given that the 3D printing industry and technologies are still undergoing a great deal of
264 change and development, certain aspects of 3D printing may be difficult or infeasible to
265 standardize. However, a stable, reliable, and secure interface between host device (IPP
266 Client) and 3D printer (IPP Printer) can be defined today in a way that allows for future
267 changes to be incorporated without difficulty.

268 **4.1 High-Level Model**

269 IPP [RFC2911] and the IETF Printer MIB [RFC3805] already define a comprehensive
270 model for the operation and data elements of a typical 2D printer. The IPP Job processing
271 model matches how 3D printers process Jobs and Documents. However, more types of
272 subunits are used in a 3D printer, requiring additions to the model and state values. Table
273 1 lists the subunits of 3D printers for different technologies.

274

Table 1 - 3D Printer Subunits

Subunit	Technology
Build Platforms	All
Cameras	All
Cutters	SDL
Doors	All
Fans	FDM
Input Trays	SDL
Lamps	DLP
Lasers	Laser Sintering, SL
Marker Supplies	All
Markers (or Extruders)	Many
Media Path	SDL
Motors	All
Reservoirs	DLP, Laser Sintering, SL

275 **4.1.1 Build Platforms**

276 Build Platforms hold the printed object. The platform typically moves up or down during
277 printing as layers are applied, although in some cases it moves along all three axis.

278 **4.1.2 Cameras**

279 Cameras typically show the Build Platforms, offering a visual progress/status reporting for
280 remote users.

281 **4.1.3 Cutters**

282 Cutters are used to trim support material on printed objects and/or remove regions of
283 media that are not part of the final printed object.

284 **4.1.4 Fans**

285 Fans are used to cool printed material and maintain proper extruder and material
286 temperatures.

287 **4.1.5 Lamps**

288 Lamps are used by DLP printers to provide an ultraviolet light source for curing the liquid
289 material while printing a layer. Lamps are also used to illuminate the Build Platforms.

290 **4.1.6 Lasers**

291 Lasers are used by Laser Sintering and Stereo Lithography (SL) printers to fuse powdered
292 material or cure liquid material while printing a layer.

293 **4.1.7 Markers (or Extruders)**

294 Markers can be traditional subunits where an image is printed on sheets of paper (SDL),
295 extruders that place material onto the Build Platform or previous layer, or projectors that
296 display an inverse image on the surface of a liquid material (DLP).

297 **4.1.8 Motors**


298 Motors are used to move the Build Platforms and (in some cases) move the Markers.

299 **4.1.9 Reservoirs**

300 Reservoirs hold liquid or powdered material used to create the printed object.

301 **4.2 Coordinate System**

302 3D printers operate in three dimensions and thus have three axis of movement. Figure 1
303 shows the coordinate system where the X axis represents the width of the object, the Y
304 axis represents the depth of the object, and the Z axis represents the height of the object.

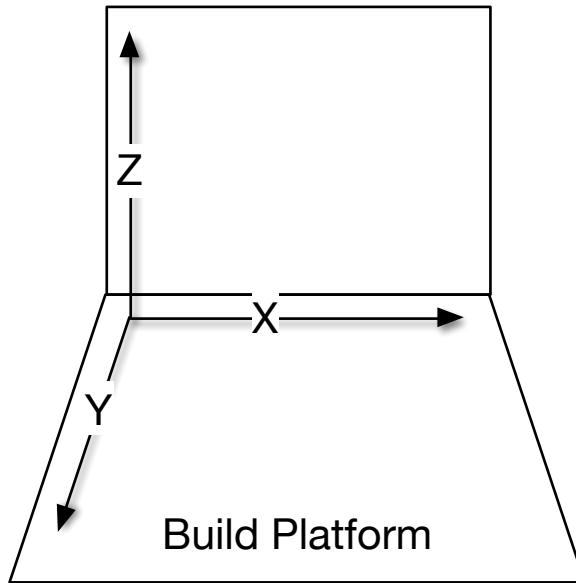

306 **Figure 1 - Typical Build Platform Coordinate System**

307 Filament usage by extrusion Printers is sometimes also modeled as an additional "E" axis,
308 e.g., E1 for the first filament, E2 for the second filament, etc.

309 **5. New Attributes**

310 **5.1 Job Template Attributes**

311 **5.1.1 materials-col (1setOf collection)**

312 This Job Template attribute defines the materials to be used for the Job. When specified,
313 the Printer validates the requested materials both when the Job is created and when it
314 enters the 'processing' state. If the requested materials are not loaded, the 'material-
315 needed' keyword is added to the Printer's "printer-state-reasons" values and the Job is
316 placed in the 'processing-stopped' state.

317 The Client typically supplies "materials-col" values matching those returned in the
318 "material-cols-database" (section 5.2.1) or "materials-col-ready" (section 5.2.3) Printer
319 Description attributes.

320 **5.1.1.1 material-color (type2 keyword)**

321 This member attribute provides a PWG media color value representing the color of the
322 material.

323 **5.1.1.2 material-diameter (integer)**

324 This member attribute provides the diameter of the printed material in nanometers. This
325 attribute is only applicable for Printers that extrude their material.

326 **5.1.1.3 material-feed-rate (integer)**

327 This member attribute provides the material feed rate in nanometers per second. This
328 attribute is only applicable for Printers that extrude their material.

329 [Editor's note: Some feedback indicates that we might want to specify feed rate using
330 volume...]

331 **5.1.1.4 material-key (keyword)**

332 This member attribute provides an unlocalized name of the material that can be localized
333 using the strings file referenced by the "printer-strings-uri" Printer attribute.

334 **5.1.1.5 material-name (name(MAX))**

335 This member attribute provides a localized name of the material.

336 **5.1.1.6 material-type (type2 keyword)**

337 This member attribute specifies the type of material. Values include:

338 'abs_filament': Acrylonitrile Butadiene Styrene (ABS) filament.

339 'chocolate_powder': Chocolate powder.

340 'gold_powder': Gold (metal) powder.

341 'photopolymer-resin_liquid': Photopolymer (liquid) resin.

342 'pla_filament': Polylactic Acid (PLA) filament.

343 'pla-conductive_filament': Conductive PLA filament.

344 'pla-flexible_filament': Flexible PLA filament.

345 'silver_powder': Silver (metal) powder.

346 [Editor's note: This list needs to be expanded significantly...]

347 **5.1.1.7 filament-retraction-distance (integer(0:MAX))**

348 This member attribute specifies the filament retraction distance in nanometers. This
349 attribute is only applicable to FDM Printers.

350 **5.1.1.8 filament-retraction-speed (integer(0:MAX))**

351 This member attribute specifies the filament retraction speed in nanometers per second.
352 This attribute is only applicable to FDM Printers.

353 **5.1.1.9 extruder-temperature (integer | rangeOfInteger)**

354 This member attribute specifies the desired extruder temperature (or range of
355 temperatures) in degrees Celsius. This attribute is only applicable to Printers that extrude
356 their material.

357 **5.1.1.10 print-speed (integer(1:MAX))**

358 This member attribute specifies the print speed in nanometers per second.

359 **5.1.2 print-fill-density (integer(0:100))**

360 This Job Template attribute specifies the fill density of interior regions in percent.

361 **5.1.3 print-fill-thickness (integer(0:MAX))**

362 This Job Template attribute specifies the thickness of any fill walls in nanometers, with 0
363 representing the thinnest possible walls.

364 [Editor's note: One comment requested speed/layer thickness attributes for infill regions.
365 Right now print speed is a materials-col value - do we add a print-fill-material attribute to
366 specify the fill material (which then gives us the speed), or do we move print-speed to a
367 top-level attribute and then have print-fill-speed and print-shell-speed?]

368 **5.1.4 print-layer-thickness (integer(0:MAX))**

369 This Job Template attribute specifies the thickness of each layer in nanometers, with 0
370 representing the thinnest possible layers.

371 **5.1.5 print-rafts (type2 keyword)**

372 This Job Template attribute specifies whether to print brims, rafts, or skirts under the
373 object. Values include:

374 'none': Do not print brims, rafts, or skirts.

375 'brim-N': Print brims using the Nth material, where N is an integer from 1 to the
376 number of materials specified for the Job.

377 raft-N': Print rafts using the Nth material, where N is an integer from 1 to the number
378 of materials specified for the Job.

379 skirt-N': Print skirts using the Nth material, where N is an integer from 1 to the
380 number of materials specified for the Job.

381 'standard': Print brims, rafts, and/or skirts using implementation-defined default
382 parameters.

383 **5.1.6 print-shell-thickness (integer(0:MAX))**

384 This Job Template attribute specifies the thickness of exterior walls in nanometers, with 0
385 representing the thinnest possible wall.

386 **5.1.7 print-supports (type2 keyword)**

387 This Job Template attribute specifies whether to print supports under the object. Values
388 include:

389 'none': Do not print supports.

390 'standard': Print supports using implementation-defined default parameters.

391 'material-N': Print supports using the Nth material, where N is an integer from 1 to
392 the number of materials for the Job.

393 **5.1.8 printer-bed-temperature (integer | no-value)**

394 This Job Template attribute specifies the desired Build Platform temperature in degrees
395 Celsius. The 'no-value' value is used to disable temperature control on the Build Platform.

396 **5.1.9 printer-chamber-temperature (integer | no-value)**

397 This Job Template attribute specifies the desired print chamber temperature in degrees
398 Celsius. The 'no-value' value is used to disable temperature control in the print chamber.

399 **5.1.10 printer-fan-speed (integer(0:100))**

400 This Job Template attribute specifies the desired fan speed in percent of maximum. A
401 value of 0 turns the fans off during printing.

402 **5.2 Printer Description Attributes**

403 **5.2.1 materials-col-database (1setOf collection)**

404 This Printer Description attribute lists the pre-configured materials for the Printer. Each
405 value contains the corresponding "materials-col" member attributes and will typically reflect
406 vendor and site ("third party") materials that are supported by the Printer.

407 **5.2.2 materials-col-default (1setOf collection)**

408 This Printer Description attribute lists the default materials that will be used if the
409 "materials-col" Job Template attribute is not specified.

410 **5.2.3 materials-col-ready (1setOf collection)**

411 This Printer Description attribute lists the materials that have been loaded into the Printer.
412 Each value contains the corresponding "materials-col" member attributes.

413 **5.2.4 materials-col-supported (1setOf type2 keyword)**

414 This Printer Description attribute lists the "materials-col" member attributes that are
415 supported by the Printer.

416 **5.2.5 material-diameter-supported (1setOf (integer | rangeOfInteger))**

417 This Printer Description attribute lists the supported diameters (or ranges of diameters) of
418 extruded material in nanometers.

419 **5.2.6 material-feed-rate-supported (1setOf (integer | rangeOfInteger))**

420 This Printer Description attribute lists the supported feed rates (or ranges of feed rates) in
421 nanometers per second.

422 [Editor's note: Some feedback indicates that we might want to specify feed rate using
423 volume...]

424 **5.2.7 material-type-supported (1setOf type2 keyword)**

425 This Printer Description attribute lists the supported material types for the Printer.

426 **5.2.8 print-fill-density-default (integer(0:100))**

427 This Printer Description attribute specifies the default "print-fill-density" value in percent.

428 **5.2.9 print-fill-thickness-default (integer(0:MAX))**

429 This Printer Description attribute specifies the default "print-fill-thickness" value in
430 nanometers.

431 **5.2.10 print-fill-thickness-supported (1setOf (integer(0:MAX) |
432 rangeOfInteger(0:MAX)))**

433 This Printer Description attribute lists the supported "print-fill-thickness" values (or ranges
434 of values) in nanometers.

435 **5.2.11 print-layer-order (type1 keyword)**

436 This Printer Description attribute specifies the order of layers when printing, either 'top-to-
437 bottom' or 'bottom-to-top'.

438 **5.2.12 print-layer-thickness-default (integer(0:MAX))**

439 This Printer Description attribute specifies the default "print-layer-thickness" value in
440 nanometers.

441 **5.2.13 print-layer-thickness-supported (1setOf (integer(0:MAX) |
442 rangeOfInteger(0:MAX)))**

443 This Printer Description attribute lists the supported values (or ranges of values) for the
444 "print-layer-thickness" Job Template attribute.

445 **5.2.14 print-rafts-default (type2 keyword)**

446 This Printer Description attribute specifies the default "print-rafts" value.

447 **5.2.15 print-rafts-supported (1setOf type2 keyword)**

448 This Printer Description attribute lists the supported "print-rafts" values.

449 **5.2.16 print-shell-thickness-default (integer(0:MAX))**

450 This Printer Description attribute specifies the default "print-shell-thickness" value in
451 nanometers.

452 **5.2.17 print-shell-thickness-supported (1setOf (integer(0:MAX) |
453 rangeOfInteger(0:MAX)))**

454 This Printer Description attribute lists the supported "print-shell-thickness" values (or
455 ranges of values) in nanometers.

456 **5.2.18 print-supports-default (type2 keyword)**

457 This Printer Description attribute specifies the default "print-supports" value.

458 **5.2.19 print-supports-supported (1setOf type2 keyword)**

459 This Printer Description attribute lists the supported "print-supports" values.

460 **5.2.20 printer-bed-temperature-default (integer | no-value)**

461 This Printer Description attribute specifies the default "printer-bed-temperature" value in
462 degrees Celsius.

463 **5.2.21 printer-bed-temperature-supported (1setOf (integer | rangeOfInteger))**

464 This Printer Description attribute lists the supported "printer-bed-temperature" values (or
465 ranges of values) in degrees Celsius.

466 **5.2.22 printer-chamber-temperature-default (integer | no-value)**

467 This Printer Description attribute specifies the default "printer-chamber-temperature" value
468 in degrees Celsius.

469 **5.2.23 printer-chamber-temperature-supported (1setOf (integer | rangeOfInteger))**

470 This Printer Description attribute lists the supported "printer-chamber-temperature" values
471 (or ranges of values) in degrees Celsius.

472 **5.2.24 printer-fan-speed-default (integer(0:MAX))**

473 This Printer Description attribute specifies the default "printer-fan-speed" value in percent.

474 **5.2.25 printer-fan-speed-supported (boolean)**

475 This Printer Description attribute specifies whether the "printer-fan-speed" Job Template
476 attribute is supported.

477 **5.2.26 printer-head-temperature-supported (1setOf integer | rangeOfInteger)**

478 This Printer Description attribute specifies the supported "printer-head-temperature" values
479 (or ranges of values) in degrees Celsius.

480 **5.2.27 filament-retraction-distance-supported (1setOf (integer(0:MAX) |
481 rangeOfInteger(0:MAX)))**

482 This Printer Description attribute specifies the supported "filament-retraction-distance"
483 values (or ranges of values) in nanometers.

484 **5.2.28 filament-speed-supported (1setof (integer(0:MAX) | rangeOfInteger(0:MAX)))**

485 This Printer Description attribute specifies the supported "filament-speed" values (or
486 ranges of values) in nanometers per second.

487 **5.2.29 print-speed-supported (1setOf integer(1:MAX) | rangeOfInteger(1:MAX))**

488 This Printer Description attribute lists the supported "print-speed" values (or ranges of
489 values) in nanometers per second.

490 5.2.30 printer-accuracy-supported (collection)

491 This Printer Description attribute specifies the absolute accuracy of the Printer. The "x-
492 accuracy (integer(1:MAX))", "y-accuracy (integer(1:MAX))", and "z-accuracy
493 (integer(1:MAX))" member attributes specify the accuracy in nanometers along each axis.

494 5.2.31 printer-volume-supported (collection)

495 This Printer Description attribute specifies the maximum build volume supported by the
496 Printer. The "x-dimension (integer(1:MAX))", "y-dimension (integer(1:MAX))", and "z-
497 dimension (integer(1:MAX))" member attributes specify the size in millimeters along each
498 axis.

499 5.3 Printer Status Attributes**500 5.3.1 printer-bed-temperature-current (integer | no-value)**

501 This Printer Status attribute provides the current Build Platform temperature in degrees
502 Celsius. If the Build Platform is not temperature controlled, the 'no-value' value is returned.

503 5.3.2 printer-chamber-temperature-current (integer | no-value)

504 This Printer Status attribute provides the current print chamber temperature in degrees
505 Celsius. If the print chamber is not temperature controlled, the 'no-value' value is returned.

506 5.3.3 printer-fan-speed-current (integer(0:100))

507 This Printer Status attribute provides the current fan speed in percent.

508 5.3.4 printer-head-temperature-current (1setOf (integer | no-value))

509 This Printer Status attribute provides the current extruder head temperatures in degrees
510 Celsius. The 'no-value' value is returned when the extruder head is not temperature
511 controlled.

512 5.4 Other Potential Attributes

513 Based on existing 3D printer software, the following parameters could also be candidates
514 for standardization:

- 515 1. Initial layer thickness in nanometers
- 516 2. Initial layer line width in percent
- 517 3. Dual extrusion overlap in nanometers
- 518 4. Travel speed in nanometers per second
- 519 5. Bottom layer speed in nanometers per second
- 520 6. Infill speed in nanometers per second
- 521 7. Outer shell speed in nanometers per second

- 522 8. Inner shell speed in nanometers per second
523 9. Minimum layer time in seconds or milliseconds

524 **6. New Values for Existing Attributes**

525 **6.1 ipp-features-supported (1setOf type2 keyword)**

526 This document suggests (but does not register) the new value 'ipp-3d'.

527 **6.2 printer-state-reasons (1setOf type2 keyword)**

528 This document suggests (but does not register) the following new values:

- 529 'camera-failure': A camera is no longer working.
530 'cutter-at-eol': A cutter has reached its end-of-life and will need to be replaced soon.
531 'cutter-failure': A cutter has failed.
532 'cutter-near-eol': A cutter is near its end-of-life and may need to be replaced soon.
533 'extruder-failure': An extruder has failed and requires maintenance or replacement.
534 'extruder-jam': An extruder is jammed or clogged.
535 'fan-failure': A fan has failed.
536 'lamp-at-eol': A lamp has reached its end-of-life and will need to be replaced soon.
537 'lamp-failure': A lamp has failed.
538 'lamp-near-eol': A lamp is near its end-of-life and may need to be replaced soon.
539 'laser-at-eol': A laser has reached its end-of-life and will need to be replaced soon.
540 'laser-failure': A laser has failed.
541 'laser-near-eol': A laser is near its end-of-life and may need to be replaced soon.
542 'material-empty': One or more build materials have been exhausted.
543 'material-low': One or more build materials may need replenishment soon.
544 'material-needed': One or more build materials need to be loaded for a processing
545 Job.
546 'motor-failure': A motor has failed.

- 547 'reservoir-empty': One or more reservoirs are empty.
548 'reservoir-low': One or more reservoirs are almost empty.
549 'reservoir-needed': One or more reservoirs are empty but need to be filled for a
550 processing Job.

551 **7. Object Definition Languages (ODLs)**

552 This section provides information on several commonly used ODLs with either existing
553 (registered) or suggested MIME media types.

554 **7.1 Additive Manufacturing Format (AMF)**

555 AMF [ISO52915] is a relatively new format that was designed as a replacement for the
556 Standard Tessellation Language (STL). Its use has been hampered by the lack of a freely-
557 available specification, but has several advantages over STL including:

- 558 1. Shared vertices which eliminates holes and other breaks in the surface
559 geometry of objects,
560 2. Specification of multiple materials in a single file,
561 3. Curved surfaces can be specified, and
562 4. Coordinates use explicit units for proper output dimensions.

563 The suggested (but not registered) MIME media type is model/amf'.

564 **7.2 Standard Tessellation Language (STL)**

565 STL [STLFORMAT] is widely supported by existing client software. The registered MIME
566 media type is 'application/sla'.

567 **7.3 G-Code**

568 The G-code [RS274] format has long been a common low-level format used by 3D
569 printers, with higher level formats being processed on the Client to produce G-code. The
570 suggested (but not registered) MIME media type is 'application/g-code'.

571 **7.4 S3G/X3G File Format**

572 The S3G protocol [S3G] defines a simple protocol for communicating a binary encoding of
573 G-code with a 3D printer. The encoding is also used as a low-level file format, typically
574 using a "x3g" extension. The suggested (but not registered) MIME media type is
575 'application/vnd.makerbot-s3g'.

576

577 8. Internationalization Considerations

578 For interoperability and basic support for multiple languages, conforming implementations
579 MUST support:

- 580 5. The Universal Character Set (UCS) Transformation Format -- 8 bit (UTF-8)
581 [STD63] encoding of Unicode [UNICODE] [ISO10646]; and
582 6. The Unicode Format for Network Interchange [RFC5198] which requires
583 transmission of well-formed UTF-8 strings and recommends transmission of
584 normalized UTF-8 strings in Normalization Form C (NFC) [UAX15].

585 Unicode NFC is defined as the result of performing Canonical Decomposition (into base
586 characters and combining marks) followed by Canonical Composition (into canonical
587 composed characters wherever Unicode has assigned them).

588 WARNING – Performing normalization on UTF-8 strings received from IPP Clients and
589 subsequently storing the results (e.g., in IPP Job objects) could cause false negatives in
590 IPP Client searches and failed access (e.g., to IPP Printers with percent-encoded UTF-8
591 URIs now 'hidden').

592 Implementations of this document SHOULD conform to the following standards on
593 processing of human-readable Unicode text strings, see:

- 594 Unicode Bidirectional Algorithm [UAX9] – left-to-right, right-to-left, and vertical
595 Unicode Line Breaking Algorithm [UAX14] – character classes and wrapping
596 Unicode Normalization Forms [UAX15] – especially NFC for [RFC5198]
597 Unicode Text Segmentation [UAX29] – grapheme clusters, words, sentences
598 Unicode Identifier and Pattern Syntax [UAX31] – identifier use and normalization
599 Unicode Character Encoding Model [UTR17] – multi-layer character model
600 Unicode in XML and other Markup Languages [UTR20] – XML usage
601 Unicode Character Property Model [UTR23] – character properties
602 Unicode Conformance Model [UTR33] – Unicode conformance basis+
603 Unicode Collation Algorithm [UTS10] – sorting
604 Unicode Locale Data Markup Language [UTS35] – locale databases

605 **9. Security Considerations**

606 In addition to the security considerations described in the IPP/1.1: Model and Semantics
607 [RFC2911], the following sub-sections describe issues that are unique to 3D printing.

608 Implementations of this specification SHOULD conform to the following standards on
609 processing of human-readable Unicode text strings, see:

610 Unicode Security Mechanisms [UTS39] – detecting and avoiding security attacks

611 Unicode Security FAQ [UNISECFAQ] – common Unicode security issues

612 [Editor's note: the rest is TBD but will include explosions, fires, and other physical risks that
613 have been documented in the news and various documents and studies]

614 **10. References**

615 [ISO10646] "Information technology -- Universal Coded Character Set (UCS)",
616 ISO/IEC 10646:2011

617 [ISO52915] "Standard Specification for Additive Manufacturing File Format (AMF)
618 Version 1.1", ISO/ASTM 52915, 2013

619 [PWG5100.12] R. Bergman, H. Lewis, I. McDonald, M. Sweet, "IPP/2.0 Second
620 Edition", PWG 5100.12-2011, February 2011,
621 <http://www.pwg.org/pub/pwg/candidates/cs-ipp20-2011MMDD-5100.12.pdf>

623 [PWG5100.14] M. Sweet, I. McDonald, A. Mitchell, J. Hutchings, "IPP Everywhere",
624 PWG 5100.14, January 2013,
625 <http://ftp.pwg.org/pub/pwg/candidates/cs-ippeve10-20130128.pdf>

626 [RFC2911] T. Hastings, R. Herriot, R. deBry, S. Isaacson, P. Powell, "Internet
627 Printing Protocol/1.1: Model and Semantics", RFC 2911, September
628 2000, <http://www.ietf.org/rfc/rfc2911.txt>

629 [RFC3805] R. Bergman, H. Lewis, I. McDonald, "Printer MIB v2", RFC 3805, June
630 2004, <http://www.ietf.org/rfc/rfc3805.txt>

631 [RFC5198] J. Klensin, M. Padlipsky, "Unicode Format for Network Interchange",
632 RFC 5198, March 2008, <http://www.ietf.org/rfc/rfc5198.txt>

633 [RS274D] "Interchangeable Variable Block Data Format for Positioning,
634 Contouring, and Contouring/Positioning Numerically Controlled
635 Machines", EIA Standard RS-274-D, February 1979

- 636 [S3G] Makerbot Industries, "S3G protocol (formerly RepRap Generation 3
637 Protocol Specification",
638 <https://github.com/makerbot/s3g/blob/master/doc/s3gProtocol.md>
- 639 [STD63] F. Yergeau, "UTF-8, a transformation format of ISO 10646", RFC
640 3629/STD 63, November 2003, <http://www.ietf.org/rfc/rfc3629.txt>
- 641 [STLFORMAT] 3D Systems, Inc., "SLC File Specification", 1994
- 642 [UAX9] Unicode Consortium, "Unicode Bidirectional Algorithm", UAX#9, June
643 2014,
644 <http://www.unicode.org/reports/tr9/tr9-31.html>
- 645 [UAX14] Unicode Consortium, "Unicode Line Breaking Algorithm", UAX#14,
646 June 2014,
647 <http://www.unicode.org/reports/tr14/tr14-33.html>
- 648 [UAX15] Unicode Consortium, "Normalization Forms", UAX#15, June 2014,
649 <http://www.unicode.org/reports/tr15/tr15-41.html>
- 650 [UAX29] Unicode Consortium, "Unicode Text Segmentation", UAX#29, June
651 2014,
652 <http://www.unicode.org/reports/tr29/tr29-25.html>
- 653 [UAX31] Unicode Consortium, "Unicode Identifier and Pattern Syntax",
654 UAX#31, June 2014,
655 <http://www.unicode.org/reports/tr31/tr31-21.html>
- 656 [UNICODE] Unicode Consortium, "Unicode Standard", Version 7.0.0, June 2014,
657 <http://www.unicode.org/versions/Unicode7.0.0/>
- 658 [UNISECFAQ] Unicode Consortium "Unicode Security FAQ", November 2013,
659 <http://www.unicode.org/faq/security.html>
- 660 [UTR17] Unicode Consortium "Unicode Character Encoding Model", UTR#17,
661 November 2008,
662 <http://www.unicode.org/reports/tr17/tr17-7.html>
- 663 [UTR20] Unicode Consortium "Unicode in XML and other Markup Languages",
664 UTR#20, January 2013,
665 <http://www.unicode.org/reports/tr20/tr20-9.html>
- 666 [UTR23] Unicode Consortium "Unicode Character Property Model", UTR#23,
667 November 2008,
668 <http://www.unicode.org/reports/tr23/tr23-9.html>

- 669 [UTR33] Unicode Consortium “Unicode Conformance Model”, UTR#33,
670 November 2008,
671 <http://www.unicode.org/reports/tr33/tr33-5.html>
- 672 [UTS10] Unicode Consortium, “Unicode Collation Algorithm”, UTS#10, June
673 2014,
674 <http://www.unicode.org/reports/tr10/tr10-30.html>,
- 675 [UTS35] Unicode Consortium, “Unicode Locale Data Markup Language”,
676 UTS#35, September 2014,
677 <http://www.unicode.org/reports/tr35/tr35-37/tr35.html>
- 678 [UTS39] Unicode Consortium, “Unicode Security Mechanisms”, UTS#39,
679 September 2014,
680 <http://www.unicode.org/reports/tr39/tr39-9.html>

681 **11. Author's Address**

682 Primary author:

683 Michael Sweet
684 Apple Inc.
685 1 Infinite Loop
686 MS 111-HOMC
687 Cupertino, CA 95014
688 msweet@apple.com

689 The authors would also like to thank the following individuals for their contributions to this
690 standard:

691 Olliver Schinagl, Ultimaker B.V.

692 12. Change History**693 12.1 April 5, 2015**

- 694 1. Updated front matter to remove IEEE-ISTO boilerplate.
- 695 2. Fixed various typos
- 696 3. Clarified that SLC files are commonly known as STL files.
- 697 4. Clarified that S3G is a binary version of G-code with a standard packet format.
- 698 5. Added use case for printing with loaded materials
- 699 6. Added use case for multi-material printing on a single material printer.
- 700 7. Added use case for monitoring print progress visually with a web cam.
- 701 8. Added exception for "skipping" (insufficient material flow/feed)
- 702 9. Added exception for adhesion issues
- 703 10. Added exception for build plate being full.
- 704 11. Added exception for head movement issues.
- 705 12. Added figure showing the typical coordinate system.
- 706 13. Expanded Job Template and Printer Description details, added comments for discussion.
- 708 14. Added new Unicode considerations and references.

709 12.2 January 23, 2015

710 Initial revision.