1	INTERNET-DRAFT BakeOff2 issue 1-36 resolutions are flagged as Issue nn and can be searched for draft-ietf-ipp-model-v11-03.txt
3	R. deBry
4	Utah Valley State College
5	T. Hastings (editor)
6	Xerox Corporation
7	R. Herriot
8	Xerox Corporation
9	S. Isaacson
0	Novell, Inc. P. Powell
1  2	Astart Technologies
3	June 11, 1998
4	oune 11, 1996
5	Internet Printing Protocol/1.1: Model and Semantics
6	Copyright (C) The Internet Society (1999). All Rights Reserved.
7	Status of this Memo
18 19 20 21	This document is an Internet-Draft and is in full conformance with all provisions of Section 10 of [RFC2026]. Internet-Drafts are working documents of the Internet Engineering Task Force (IETF), its areas, and its working groups. Note that other groups may also distribute working documents as Internet-Drafts.
22 23 24	Internet-Drafts are draft documents valid for a maximum of six months and may be updated, replaced, or obsoleted by other documents at any time. It is inappropriate to use Internet-Drafts as reference material or to cite them other than as "work in progress".
25	The list of current Internet-Drafts can be accessed at http://www.ietf.org/ietf/1id-abstracts.txt
26	The list of Internet-Draft Shadow Directories can be accessed as http://www.ietf.org/shadow.html.
27	Abstract
28 29 30 31 32 33 34 4 35 36 37	This document is one of a set of documents, which together describe all aspects of a new Internet Printing Protocol (IPP). IPP is an application level protocol that can be used for distributed printing using Internet tools and technologies. This document describes a simplified model consisting of abstract objects, their attributes, and their operations that is independent of encoding and transport. The model consists of a Printer and a Job object. A Job optionally supports multiple documents. IPP 1.1 semantics allow end-users and operators to query printer capabilities, submit print jobs, inquire about the status of print jobs and printers, cancel, hold, release, and restart print jobs. IPP 1.1 semantics allow operators to pause, resume, and purge (jobs from) Printer objects. This document also addresses security, internationalization, and directory issues.  The full set of IPP documents includes:  Design Goals for an Internet Printing Protocol [RFC2567]  Rationale for the Structure and Model and Protocol for the Internet Printing Protocol [RFC2568]

- Internet Printing Protocol/1.1: Model and Semantics (this document)
  Internet Printing Protocol/1.1: Encoding and Transport [IPP-PRO]
- Internet Printing Protocol/1.1: Implementer's Guide [IPP-IIG]
- Mapping between LPD and IPP Protocols [RFC2569]

- The "Design Goals for an Internet Printing Protocol" document takes a broad look at distributed printing
- functionality, and it enumerates real-life scenarios that help to clarify the features that need to be included
- in a printing protocol for the Internet. It identifies requirements for three types of users: end users,
- operators, and administrators. It calls out a subset of end user requirements that are satisfied in IPP/1.0. A
- few OPTIONAL operator operations have been added to IPP/1.1.
- The "Rationale for the Structure and Model and Protocol for the Internet Printing Protocol" document
- describes IPP from a high level view, defines a roadmap for the various documents that form the suite of
- 52 IPP specification documents, and gives background and rationale for the IETF working group's major
- 53 decisions.
- The "Internet Printing Protocol/1.1: Encoding and Transport" document is a formal mapping of the abstract
- operations and attributes defined in the model document onto HTTP/1.1. It defines the encoding rules for a
- new Internet MIME media type called "application/ipp". This document also defines the rules for
- transporting over HTTP a message body whose Content-Type is "application/ipp". This document defines a
- new scheme named 'ipp' for identifying IPP printers and jobs. Finally, this document defines
- interoperability rules for supporting IPP/1.0 clients. Issue 33
- The "Internet Printing Protocol/1.1: Implementer's Guide" document gives insight and advice to
- implementers of IPP clients and IPP objects. It is intended to help them understand IPP/1.1 and some of the
- considerations that may assist them in the design of their client and/or IPP object implementations. For
- example, a typical order of processing requests is given, including error checking. Motivation for some of
- the specification decisions is also included.
- The "Mapping between LPD and IPP Protocols" document gives some advice to implementers of gateways
- between IPP and LPD (Line Printer Daemon) implementations.

## **Table of Contents**

68	1. Introduction	10
69	1.1 Simplified Printing Model	11
70	2. IPP Objects	13
71	2.1 Printer Object	
72	2.2 Job Object	
73	2.3 Object Relationships	
74	2.4 Object Identity	
75	3. IPP Operations	19
76	3.1 Common Semantics	20
77	3.1.1 Required Parameters	20
78	3.1.2 Operation IDs and Request IDs	21
79	3.1.3 Attributes	21
80	3.1.4 Character Set and Natural Language Operation Attributes	22
81	3.1.4.1 Request Operation Attributes	
82	3.1.4.2 Response Operation Attributes	25
83	3.1.5 Operation Targets	26
84	3.1.6 Operation Response Status Codes and Status Messages	28
85	3.1.6.1 "status-code" (type2 enum)	28
86	3.1.6.2 "status-message" (text(255))	28
87	3.1.6.3 "detailed-status-message" (text(MAX)) Issue 35	29
88	3.1.6.4 "document-access-error" (text(MAX)) Issue 35	29
89	3.1.7 Unsupported Attributes	
90	3.1.8 Versions	31
91	3.1.9 Job Creation Operations	32
92	3.2 Printer Operations	34
93	3.2.1 Print-Job Operation	34
94	3.2.1.1 Print-Job Request	35
95	3.2.1.2 Print-Job Response	38
96	3.2.2 Print-URI Operation	40
97	3.2.3 Validate-Job Operation	41
98	3.2.4 Create-Job Operation	41
99	3.2.5 Get-Printer-Attributes Operation	42
100	3.2.5.1 Get-Printer-Attributes Request	42
101	3.2.5.2 Get-Printer-Attributes Response	44
102	3.2.6 Get-Jobs Operation	45
103	3.2.6.1 Get-Jobs Request	45
104	3.2.6.2 Get-Jobs Response	46
105	3.2.7 Pause-Printer Operation	47
106	3.2.7.1 Pause-Printer Request	
107	3.2.7.2 Pause-Printer Response	
108	3.2.8 Resume-Printer Operation	49

109	3.2.9 Purge-Jobs Operation	50
110	3.3 Job Operations	51
111	3.3.1 Send-Document Operation	51
112	3.3.1.1 Send-Document Request	52
113	3.3.1.2 Send-Document Response	53
114	3.3.2 Send-URI Operation	54
115	3.3.3 Cancel-Job Operation	54
116	3.3.3.1 Cancel-Job Request	55
117	3.3.3.2 Cancel-Job Response	55
118	3.3.4 Get-Job-Attributes Operation	56
119	3.3.4.1 Get-Job-Attributes Request	56
120	3.3.4.2 Get-Job-Attributes Response	57
121	3.3.5 Hold-Job Operation	58
122	3.3.5.1 Hold-Job Request	59
123	3.3.5.2 Hold-Job Response	59
124	3.3.6 Release-Job Operation	59
125	3.3.7 Restart-Job Operation	60
126	3.3.7.1 Restart-Job Request	61
127	3.3.7.2 Restart-Job Response	62
128	4. Object Attributes	62
129	4.1 Attribute Syntaxes	
130	4.1.1 'text'	
131	4.1.1.1 'textWithoutLanguage'	
132	4.1.1.2 'textWithLanguage'	
133	4.1.2 'name'	
134	4.1.2.1 'nameWithoutLanguage'	
135	4.1.2.2 'nameWithLanguage'	
136	4.1.2.3 Matching 'name' attribute values	
137	4.1.3 'keyword'	
138	4.1.4 'enum'	67
139	4.1.5 'uri'	68
140	4.1.6 'uriScheme'	
141	4.1.7 'charset'	68
142	4.1.8 'naturalLanguage'	69
143	4.1.9 'mimeMediaType'	
144	4.1.9.1 Application/octet-stream Auto-Sensing the document format	70
145	4.1.10 'octetString'	
146	4.1.11 'boolean'	
147	4.1.12 "integer"	71
148	4.1.13 'rangeOfInteger'	
149	4.1.14 'dateTime'	
150	4.1.15 'resolution'	
151	4.1.16 '1setOf X'	
152	4.2 Joh Template Attributes	

153	4.2.1	job-priority (integer(1:100))	
154	4.2.2	job-hold-until (type3 keyword   name (MAX))	76
155	4.2.3	job-sheets (type3 keyword   name(MAX))	76
156	4.2.4	multiple-document-handling (type2 keyword)	
157	4.2.5	copies (integer(1:MAX))	
158	4.2.6	finishings (1setOf type2 enum)	
159	4.2.7	page-ranges (1setOf rangeOfInteger (1:MAX))	80
160	4.2.8	sides (type2 keyword)	
161	4.2.9	number-up (integer(1:MAX))	
162	4.2.10	orientation-requested (type2 enum)	82
163	4.2.11	media (type3 keyword   name(MAX))	
164	4.2.12	printer-resolution (resolution)	83
165	4.2.13	print-quality (type2 enum)	83
166	4.3 Jol	b Description Attributes	84
167	4.3.1	job-uri (uri)	86
168	4.3.2	job-id (integer(1:MAX))	86
169	4.3.3	job-printer-uri (uri)	86
170	4.3.4	job-more-info (uri)	
171	4.3.5	job-name (name(MAX))	87
172	4.3.6	job-originating-user-name (name(MAX))	
173	4.3.7	job-state (type1 enum)	87
174	4.3.7.	1 Forwarding Servers Issue 14	89
175	4.3.7.		
176	4.3.8	job-state-reasons (1setOf type2 keyword)	90
177	4.3.9	job-state-message (text(MAX))	
178	4.3.10	job-detailed-status-messages (1setOf text(MAX)) Issue 35	94
179	4.3.11	job-document-access-errors (1setOf text(MAX)) Issue 35	94
180	4.3.12	number-of-documents (integer(0:MAX))	94
181	4.3.13	output-device-assigned (name(127))	
182	4.3.14	Event Time Job Description Attributes Issue 17	95
183	4.3.14	4.1 time-at-creation (integer(MIN:MAX))	95
184	4.3.14	4.2 time-at-processing (integer(MIN:MAX))	
185	4.3.14	time-at-completed (integer(MIN:MAX))	95
186	4.3.14	J 1 \ \ \ \ \ \ //	
187	4.3.14		
188	4.3.14		
189	4.3.14	1 ' '	
190	4.3.15	number-of-intervening-jobs (integer(0:MAX))	96
191	4.3.16	job-message-from-operator (text(127))	96
192	4.3.17	Job Size Attributes	
193	4.3.17	7.1 job-k-octets (integer(0:MAX))	97
194	4.3.17	3 1 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	
195	4.3.17	3 \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	
196	4.3.18	Job Progress Attributes	98
197	4.3.18	3.1 job-k-octets-processed (integer(0:MAX))	98

198		3.2 job-impressions-completed (integer(0:MAX))	
199	4.3.18	.3 job-media-sheets-completed (integer(0:MAX))	98
200	4.3.19	attributes-charset (charset)	98
201	4.3.20	attributes-natural-language (naturalLanguage)	
202	4.4 Pri	nter Description Attributes	
203	4.4.1	printer-uri-supported (1setOf uri)	
204	4.4.2	uri-authentication-supported (1setOf type2 keyword) Issue 2	101
205	4.4.3	uri-security-supported (1setOf type2 keyword)	
206	4.4.4	printer-name (name(127))	103
207	4.4.5	printer-location (text(127))	103
208	4.4.6	printer-info (text(127))	104
209	4.4.7	printer-more-info (uri)	
210	4.4.8	printer-driver-installer (uri)	
211	4.4.9	printer-make-and-model (text(127))	104
212	4.4.10	printer-more-info-manufacturer (uri)	104
213	4.4.11	printer-state (type1 enum)	104
214	4.4.12	printer-state-reasons (1setOf type2 keyword)	105
215	4.4.13	printer-state-message (text(MAX))	107
216	4.4.14	ipp-versions-supported (1setOf type2 keyword) Issue 36	107
217	4.4.15	operations-supported (1setOf type2 enum)	108
218	4.4.16	multiple-document-jobs-supported (boolean) Issue 34	108
219	4.4.17	charset-configured (charset)	
220	4.4.18	charset-supported (1setOf charset)	109
221	4.4.19	natural-language-configured (naturalLanguage)	109
222	4.4.20	generated-natural-language-supported (1setOf naturalLanguage)	109
223	4.4.21	document-format-default (mimeMediaType)	110
224	4.4.22	document-format-supported (1setOf mimeMediaType)	110
225	4.4.23	printer-is-accepting-jobs (boolean)	110
226	4.4.24	queued-job-count (integer(0:MAX))	110
227	4.4.25	printer-message-from-operator (text(127))	110
228	4.4.26	color-supported (boolean)	110
229	4.4.27	reference-uri-schemes-supported (1setOf uriScheme)	111
230	4.4.28	pdl-override-supported (type2 keyword)	111
231	4.4.29	printer-up-time (integer(1:MAX))	111
232	4.4.30	printer-current-time (dateTime)	112
233	4.4.31	multiple-operation-time-out (integer(1:MAX))	112
234	4.4.32	compression-supported (1setOf type3 keyword)	112
235	4.4.33	job-k-octets-supported (rangeOfInteger(0:MAX))	113
236	4.4.34	job-impressions-supported (rangeOfInteger(0:MAX))	113
237	4.4.35	job-media-sheets-supported (rangeOfInteger(0:MAX))	113
238	4.4.36	pages-per-minute (integer(0:MAX))	
239	4.4.37	pages-per-minute-color (integer(0:MAX))	113
240	5. Confo	rmance	114
241	5.1 Cli	ent Conformance Requirements	114

242	5.2 IPP Object Conformance Requirements	115
243	5.2.1 Objects	115
244	5.2.2 Operations	115
245	5.2.3 IPP Object Attributes	116
246	5.2.4 Versions	116
247	5.2.5 Extensions	117
248	5.2.6 Attribute Syntaxes	117
249	5.2.7 Security Issue 32	117
250	5.3 Charset and Natural Language Requirements	117
251	6. IANA Considerations (registered and private extensions)	
252	6.1 Typed 'keyword' and 'enum' Extensions	118
253	6.2 Attribute Extensibility	120
254	6.3 Attribute Syntax Extensibility	121
255	6.4 Operation Extensibility	121
256	6.5 Attribute Groups	121
257	6.6 Status Code Extensibility	
258	6.7 Registration of MIME types/sub-types for document-formats	122
259	6.8 Registration of charsets for use in 'charset' attribute values	122
260	7. Internationalization Considerations	122
261	8. Security Considerations	125
262	8.1 Security Scenarios	
263	8.1.1 Client and Server in the Same Security Domain	126
264	8.1.2 Client and Server in Different Security Domains	126
265	8.1.3 Print by Reference	126
266	8.2 URIs in Operation, Job, and Printer attributes	
267	8.3 URIs for each authentication mechanisms	127
268	8.4 Restricted Queries	
269	8.5 Operations performed by operators and system administrators	
270	8.6 Queries on jobs submitted using non-IPP protocols	128
271	9. References	128
272	10. Author's Address	132
273	11. Formats for IPP Registration Proposals	135
274	11.1 Type2 keyword attribute values registration	135
275	11.2 Type3 keyword attribute values registration	135
276	11.3 Type2 enum attribute values registration	135
277	11.4 Type3 enum attribute values registration	136
278	11.5 Attribute registration	
279	11.6 Attribute Syntax registration	137
280	11.7 Operation registration.	137
281	11.8 Attribute Group registration	137

282	11.9 Status code registration	138
283	12. APPENDIX A: Terminology	138
284	12.1 Conformance Terminology	
285	12.1.1 NEED NOT	
286	12.2 Model Terminology	
287	12.2.1 Keyword	
288	12.2.2 Attributes	
289	12.2.2.1 Attribute Name	
290	12.2.2.2 Attribute Group Name	139
291	12.2.2.3 Attribute Value	
292	12.2.2.4 Attribute Syntax	139
293	12.2.3 Supports	
294	12.2.4 print-stream page	
295	12.2.5 impression	
	12 ADDENDIV D. Status Codes and Suggested Status Code Massages	1.41
296 297	13. APPENDIX B: Status Codes and Suggested Status Code Messages	
297 298	13.1.1 Informational	
290 299	13.1.2 Successful Status Codes	
300	13.1.2.1 successful-ok (0x0000)	
301	13.1.2.2 successful-ok-ignored-or-substituted-attributes (0x0001)	
302	13.1.2.3 successful-ok-conflicting-attributes (0x0002)	
303	13.1.3 Redirection Status Codes	
304	13.1.4 Client Error Status Codes	
305	13.1.4.1 client-error-bad-request (0x0400)	
306	13.1.4.2 client-error-forbidden (0x0401)	
307	13.1.4.3 client-error-not-authenticated (0x0402)	
308	13.1.4.4 client-error-not-authorized (0x0403)	
309	13.1.4.5 client-error-not-possible (0x0404)	
310	13.1.4.6 client-error-timeout (0x0405)	
311	13.1.4.7 client-error-not-found (0x0406)	144
312	13.1.4.8 client-error-gone (0x0407)	145
313	13.1.4.9 client-error-request-entity-too-large (0x0408)	
314	13.1.4.10 client-error-request-value-too-long (0x0409)	145
315	13.1.4.11 client-error-document-format-not-supported (0x040A)	146
316	13.1.4.12 client-error-attributes-or-values-not-supported (0x040B)	
317	13.1.4.13 client-error-uri-scheme-not-supported (0x040C)	146
318	13.1.4.14 client-error-charset-not-supported (0x040D)	146
319	13.1.4.15 client-error-conflicting-attributes (0x040E)	146
320	13.1.4.16 client-error-compression-not-supported (0x040F) Issue 6	
321	13.1.4.17 client-error-compression-error (0x0410) Issue 6	
322	13.1.4.18 client-error-document-format-error (0x0411) Issue 28	
323	13.1.4.19 client-error-document-access-error (0x0412) Issue 35	
324	13.1.5 Server Error Status Codes	
325	13.1.5.1 server-error-internal-error (0x0500)	147

326	13.1.5.2	server-error-operation-not-supported (0x0501)	148
327	13.1.5.3	server-error-service-unavailable (0x0502)	
328	13.1.5.4	server-error-version-not-supported (0x0503)	148
329	13.1.5.5	server-error-device-error (0x0504)	
330	13.1.5.6	server-error-temporary-error (0x0505)	149
331	13.1.5.7	server-error-not-accepting-jobs (0x0506)	149
332	13.1.5.8	server-error-busy (0x0507)	149
333	13.1.5.9	server-error-job-canceled (0x0508)	149
334	13.1.5.10	server-error-multiple-document-jobs-not-supported (0x0509) Issue 34	149
335	13.2 Status	Codes for IPP Operations	150
336 337		OIX C: "media" keyword values  OIX D: Processing IPP Attributes	
338		y	
339		Description Language (PDL) Override	
340	_	Job Template Attributes During Document Processing.	
	C		
341	16. APPEND	OIX E: Generic Directory Schema	159
342	17. APPEND	DIX F: Differences between the IPP/1.0 and IPP/1.1 "Model and Semantics"	Documents162
343	18. Full Copy	yright Statement	167
244			

#### 1. Introduction

- The Internet Printing Protocol (IPP) is an application level protocol that can be used for distributed printing
- using Internet tools and technologies. IPP version 1.1 (IPP/1.1) focuses only on end user functionality.
- This document is just one of a suite of documents that fully define IPP. The full set of IPP documents
- 349 includes:
- Design Goals for an Internet Printing Protocol [RFC2567]
- Rationale for the Structure and Model and Protocol for the Internet Printing Protocol [RFC2568]
- Internet Printing Protocol/1.1: Model and Semantics (this document)
- Internet Printing Protocol/1.1: Encoding and Transport [IPP-PRO]
  - Internet Printing Protocol/1.1: Implementer's Guide [IPP-IIG]
- Mapping between LPD and IPP Protocols [RFC2569]

356

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

354

345

Anyone reading these documents for the first time is strongly encouraged to read the IPP documents in the above order.

#### This document is laid out as follows:

- The rest of Section 1 is an introduction to the IPP simplified model for distributed printing.
- Section 2 introduces the object types covered in the model with their basic behaviors, attributes, and interactions.
- Section 3 defines the operations included in IPP/1.1. IPP operations are synchronous, therefore, for each operation, there is a both request and a response.
- Section 4 defines the attributes (and their syntaxes) that are used in the model.
- Sections 5 6 summarizes the implementation conformance requirements for objects that support the protocol and IANA considerations, respectively.
- Sections 7 11 cover the Internationalization and Security considerations as well as References, Author contact information, and Formats for Registration Proposals.
- Sections 12 14 are appendices that cover Terminology, Status Codes and Messages, and "media" keyword values.

Note: This document uses terms such as "attributes", "keywords", and "support". These terms have special meaning and are defined in the model terminology section 12.2.

Capitalized terms, such as MUST, MUST NOT, REQUIRED, SHOULD, SHOULD NOT, MAY, NEED NOT, and OPTIONAL, have special meaning relating to conformance. These

terms are defined in section 12.1 on conformance terminology, most of which is taken from RFC 2119 [RFC2119].

- Section 15 is an appendix that helps to clarify the effects of interactions between related attributes and their values.
- Section 16 is an appendix that enumerates the subset of Printer attributes that form a generic directory schema. These attributes are useful when registering a Printer so that a client can find the Printer not just by name, but by filtered searches as well.
- Section 17 is an appendix summarizing the additions and changes from the IPP/1.0 "Model and Semantics" document [RFC2566] to make this IPP/1.1 document.
- Section 18 is the full copyright notice.

## 1.1 Simplified Printing Model


In order to achieve its goal of realizing a workable printing protocol for the Internet, the Internet Printing 387 Protocol (IPP) is based on a simplified printing model that abstracts the many components of real world 388 printing solutions. The Internet is a distributed computing environment where requesters of print services 389 (clients, applications, printer drivers, etc.) cooperate and interact with print service providers. This model 390 and semantics document describes a simple, abstract model for IPP even though the underlying 391 configurations may be complex "n-tier" client/server systems. An important simplifying step in the IPP 392 model is to expose only the key objects and interfaces required for printing. The model described in this 393 model document does not include features, interfaces, and relationships that are beyond the scope of the 394 first version of IPP (IPP/1.1). IPP/1.1 incorporates many of the relevant ideas and lessons learned from 395 other specification and development efforts [HTPP] [ISO10175] [LDPA] [P1387.4] [PSIS] [RFC1179] 396 [SWP]. IPP is heavily influenced by the printing model introduced in the Document Printing Application 397 (DPA) [ISO10175] standard. Although DPA specifies both end user and administrative features, IPP 398 version 1.1 (IPP/1.1) focuses primarily on end user functionality with a few additional OPTIONAL operator 399 operations. 400

The IPP/1.1 model encapsulates the important components of distributed printing into two object types:

- Printer (Section 2.1)
  - Job (Section 2.2)

403 404 405

- Each object type has an associated set of operations (see section 3) and attributes (see section 4).
- It is important, however, to understand that in real system implementations (which lie underneath the abstracted IPP/1.1 model), there are other components of a print service which are not explicitly defined in the IPP/1.1 model. The following figure illustrates where IPP/1.1 fits with respect to these other
- 409 components.

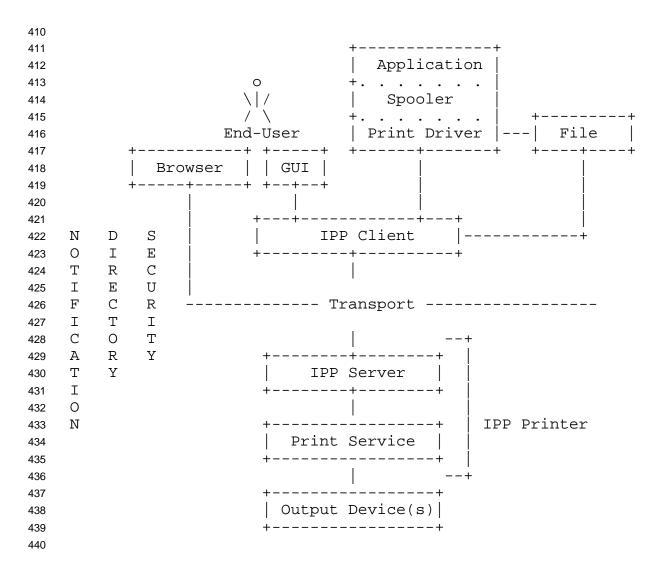

An IPP Printer object encapsulates the functions normally associated with physical output devices along with the spooling, scheduling and multiple device management functions often associated with a print server. Printer objects are optionally registered as entries in a directory where end users find and select them based on some sort of filtered and context based searching mechanism (see section 16). The directory is used to store relatively static information about the Printer, allowing end users to search for and find Printers that match their search criteria, for example: name, context, printer capabilities, etc. The more dynamic information, such as state, currently loaded and ready media, number of jobs at the Printer, errors, warnings, and so forth, is directly associated with the Printer object itself rather than with the entry in the directory which only represents the Printer object.

IPP clients implement the IPP protocol on the client side and give end users (or programs running on behalf of end users) the ability to query Printer objects and submit and manage print jobs. An IPP server is just that part of the Printer object that implements the server-side protocol. The rest of the Printer object implements (or gateways into) the application semantics of the print service itself. The Printer objects may be embedded in an output device or may be implemented on a host on the network that communicates with an output device.

- When a job is submitted to the Printer object and the Printer object validates the attributes in the
- submission request, the Printer object creates a new Job object. The end user then interacts with this new
- Job object to query its status and monitor the progress of the job. An end user can also cancel their print
- jobs by using the Job object's Cancel-Job operation. An end-user can also hold, release, and restart their
- print jobs using the Job object's OPTIONAL Hold-Job, Release-Job, and Restart-Job operations, if
- implemented.
- A privileged operator or administrator of a Printer object can cancel, hold, release, and restart any user's job
- using the REQUIRED Cancel-Job and the OPTIONAL Hold-Job, Release-Job, and Restart-Job operations.
- In additional privileged operator or administrator of a Printer object can pause, resume, or purge (jobs from)
- a Printer object using the OPTIONAL Pause-Printer, Resume-Printer, and Purge-Jobs operations, if
- 466 implemented.
- The notification service is out of scope for this IPP/1.1 document, but using such a notification service, the
- end user is able to register for and receive Printer specific and Job specific events. An end user can query
- the status of Printer objects and can follow the progress of Job objects by polling using the Get-Printer-
- 470 Attributes, Get-Jobs, and Get-Job-Attributes operations.
- 2. IPP Objects
- The IPP/1.1 model introduces objects of type Printer and Job. Each type of object models relevant aspects
- of a real-world entity such as a real printer or real print job. Each object type is defined as a set of possible
- attributes that may be supported by instances of that object type. For each object (instance), the actual set
- of supported attributes and values describe a specific implementation. The object's attributes and values
- describe its state, capabilities, realizable features, job processing functions, and default behaviors and
- characteristics. For example, the Printer object type is defined as a set of attributes that each Printer object
- potentially supports. In the same manner, the Job object type is defined as a set of attributes that are
- potentially supported by each Job object.
- Each attribute included in the set of attributes defining an object type is labeled as:
- "REQUIRED": each object MUST support the attribute.
- "RECOMMENDED": each object SHOULD support the attribute.
- "OPTIONAL": each object MAY support the attribute.
- 484

- Some definitions of attribute values indicate that an object MUST or SHOULD support the value;
- otherwise, support of the value is OPTIONAL. However, if an implementation supports an attribute, it
- 487 MUST support at least one of the possible values for that attribute.
  - 2.1 Printer Object
- The major component of the IPP/1.1 model is the Printer object. A Printer object implements the server-
- side of the IPP/1.1 protocol. Using the protocol, end users may query the attributes of the Printer object and
- submit print jobs to the Printer object. The actual implementation components behind the Printer

498

499

500 501

502

503

504

505

506

507

508

509

510 511

517

518

519

520

523

abstraction may take on different forms and different configurations. However, the model abstraction allows the details of the configuration of real components to remain opaque to the end user. Section 3 describes each of the Printer operations in detail.

- The capabilities and state of a Printer object are described by its attributes. Printer attributes are divided into two groups:
  - "job-template" attributes: These attributes describe supported job processing capabilities and defaults for the Printer object. (See section 4.2)
  - "printer-description" attributes: These attributes describe the Printer object's identification, state, location, references to other sources of information about the Printer object, etc. (see section 4.4)

Since a Printer object is an abstraction of a generic document output device and print service provider, a Printer object could be used to represent any real or virtual device with semantics consistent with the Printer object, such as a fax device, an imager, or even a CD writer.

- Some examples of configurations supporting a Printer object include:
  - 1) An output device with no spooling capabilities
  - 2) An output device with a built-in spooler
  - 3) A print server supporting IPP with one or more associated output devices
    - 3a) The associated output devices may or may not be capable of spooling jobs
    - 3b) The associated output devices may or may not support IPP
- The following figures show some examples of how Printer objects can be realized on top of various distributed printing configurations. The embedded case below represents configurations 1 and 2. The hosted and fan-out figures below represent configurations 3a and 3b.
- In this document the term "client" refers to a software entity that sends IPP operation requests to an IPP Printer object and accepts IPP operation responses. A client MAY be:
  - 1. contained within software controlled by an end user, e.g. activated by the "Print" menu item in an application or
    - 2. the print server component that sends IPP requests to either an output device or another "downstream" print server.
- The term "IPP Printer" is a network entity that accepts IPP operation requests and returns IPP operation responses. As such, an IPP object MAY be:
  - 1. an (embedded) device component that accepts IPP requests and controls the device or
- 2. a component of a print server that accepts IPP requests (where the print server controls one or more networked devices using IPP or other protocols). Issue 4

```
Legend:
527
528
   ##### indicates a Printer object which is
529
        either embedded in an output device or is
530
        hosted in a server. The Printer object
531
        might or might not be capable of queuing/spooling.
532
533
        indicates any network protocol or direct
   any
534
        connect, including IPP
535
536
537
   embedded printer:
538
                                      output device
539
540
                                     ##########
541
   542
                                     | # Object #
543
544
545
546
547
   hosted printer:
548
549
    O +----+ ##########
550
   /|\ | client |--IPP--># Printer #-any->| output device |
551
   552
553
554
555
556
557
   fan out:
558
                                  +-->| output device |
559
                               any/
560
    0 +----+ ######### /
561
   562
   / \ +----+ # Object # \
                   ######### any\
564
                                  +-->| output device |
565
566
567
568
569
```

#### 2.2 Job Object

570

571

572

A Job object is used to model a print job. A Job object contains documents. The information required to create a Job object is sent in a create request from the end user via an IPP Client to the Printer object. The

578

579

580

581 582

585

586

587 588

592

- Printer object validates the create request, and if the Printer object accepts the request, the Printer object creates the new Job object. Section 3 describes each of the Job operations in detail.
- The characteristics and state of a Job object are described by its attributes. Job attributes are grouped into two groups as follows:
  - "job-template" attributes: These attributes can be supplied by the client or end user and include job processing instructions which are intended to override any Printer object defaults and/or instructions embedded within the document data. (See section 4.2)
  - "job-description" attributes: These attributes describe the Job object's identification, state, size, etc.

    The client supplies some of these attributes, and the Printer object generates others. (See section 4.3)

An implementation MUST support at least one document per Job object. An implementation MAY support multiple documents per Job object. A document is either:

- a stream of document data in a format supported by the Printer object (typically a Page Description Language PDL), or
- a reference to such a stream of document data

In IPP/1.1, a document is not modeled as an IPP object, therefore it has no object identifier or associated attributes. All job processing instructions are modeled as Job object attributes. These attributes are called Job Template attributes and they apply equally to all documents within a Job object.

### 2.3 Object Relationships

- 593 IPP objects have relationships that are maintained persistently along with the persistent storage of the object attributes.
- A Printer object can represent either one or more physical output devices or a logical device which
- "processes" jobs but never actually uses a physical output device to put marks on paper. Examples of
- logical devices include a Web page publisher or a gateway into an online document archive or repository.
- A Printer object contains zero or more Job objects.
- A Job object is contained by exactly one Printer object, however the identical document data associated
- with a Job object could be sent to either the same or a different Printer object. In this case, a second Job
- object would be created which would be almost identical to the first Job object, however it would have new
- (different) Job object identifiers (see section 2.4).
- A Job object is either empty (before any documents have been added) or contains one or more documents.
- If the contained document is a stream of document data, that stream can be contained in only one document.
- However, there can be identical copies of the stream in other documents in the same or different Job
- objects. If the contained document is just a reference to a stream of document data, other documents (in the
- same or different Job object(s)) may contain the same reference.

## 2.4 Object Identity

- All Printer and Job objects are identified by a Uniform Resource Identifier (URI) [RFC2396] so that they can be persistently and unambiguously referenced. The notion of a URI is a useful concept, however, until
- the notion of URI is more stable (i.e., defined more completely and deployed more widely), it is expected
- that the URIs used for IPP objects will actually be URLs [RFC2396]. Since every URL is a specialized
- form of a URI, even though the more generic term URI is used throughout the rest of this document, its
- usage is intended to cover the more specific notion of URL as well.
- An administrator configures Printer objects to either support or not support authentication and/or message
- privacy using Transport Layer Security (TLS) [RFC2246] (the mechanism for security configuration is
- outside the scope of this IPP/1.1 document). In some situations, both types of connections (both
- authenticated and unauthenticated) can be established using a single communication channel that has some
- sort of negotiation mechanism. In other situations, multiple communication channels are used, one for each
- type of security configuration. Section 8 provides a full description of all security considerations and
- 621 configurations.
- If a Printer object supports more than one communication channel, some or all of those channels might
- support and/or require different security mechanisms. In such cases, an administrator could expose the
- simultaneous support for these multiple communication channels as multiple URIs for a single Printer
- object where each URI represents one of the communication channels to the Printer object. To support this
- flexibility, the IPP Printer object type defines a multi-valued identification attribute called the "printer-uri-
- supported" attribute. It MUST contain at least one URI. It MAY contain more than one URI. That is,
- every Printer object will have at least one URI that identifies at least one communication channel to the
- Printer object, but it may have more than one URI where each URI identifies a different communication
- channel to the Printer object. The "printer-uri-supported" attribute has two companion attributes, the "uri-
- security-supported" attribute and the "uri-authentication-supported". Both have the same cardinality as
- "printer-uri-supported". The purpose of the "uri-security-supported" attribute is to indicate the security
- mechanisms (if any) used for each URI listed in "printer-uri-supported". The purpose of the "uri-
- authentication-supported" attribute is to indicate the authentication mechanisms (if any) used for each URI
- listed in "printer-uri-supported". These three attributes are fully described in sections 4.4.1, 4.4.2, and
- 636 4.4.3. Issue 2
- When a job is submitted to the Printer object via a create request, the client supplies only a single Printer
- object URI. The client supplied Printer object URI MUST be one of the values in the "printer-uri-
- supported" Printer attribute.
- 640 IPP/1.1 does not specify how the client obtains the client supplied URI, but it is RECOMMENDED that a
- Printer object be registered as an entry in a directory service. End-users and programs can then interrogate
- the directory searching for Printers. Section 16 defines a generic schema for Printer object entries in the
- directory service and describes how the entry acts as a bridge to the actual IPP Printer object. The entry in
- the directory that represents the IPP Printer object includes the possibly many URIs for that Printer object as
- values in one its attributes.
- When a client submits a create request to the Printer object, the Printer object validates the request and
- creates a new Job object. The Printer object assigns the new Job object a URI which is stored in the "job-

- uri" Job attribute. This URI is then used by clients as the target for subsequent Job operations. The Printer object generates a Job URI based on its configured security policy and the URI used by the client in the create request.
- For example, consider a Printer object that supports both a communication channel secured by the use of SSL3 (using HTTP over SSL3 with an "https" schemed URI) and another open communication channel that
- is not secured with SSL3 (using a simple "http" schemed URI). If a client were to submit a job using the
- secure URI, the Printer object would assign the new Job object a secure URI as well. If a client were to
- submit a job using the open-channel URI, the Printer would assign the new Job object an open-channel
- 656 URI.
- In addition, the Printer object also populates the Job object's "job-printer-uri" attribute. This is a reference
- back to the Printer object that created the Job object. If a client only has access to a Job object's "job-uri"
- 659 identifier, the client can guery the Job's "job-printer-uri" attribute in order to determine which Printer object
- created the Job object. If the Printer object supports more than one URI, the Printer object picks the one
- URI supplied by the client when creating the job to build the value for and to populate the Job's "job-
- 662 printer-uri" attribute.
- Allowing Job objects to have URIs allows for flexibility and scalability. For example, in some
- 664 implementations, the Printer object might create Jobs that are processed in the same local environment as
- the Printer object itself. In this case, the Job URI might just be a composition of the Printer's URI and some
- unique component for the Job object, such as the unique 32-bit positive integer mentioned later in this
- paragraph. In other implementations, the Printer object might be a central clearing-house for validating all
- Job object creation requests, but the Job object itself might be created in some environment that is remote
- from the Printer object. In this case, the Job object's URI may have no physical-location relationship at all
- to the Printer object's URI. Again, the fact that Job objects have URIs allows for flexibility and scalability,
- 671 however, many existing printing systems have local models or interface constraints that force print jobs to
- be identified using only a 32-bit positive integer rather than an independent URI. This numeric Job ID is
- only unique within the context of the Printer object to which the create request was originally submitted.
- Therefore, in order to allow both types of client access to IPP Job objects (either by Job URI or by numeric
- Job ID), when the Printer object successfully processes a create request and creates a new Job object, the
- Printer object MUST generate both a Job URI and a Job ID. The Job ID (stored in the "job-id" attribute)
- only has meaning in the context of the Printer object to which the create request was originally submitted.
- This requirement to support both Job URIs and Job IDs allows all types of clients to access Printer objects
- and Job objects no matter the local constraints imposed on the client implementation.
- In addition to identifiers, Printer objects and Job objects have names ("printer-name" and "job-name"). An
- object name NEED NOT be unique across all instances of all objects. A Printer object's name is chosen and
- set by an administrator through some mechanism outside the scope of this IPP/1.1 document. A Job
- object's name is optionally chosen and supplied by the IPP client submitting the job. If the client does not
- supply a Job object name, the Printer object generates a name for the new Job object. In all cases, the name
- only has local meaning.

#### To summarize:

686

687

688

- Each Printer object is identified with one or more URIs. The Printer's "printer-uri-supported" attribute contains the URI(s).

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

- The Printer object's "uri-security-supported" attribute identifies the communication channel security protocols that may or may not have been configured for the various Printer object URIs (e.g., 'tls' or 'none').
- The Printer object's "uri-authentication-supported" attribute identifies the authentication mechanisms that may or may not have been configured for the various Printer object URIs (e.g., 'digest' or 'none').
- Each Job object is identified with a Job URI. The Job's "job-uri" attribute contains the URI.
- Each Job object is also identified with Job ID which is a 32-bit, positive integer. The Job's "job-id" attribute contains the Job ID. The Job ID is only unique within the context of the Printer object which created the Job object.
- Each Job object has a "job-printer-uri" attribute which contains the URI of the Printer object that was used to create the Job object. This attribute is used to determine the Printer object that created a Job object when given only the URI for the Job object. This linkage is necessary to determine the languages, charsets, and operations which are supported on that Job (the basis for such support comes from the creating Printer object).
- Each Printer object has a name (which is not necessarily unique). The administrator chooses and sets this name through some mechanism outside the scope of this IPP/1.1 document. The Printer object's "printer-name" attribute contains the name.
- Each Job object has a name (which is not necessarily unique). The client optionally supplies this name in the create request. If the client does not supply this name, the Printer object generates a name for the Job object. The Job object's "job-name" attribute contains the name.

## 3. IPP Operations

- 711 IPP objects support operations. An operation consists of a request and a response. When a client
- communicates with an IPP object, the client issues an operation request to the URI for that object.
- Operation requests and responses have parameters that identify the operation. Operations also have
- attributes that affect the run-time characteristics of the operation (the intended target, localization
- 715 information, etc.). These operation-specific attributes are called operation attributes (as compared to object
- attributes such as Printer object attributes or Job object attributes). Each request carries along with it any
- authorics such as I fine to object authorics of 500 object authorics). Each request carries along with a
- operation attributes, object attributes, and/or document data required to perform the operation. Each
- request requires a response from the object. Each response indicates success or failure of the operation with
- a status code as a response parameter. The response contains any operation attributes, object attributes,
- and/or status messages generated during the execution of the operation request.
- This section describes the semantics of the IPP operations, both requests and responses, in terms of the parameters, attributes, and other data associated with each operation.
- 723 The IPP/1.1 Printer operations are:
- Print-Job (section 3.2.1)
- Print-URI (section 3.2.2)
- 726 Validate-Job (section 3.2.3)
- 727 Create-Job (section 3.2.4)
- Get-Printer-Attributes (section 3.2.5)

```
Get-Jobs (section 3.2.6)
729
          Pause-Printer (section 3.3.5)
730
          Resume-Printer (section 3.3.6)
731
          Purge-Jobs (section 3.3.7)
732
733
      The Job operations are:
734
          Send-Document (section 3.3.1)
735
          Send-URI (section 3.3.2)
736
          Cancel-Job (section 3.3.3)
737
          Get-Job-Attributes (section 3.3.4)
738
          Hold-Job (section 3.3.5)
739
          Release-Job (section 3.3.6)
740
          Restart-Job (section 3.3.7)
741
742
```

The Send-Document and Send-URI Job operations are used to add a new document to an existing multidocument Job object created using the Create-Job operation.

#### 745 3.1 Common Semantics

All IPP operations require some common parameters and operation attributes. These common elements and their semantic characteristics are defined and described in more detail in the following sections.

#### 3.1.1 Required Parameters

Every operation request contains the following REQUIRED parameters:

```
- a "version-number",- an "operation-id",- a "request-id", and
```

- the attributes that are REQUIRED for that type of request.

755

753 754

748

Every operation response contains the following REQUIRED parameters:

```
- a "version-number",
- a "status-code",
- the "request-id" that
```

- the "request-id" that was supplied in the corresponding request, and

- the attributes that are REQUIRED for that type of response.

759 760 761

762

763

The "Encoding and Transport document [IPP-PRO] defines special rules for the encoding of these parameters. All other operation elements are represented using the more generic encoding rules for attributes and groups of attributes.

## 3.1.2 Operation IDs and Request IDs

- Each IPP operation request includes an identifying "operation-id" value. Valid values are defined in the "operations-supported" Printer attribute section (see section 4.4.15). The client specifies which operation is being requested by supplying the correct "operation-id" value.
- In addition, every invocation of an operation is identified by a "request-id" value. For each request, the client chooses the "request-id" which MUST be an integer (possibly unique depending on client requirements) in the range from 1 to 2\*\*31 1 (inclusive). This "request-id" allows clients to manage multiple outstanding requests. The receiving IPP object copies all 32-bits of the client-supplied "request-id" attribute into the response so that the client can match the response with the correct outstanding request, even if the "request-id" is out of range. If the request is terminated before the complete "request-id" is received, the IPP object rejects the request and returns a response with a "request-id" of 0.
- Note: In some cases, the transport protocol underneath IPP might be a connection oriented protocol that would make it impossible for a client to receive responses in any order other than the order in which the corresponding requests were sent. In such cases, the "request-id" attribute would not be essential for correct protocol operation. However, in other mappings, the operation responses can come back in any order. In these cases, the "request-id" would be essential.

#### 3.1.3 Attributes

Operation requests and responses are both composed of groups of attributes and/or document data. The attributes groups are:

- Operation Attributes: These attributes are passed in the operation and affect the IPP object's behavior while processing the operation request and may affect other attributes or groups of attributes. Some operation attributes describe the document data associated with the print job and are associated with new Job objects, however most operation attributes do not persist beyond the life of the operation. The description of each operation attribute includes conformance statements indicating which operation attributes are REQUIRED and which are OPTIONAL for an IPP object to support and which attributes a client MUST supply in a request and an IPP object MUST supply in a response.
- Job Template Attributes: These attributes affect the processing of a job. A client OPTIONALLY supplies Job Template Attributes in a create request, and the receiving object MUST be prepared to receive all supported attributes. The Job object can later be queried to find out what Job Template attributes were originally requested in the create request, and such attributes are returned in the response as Job Object Attributes. The Printer object can be queried about its Job Template attributes to find out what type of job processing capabilities are supported and/or what the default job processing behaviors are, though such attributes are returned in the response as Printer Object Attributes. The "ipp-attribute-fidelity" operation attribute affects processing of all client-supplied Job Template attributes (see sections 3.2.1.2 and 15 for a full description of "ipp-attribute-fidelity" and its relationship to other attributes).
- Job Object Attributes: These attributes are returned in response to a query operation directed at a Job object.
- Printer Object Attributes: These attributes are returned in response to a query operation directed at a Printer object.

- Unsupported Attributes: In a create request, the client supplies a set of Operation and Job Template attributes. If any of these attributes or their values is unsupported by the Printer object, the Printer object returns the set of unsupported attributes in the response. Sections 3.1.7, 3.2.1.2, and 15 give a full description of how Job Template attributes supplied by the client in a create request are processed by the Printer object and how unsupported attributes are returned to the client. Because of extensibility, any IPP object might receive a request that contains new or unknown attributes or values for which it has no support. In such cases, the IPP object processes what it can and returns the unsupported attributes in the response. The Unsupported Attribute group is defined for all operation responses for returning unsupported attributes that the client supplied in the request.

Later in this section, each operation is formally defined by identifying the allowed and expected groups of attributes for each request and response. The model identifies a specific order for each group in each request or response, but the attributes within each group may be in any order, unless specified otherwise.

Each attribute definition includes the attribute's name followed by the name of its attribute syntax(es) in parenthesizes. In addition, each 'integer' attribute is followed by the allowed range in parentheses, (m:n), for values of that attribute. Each 'text' or 'name' attribute is followed by the maximum size in octets in parentheses, (size), for values of that attribute. For more details on attribute syntax notation, see the descriptions of these attributes syntaxes in section 4.1.

Note: Document data included in the operation is not strictly an attribute, but it is treated as a special attribute group for ordering purposes. The only operations that support supplying the document data within an operation request are Print-Job and Send-Document. There are no operation responses that include document data.

Some operations are REQUIRED for IPP objects to support; the others are OPTIONAL (see section 5.2.2).
Therefore, before using an OPTIONAL operation, a client SHOULD first use the REQUIRED Get-PrinterAttributes operation to query the Printer's "operations-supported" attribute in order to determine which
OPTIONAL Printer and Job operations are actually supported. The client SHOULD NOT use an
OPTIONAL operation that is not supported. When an IPP object receives a request to perform an operation
it does not support, it returns the 'server-error-operation-not-supported' status code (see section 13.1.5.2).
An IPP object is non-conformant if it does not support a REOUIRED operation.

#### 3.1.4 Character Set and Natural Language Operation Attributes

Some Job and Printer attributes have values that are text strings and names intended for human understanding rather than machine understanding (see the 'text' and 'name' attribute syntax descriptions in section 4.1). The following sections describe two special Operation Attributes called "attributes-charset" and "attributes-natural-language". These attributes are always part of the Operation Attributes group. For most attribute groups, the order of the attributes within the group is not important. However, for these two attributes within the Operation Attributes group, the order is critical. The "attributes-charset" attribute MUST be the first attribute in the group and the "attributes-natural-language" attribute MUST be the second attribute in the group. In other words, these attributes MUST be supplied in every IPP request and response, they MUST come first in the group, and MUST come in the specified order. For job creation operations, the IPP Printer implementation saves these two attributes with the new Job object as Job

Description attributes. For the sake of brevity in this document, these operation attribute descriptions are not repeated with every operation request and response, but have a reference back to this section instead.

#### 3.1.4.1 Request Operation Attributes

The client MUST supply and the Printer object MUST support the following REQUIRED operation attributes in every IPP/1.1 operation request:

"attributes-charset" (charset):

This operation attribute identifies the charset (coded character set and encoding method) used by any 'text' and 'name' attributes that the client is supplying in this request. It also identifies the charset that the Printer object MUST use (if supported) for all 'text' and 'name' attributes and status messages that the Printer object returns in the response to this request. See Sections 4.1.1 and 4.1.2 for the definition of the 'text' and 'name' attribute syntaxes.

All clients and IPP objects MUST support the 'utf-8' charset [RFC2279] and MAY support additional charsets provided that they are registered with IANA [IANA-CS]. If the Printer object does not support the client supplied charset value, the Printer object MUST reject the request, set the "attributes-charset" to 'utf-8' in the response, and return the 'client-error-charset-not-supported' status code and any 'text' or 'name' attributes using the 'utf-8' charset. The Printer NEED NOT return any attributes in the Unsupported Attributes Group (See sections 3.1.7 and 3.2.1.2). The Printer object MUST indicate the charset(s) supported as the values of the "charset-supported" Printer attribute (see Section 4.4.18), so that the client can query to determine which charset(s) are supported.

Note to client implementers: Since IPP objects are only required to support the 'utf-8' charset, in order to maximize interoperability with multiple IPP object implementations, a client may want to supply 'utf-8' in the "attributes-charset" operation attribute, even though the client is only passing and able to present a simpler charset, such as US-ASCII or ISO-8859-1. Then the client will have to filter out (or charset convert) those characters that are returned in the response that it cannot present to its user. On the other hand, if both the client and the IPP objects also support a charset in common besides utf-8, the client may want to use that charset in order to avoid charset conversion or data loss.

See the 'charset' attribute syntax description in Section 4.1.7 for the syntax and semantic interpretation of the values of this attribute and for example values.

"attributes-natural-language" (naturalLanguage):

This operation attribute identifies the natural language used by any 'text' and 'name' attributes that the client is supplying in this request. This attribute also identifies the natural language that the Printer object SHOULD use for all 'text' and 'name' attributes and status messages that the Printer object returns in the response to this request.

There are no REQUIRED natural languages required for the Printer object to support. However, the Printer object's "generated-natural-language-supported" attribute identifies the natural languages supported by the Printer object and any contained Job objects for all text strings generated by the

IPP object. A client MAY query this attribute to determine which natural language(s) are supported for generated messages.

For any of the attributes for which the Printer object generates text, i.e., for the "job-state-message", "printer-state-message", and status messages (see Section 3.1.6), the Printer object MUST be able to generate these text strings in any of its supported natural languages. If the client requests a natural language that is not supported, the Printer object MUST return these generated messages in the Printer's configured natural language as specified by the Printer's "natural-language-configured" attribute" (see Section 4.4.19).

For other 'text' and 'name' attributes supplied by the client, authentication system, operator, system administrator, or manufacturer (i.e., for "job-originating-user-name", "printer-name" (name), "printer-location" (text), "printer-info" (text), and "printer-make-and-model" (text)), the Printer object is only required to support the configured natural language of the Printer identified by the Printer object's "natural-language-configured" attribute, though support of additional natural languages for these attributes is permitted.

For any 'text' or 'name' attribute in the request that is in a different natural language than the value supplied in the "attributes-natural-language" operation attribute, the client MUST use the Natural Language Override mechanism (see sections 4.1.1.2 and 4.1.2.2) for each such attribute value supplied. The client MAY use the Natural Language Override mechanism redundantly, i.e., use it even when the value is in the same natural language as the value supplied in the "attributes-natural-language" operation attribute of the request.

The IPP object MUST accept any natural language and any Natural Language Override, whether the IPP object supports that natural language or not (and independent of the value of the "ipp-attribute-fidelity" Operation attribute). That is the IPP object accepts all client supplied values no matter what the values are in the Printer object's "generated-natural-language-supported" attribute. That attribute, "generated-natural-language-supported", only applies to generated messages, not client supplied messages. The IPP object MUST remember that natural language for all client-supplied attributes, and when returning those attributes in response to a query, the IPP object MUST indicate that natural language.

Each value whose attribute syntax type is 'text' or 'name' (see sections 4.1.1 and 4.1.2) has an Associated Natural-Language. This document does not specify how this association is stored in a Printer or Job object. When such a value is encoded in a request or response, the natural language is either implicit or explicit:

- In the implicit case, the value contains only the text/name value, and the language is specified by the "attributes-natural-language" operation attribute in the request or response (see sections 4.1.1.1 textWithoutLanguage and 4.1.2.1 nameWithoutLanguage).
- In the explicit case (also known as the Natural-Language Override case), the value contains both the language and the text/name value (see sections 4.1.1.2 textWithLanguage and 4.1.2.2 nameWithLanguage).

deBry, Hastings, Herriot, Isaacson, Powell

For example, the "job-name" attribute MAY be supplied by the client in a create request. The text value for this attribute will be in the natural language identified by the "attribute-natural-language" attribute, or if different, as identified by the Natural Language Override mechanism. If supplied, the IPP object will use the value of the "job-name" attribute to populate the Job object's "job-name" attribute. Whenever any client queries the Job object's "job-name" attribute, the IPP object returns the attribute as stored and uses the Natural Language Override mechanism to specify the natural language, if it is different from that reported in the "attributes-natural-language" operation attribute of the response. The IPP object MAY use the Natural Language Override mechanism redundantly, i.e., use it even when the value is in the same natural language as the value supplied in the "attributes-natural-language" operation attribute of the response.

An IPP object MUST NOT reject a request based on a supplied natural language in an "attributes-natural-language" Operation attribute or in any attribute that uses the Natural Language Override.

See the 'naturalLanguage' attribute syntax description in section 4.1.8 for the syntax and semantic interpretation of the values of this attribute and for example values.

Clients SHOULD NOT supply 'text' or 'name' attributes that use an illegal combination of natural language and charset. For example, suppose a Printer object supports charsets 'utf-8', 'iso-8859-1', and 'iso-8859-7'. Suppose also, that it supports natural languages 'en' (English), 'fr' (French), and 'el' (Greek). Although the Printer object supports the charset 'iso-8859-1' and natural language 'el', it probably does not support the combination of Greek text strings using the 'iso-8859-1' charset. The Printer object handles this apparent incompatibility differently depending on the context in which it occurs:

- In a create request: If the client supplies a text or name attribute (for example, the "job-name" operation attribute) that uses an apparently incompatible combination, it is a client choice that does not affect the Printer object or its correct operation. Therefore, the Printer object simply accepts the client supplied value, stores it with the Job object, and responds back with the same combination whenever the client (or any client) queries for that attribute.

-In a query-type operation, like Get-Printer-Attributes: If the client requests an apparently incompatible combination, the Printer object responds (as described in section 3.1.4.2) using the Printer's configured natural language rather than the natural language requested by the client.

In either case, the Printer object does not reject the request because of the apparent incompatibility. The potential incompatible combination of charset and natural language can occur either at the global operation level or at the Natural Language Override attribute-by-attribute level. In addition, since the response always includes explicit charset and natural language information, there is never any question or ambiguity in how the client interprets the response.

#### 3.1.4.2 Response Operation Attributes

 The Printer object MUST supply and the client MUST support the following REQUIRED operation attributes in every IPP/1.1 operation response:

"attributes-charset" (charset):

This operation attribute identifies the charset used by any 'text' and 'name' attributes that the Printer object is returning in this response. The value in this response MUST be the same value as the "attributes-charset" operation attribute supplied by the client in the request. If this is not possible (i.e., the charset requested is not supported), the request would have been rejected. See "attributes-charset" described in Section 3.1.4.1 above.

If the Printer object supports more than just the 'utf-8' charset, the Printer object MUST be able to code convert between each of the charsets supported on a highest fidelity possible basis in order to return the 'text' and 'name' attributes in the charset requested by the client. However, some information loss MAY occur during the charset conversion depending on the charsets involved. For example, the Printer object may convert from a UTF-8 'a' to a US-ASCII 'a' (with no loss of information), from an ISO Latin 1 CAPITAL LETTER A WITH ACUTE ACCENT to US-ASCII 'A' (losing the accent), or from a UTF-8 Japanese Kanji character to some ISO Latin 1 error character indication such as '?', decimal code equivalent, or to the absence of a character, depending on implementation.

Whether an implementation that supports more than one charset stores the data in the charset supplied by the client or code converts to one of the other supported charsets, depends on implementation. The strategy should try to minimize loss of information during code conversion. On each response, such an implementation converts from its internal charset to that requested.

"attributes-natural-language" (naturalLanguage):

This operation attribute identifies the natural language used by any 'text' and 'name' attributes that the IPP object is returning in this response. Unlike the "attributes-charset" operation attribute, the IPP object NEED NOT return the same value as that supplied by the client in the request. The IPP object MAY return the natural language of the Job object or the Printer's configured natural language as identified by the Printer object's "natural-language-configured" attribute, rather than the natural language supplied by the client. For any 'text' or 'name' attribute or status message in the response that is in a different natural language than the value returned in the "attributes-natural-language" operation attribute, the IPP object MUST use the Natural Language Override mechanism (see sections 4.1.1.2 and 4.1.2.2) on each attribute value returned. The IPP object MAY use the Natural Language Override mechanism redundantly, i.e., use it even when the value is in the same natural language as the value supplied in the "attributes-natural-language" operation attribute of the response.

#### 3.1.5 Operation Targets

All IPP operations are directed at IPP objects. For Printer operations, the operation is always directed at a Printer object using one of its URIs (i.e., one of the values in the Printer object's "printer-uri-supported" attribute). Even if the Printer object supports more than one URI, the client supplies only one URI as the target of the operation. The client identifies the target object by supplying the correct URI in the "printer-uri (uri)" operation attribute.

For Job operations, the operation is directed at either:

- The Job object itself using the Job object's URI. In this case, the client identifies the target object by supplying the correct URI in the "job-uri (uri)" operation attribute.
- The Printer object that created the Job object using both the Printer objects URI and the Job object's Job ID. Since the Printer object that created the Job object generated the Job ID, it MUST be able to correctly associate the client supplied Job ID with the correct Job object. The client supplies the Printer object's URI in the "printer-uri (uri)" operation attribute and the Job object's Job ID in the "job-id (integer(1:MAX))" operation attribute.

If the operation is directed at the Job object directly using the Job object's URI, the client MUST NOT include the redundant "job-id" operation attribute.

The operation target attributes are REQUIRED operation attributes that MUST be included in every operation request. Like the charset and natural language attributes (see section 3.1.4), the operation target attributes are specially ordered operation attributes. In all cases, the operation target attributes immediately follow the "attributes-charset" and "attributes-natural-language" attributes within the operation attribute group, however the specific ordering rules are:

 - In the case where there is only one operation target attribute (i.e., either only the "printer-uri" attribute or only the "job-uri" attribute), that attribute MUST be the third attribute in the operation attributes group.

- In the case where Job operations use two operation target attributes (i.e., the "printer-uri" and "job-id" attributes), the "printer-uri" attribute MUST be the third attribute and the "job-id" attribute MUST be the fourth attribute.

In all cases, the target URIs contained within the body of IPP operation requests and responses must be in absolute format rather than relative format (a relative URL identifies a resource with the scope of the HTTP server, but does not include scheme, host or port).

The following rules apply to the use of port numbers in URIs that identify IPP objects:

1. If the URI scheme allows the port number to be explicitly included in the URI string, and a port number is specified within the URI, then that port number MUST be used by the client to contact the IPP object.

2. If the URI scheme allows the port number to be explicitly included in the URI string, and a port number is not specified within the URI, then default port number implied by that URI scheme MUST be used by the client to contact the IPP object.

3. If the URI scheme does not allow an explicit port number to be specified within the URI, then the default port number implied by that URI MUST be used by the client to contact the IPP object.

Note: The IPP "Encoding and Transport document [IPP-PRO] shows a mapping of IPP onto HTTP/1.1 and defines a new default port number for using IPP over HTTP/1.1.

- 3.1.6 Operation Response Status Codes and Status Messages
- Every operation response includes a REQUIRED "status-code" parameter and an OPTIONAL "status-
- message" operation attribute, and an OPTIONAL "detailed-status-message" operation attribute. The Print-
- 1057 URI and Send-URI response MAY include an OPTIONAL "document-access-error" operation attribute.
- 1058 3.1.6.1 "status-code" (type2 enum)
- The REQUIRED "status-code" parameter provides information on the processing of a request.
- The status code is intended for use by automata. A client implementation of IPP SHOULD convert status code values into any localized message that has semantic meaning to the end user.
- The "status-code" value is a numeric value that has semantic meaning. The "status-code" syntax is similar
- to a "type2 enum" (see section 4.1 on "Attribute Syntaxes") except that values can range only from 0x0000
- to 0x7FFF. Section 13 describes the status codes, assigns the numeric values, and suggests a corresponding
- status message for each status code for use by the client when the user's natural language is English.
- If the Printer performs an operation with no errors and it encounters no problems, it MUST return the status code 'successful-ok' in the response. See section 13.
- If the client supplies unsupported values for the following parameters or Operation attributes, the Printer object MUST reject the operation, NEED NOT return the unsupported attribute value in the Unsupported Attributes group, and MUST return the indicated status code:

Parameter/Attribute	Status code
version-number	server-error-version-not-supported
operation-id	server-error-operation-not-supported
attributes-charset	client-error-charset-not-supported
compression	client-error-compression-not-supported
document-format	client-error-document-format-not-supported
document-uri	client-error-uri-scheme-not-supported, client-error-document-
	access-error

1072

- If the client supplies unsupported values for other attributes, or unsupported attributes, the Printer returns the status code defined in section 3.1.7 on Unsupported Attributes. Issue 18
- 1074 3.1.6.2 "status-message" (text(255))
- The OPTIONAL "status-message" operation attribute provides a short textual description of the status of the operation. The "status-message" attribute's syntax is "text(255)", so the maximum length is 255 octets (see section 4.1.1). The status message is intended for the human end user. If a response does include a "status-message" attribute, an IPP client NEED NOT examine or display the messages, however it SHOULD do so in some implementation specific manner. The "status-message" is especially useful for a later version of a Printer object to return as supplemental information for the human user to accompany a status code that an earlier version of a client might not understand.

- If the Printer object supports the "status-message" operation attribute, the Printer object MUST be able to generate this message in any of the natural languages identified by the Printer object's "generated-natural-language-supported" attribute (see the "attributes-natural-language" operation attribute specified in section 3.1.4.1. Section 13 suggests the text for the status message returned by the Printer for use with the English natural language.
- As described in section 3.1.4.1 for any returned 'text' attribute, if there is a choice for generating this message, the Printer object uses the natural language indicated by the value of the "attributes-natural-language" in the client request if supported, otherwise the Printer object uses the value in the Printer object's own "natural-language-configured" attribute.
- If the Printer object supports the "status-message" operation attribute, it SHOULD use the REQUIRED 'utf-8' charset to return a status message for the following error status codes (see section 13): 'client-error-bad-request', 'client-error-charset-not-supported', 'server-error-internal-error', 'server-error-operation-not-supported', and 'server-error-version-not-supported'. In this case, it MUST set the value of the "attributes-charset" operation attribute to 'utf-8' in the error response.
- 1096 3.1.6.3 "detailed-status-message" (text(MAX)) Issue 35
- The OPTIONAL "detailed-status-message" operation attribute provides additional more detailed technical and implementation-specific information about the operation. The "detailed-status-message" attribute's syntax is "text(MAX)", so the maximum length is 1023 octets (see section 4.1.1). If the Printer objects supports the "detailed-status-message" operation attribute, neither the Printer nor the client localizes the message, since it is intended for use by the system administrator or other experienced technical persons.

  Clients MUST NOT attempt to parse the value of this attribute. See the "document-access-error" operation attribute (section 3.1.6.4) for additional errors that a program can process.
- 3.1.6.4 "document-access-error" (text(MAX)) Issue 35
- This OPTIONAL operation attribute provides additional information about any document access errors encountered by the Printer before it returned a response to the Print-URI (section 3.2.2) or Send-URI (section 3.3.1) operation. For errors in the protocol identified by the URI scheme in the "document-uri" operation attribute, such as 'http:' or 'ftp:', the error code is returned in parentheses, followed by the URI. For example:
- 1110 (404) http://ftp.pwq.org/pub/pwq/ipp/new MOD/ipp-model-v11-990510.pdf
- Most Internet protocols use decimal error codes (unlike IPP), so the ASCII error code representation is in decimal.
- 1114 3.1.7 Unsupported Attributes

The Unsupported Attributes group contains attributes that are not supported by the operation. This group is primarily for the job creation operations, but all operations can return this group.

- A Printer object MUST include an Unsupported Attributes group in a response if the status code is one of the following: 'successful-ok-ignored-or-substituted-attributes', 'successful-ok-conflicting-attributes', 'client-
- error-attributes-or-values-not-supported or 'client-error-conflicting-attributes'.
- 1120 If the status code is one of the four specified in the preceding paragraph, the Unsupported Attributes group
- MUST contain all of those attributes and only those attributes that are:
- a. an Operation or Job Template attribute supplied in the request, and
- b. unsupported by the printer. See below for details on the three categories "unsupported" attributes.

  Issue 18, Issue 23, and Issue 27
- 1125 If the Printer object is not returning any Unsupported Attributes in the response, the Printer object
- SHOULD omit Group 2 rather than sending an empty group. However, a client MUST be able to accept an
- empty group.

1135

- Unsupported attributes fall into three categories:
- 1. The Printer object does not support the supplied attribute (no matter what the attribute syntax or value).
- The Printer object does support the attribute, but does not support some or all of the particular attribute syntaxes or values supplied by the client (i.e., the Printer object does not have those attribute syntaxes or values in its corresponding "xxx-supported" attribute).
  - 3. The Printer object does support the attributes and values supplied, but the particular values are in conflict with one another, because they violate a constraint, such as not being able to staple transparencies.
- In the case of an unsupported attribute name, the Printer object returns the client-supplied attribute with a substituted value of 'unsupported'. This value's syntax type is "out-of-band" and its encoding is defined by
- special rules for "out-of-band" values in the "Encoding and Transport" document [IPP-PRO]. Its value
- indicates no support for the attribute itself (see the beginning of section 4.1). Issue 12
- In the case of a supported attribute with one or more unsupported attribute syntaxes or values, the Printer
- object simply returns the client-supplied attribute with the unsupported attribute syntaxes or values as
- supplied by the client. This indicates support for the attribute, but no support for that particular attribute
- syntax or value. If the client supplies a multi-valued attribute with more than one value and the Printer
- object supports the attribute but only supports a subset of the client-supplied attribute syntaxes or values,
- the Printer object MUST return only those attribute syntaxes or values that are unsupported.
- In the case of two (or more) supported attribute values that are in conflict with one another (although each
- is supported independently, the values conflict when requested together within the same job), the Printer
- object MUST return all the values that it ignores or substitutes to resolve the conflict, but not any of the
- values that it is still using. The choice for exactly how to resolve the conflict is implementation dependent.
- See sections 3.2.1.2 and 15. See The Implementer's Guide [IPP-IIG] for an example.

#### 1152 3.1.8 Versions

- Each operation request and response carries with it a "version-number" parameter. Each value of the
- "version-number" is in the form "X.Y" where X is the major version number and Y is the minor version
- number. By including a version number in the client request, it allows the client to identify which version
- of IPP it is interested in using, i.e., the version whose conformance requirements the client may be
- depending upon the Printer to meet.
- 1158 If the IPP object does not support that major version number supplied by the client, i.e., the major version
- field of the "version-number" parameter does not match any of the values of the Printer's "ipp-versions-
- supported" (see section 4.4.14), the object MUST respond with a status code of 'server-error-version-not-
- supported' along with the closest version number that is supported (see section 13.1.5.4). If the major
- version number is supported, but the minor version number is not, the IPP object SHOULD accept and
- attempt to perform the request (or reject the request if the operation is not supported), else it rejects the
- request and returns the 'server-error-version-not-supported' status code. In all cases, the IPP object MUST
- return the "version-number" that it supports that is closest to the version number supplied by the client in
- the request.

1188

1189

- There is no version negotiation per se. However, if after receiving a 'server-error-version-not-supported'
- status code from an IPP object, a client SHOULD try again with a different version number. A client MAY
- also determine the versions supported either from a directory that conforms to Appendix E (see section 16)
- or by querying the Printer object's "ipp-versions-supported" attribute (see section 4.4.14) to determine
- which versions are supported. Issue 36
- An IPP object implementation MUST support version '1.1', i.e., meet the conformance requirements for
- 1173 IPP/1.1 as specified in this document and [IPP-PRO]. An IPP object implementation SHOULD support
- version '1.0', i.e., meet the conformance requirements for IPP/1.0 [RFC2566 and RFC2565]. Issue 36
- There is only one notion of "version number" that covers both IPP Model and IPP Protocol changes. Thus
- the version number MUST change when introducing a new version of the Model and Semantics document
- (this document) or a new version of the "Encoding and Transport" document [IPP-PRO].
- 1178 Changes to the major version number of the Model and Semantics document indicate structural or syntactic
- changes that make it impossible for older version of IPP clients and Printer objects to correctly parse and
- 1180 correctly process the new or changed attributes, operations and responses. If the major version number
- changes, the minor version numbers is set to zero. As an example, adding the REQUIRED "ipp-attribute-
- fidelity" attribute to version '1.1' (if it had not been part of version '1.0'), would have required a change to
- the major version number, since an IPP/1.0 Printer would not have processed a request with the correct
- semantics that contained the "ipp-attribute-fidelity" attribute that it did not know about. Items that might
- affect the changing of the major version number include any changes to the Model and Semantics document
- (this document) or the "Encoding and Transport" document [IPP-PRO] itself, such as:
- reordering of ordered attributes or attribute sets
  - changes to the syntax of existing attributes
  - adding REQUIRED (for an IPP object to support) operation attribute groups
- adding values to existing REQUIRED operation attributes
  - adding REQUIRED operations

1198

1199

1200

1201

1202

1203

1204

1205

1206

1207

1208

1209

- Changes to the minor version number indicate the addition of new features, attributes and attribute values that may not be understood by all IPP objects, but which can be ignored if not understood. Items that might affect the changing of the minor version number include any changes to the model objects and attributes but not the encoding and transport rules [IPP-PRO] (except adding attribute syntaxes). Examples of such changes are:
  - grouping all extensions not included in a previous version into a new version
  - adding new attribute values
  - adding new object attributes
  - adding OPTIONAL (for an IPP object to support) operation attributes (i.e., those attributes that an IPP object can ignore without confusing clients)
    - adding OPTIONAL (for an IPP object to support) operation attribute groups (i.e., those attributes that an IPP object can ignore without confusing clients)
    - adding new attribute syntaxes
    - adding OPTIONAL operations
    - changing Job Description attributes or Printer Description attributes from OPTIONAL to REQUIRED or vice versa.
    - adding OPTIONAL attribute syntaxes to an existing attribute. Issue 33
- The encoding of the "version-number" MUST NOT change over any version number (either major or minor). This rule guarantees that all future versions will be backwards compatible with all previous
- versions (at least for checking the "version-number"). In addition, any protocol elements (attributes, error
- codes, tags, etc.) that are not carried forward from one version to the next are deprecated so that they can
- never be reused with new semantics.
- 1215 Implementations that support a certain version NEED NOT support ALL previous versions. As each new
- version is defined (through the release of a new IPP specification document), that version will specify
- which previous versions MUST and which versions SHOULD be supported in compliant implementations.
- 1218 **Issue 36**

#### 3.1.9 Job Creation Operations

- In order to "submit a print job" and create a new Job object, a client issues a create request. A create request is any one of following three operation requests:
  - The Print-Job Request: A client that wants to submit a print job with only a single document uses the Print-Job operation. The operation allows for the client to "push" the document data to the Printer object by including the document data in the request itself.
  - The Print-URI Request: A client that wants to submit a print job with only a single document (where the Printer object "pulls" the document data instead of the client "pushing" the data to the Printer object) uses the Print-URI operation. In this case, the client includes in the request only a URI reference to the document data (not the document data itself).
  - The Create-Job Request: A client that wants to submit a print job with multiple documents uses the Create-Job operation. This operation is followed by an arbitrary number of Send-Document and/or

122912301231

1232

1220

1221

1222

1223

1224 1225

1226

1227

1228

deBry, Hastings, Herriot, Isaacson, Powell

Send-URI operations (each creating another document for the newly create Job object). The Send-Document operation includes the document data in the request (the client "pushes" the document data to the printer), and the Send-URI operation includes only a URI reference to the document data in the request (the Printer "pulls" the document data from the referenced location). The last Send-Document or Send-URI request for a given Job object includes a "last-document" operation attribute set to 'true' indicating that this is the last request.

12381239

1240

1241

1233

1234

1235

1236

1237

- Throughout this model document, the term "create request" is used to refer to any of these three operation requests.
- A Create-Job operation followed by only one Send-Document operation is semantically equivalent to a Print-Job operation, however, for performance reasons, the client SHOULD use the Print-Job operation for all single document jobs. Also, Print-Job is a REQUIRED operation (all implementations MUST support it) whereas Create-Job is an OPTIONAL operation, hence some implementations might not support it.
- Job submission time is the point in time when a client issues a create request. The initial state of every Job object is the 'pending', 'pending-held', or 'processing' state (see section 4.3.7). Issue 13 When the Printer object begins processing the print job, the Job object's state moves to 'processing'. This is known as job processing time. There are validation checks that must be done at job submission time and others that must be performed at job processing time.
- At job submission time and at the time a Validate-Job operation is received, the Printer MUST do the following:
  - 1. Process the client supplied attributes and either accept or reject the request
  - 2. Validate the syntax of and support for the scheme of any client supplied URI

12541255

1256

1257

1258

1259

1253

- At job submission time the Printer object MUST validate whether or not the supplied attributes, attribute syntaxes, and values are supported by matching them with the Printer object's corresponding "xxx-supported" attributes. See section 3.1.7 for details. [IPP-IIG] presents suggested steps for an IPP object to either accept or reject any request and additional steps for processing create requests.
- At job submission time the Printer object NEED NOT perform the validation checks reserved for job processing time such as:
  - 1. Validating the document data
  - 2. Validating the actual contents of any client supplied URI (resolve the reference and follow the link to the document data)

126412651266

1267

1268

1269

1270

1271

1262

1263

At job submission time, these additional job processing time validation checks are essentially useless, since they require actually parsing and interpreting the document data, are not guaranteed to be 100% accurate, and MUST be done, yet again, at job processing time. Also, in the case of a URI, checking for availability at job submission time does not guarantee availability at job processing time. In addition, at job processing time, the Printer object might discover any of the following conditions that were not detectable at job submission time:

- runtime errors in the document data.
- nested document data that is in an unsupported format,
- the URI reference is no longer valid (i.e., the server hosting the document might be down), or
- any other job processing error

- At job submission time, a Printer object, especially a non-spooling Printer, MAY accept jobs that it does not have enough space for. In such a situation, a Printer object MAY stop reading data from a client for an
- indefinite period of time. A client MUST be prepared for a write operation to block for an indefinite period
- of time (see section 5.1 on client conformance).
- When a Printer object has too little space for starting a new job, it MAY reject a new create request. In this
- case, a Printer object MUST return a response (in reply to the rejected request) with a status-code of 'server-
- error-busy' (see section 14.1.5.8) and it MAY close the connection before receiving all bytes of the
- operation. A Printer SHOULD indicate that it is temporarily unable to accept jobs by setting the 'spool-
- space-full' value in its "printer-state-reasons" attribute and removing the value when it can accept another
- job (see section 4.4.12).
- When receiving a 'server-error-busy' status-code in an operation response, a client MUST be prepared for
- the Printer object to close the connection before the client has sent all of the data (especially for the Print-
- Job operation). A client MUST be prepared to keep submitting a create request until the IPP Printer object
- accepts the create request. Issue 20
- At job processing time, since the Printer object has already responded with a successful status code in the
- response to the create request, if the Printer object detects an error, the Printer object is unable to inform the
- end user of the error with an operation status code. In this case, the Printer, depending on the error, can set
- the job object's "job-state", "job-state-reasons", or "job-state-message" attributes to the appropriate value(s)
- so that later queries can report the correct job status.
- Note: Asynchronous notification of events is outside the scope of this IPP/1.1 document.

- 1298 3.2 Printer Operations
- All Printer operations are directed at Printer objects. A client MUST always supply the "printer-uri"
- operation attribute in order to identify the correct target of the operation.
- 3.2.1 Print-Job Operation
- This REQUIRED operation allows a client to submit a print job with only one document and supply the
- document data (rather than just a reference to the data). See Section 15 for the suggested steps for
- processing create operations and their Operation and Job Template attributes.

#### 3.2.1.1 Print-Job Request

The following groups of attributes are supplied as part of the Print-Job Request:

#### Group 1: Operation Attributes

#### Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1. The Printer object MUST copy these values to the corresponding Job Description attributes described in sections 4.3.19 and 4.3.20.

#### Target:

The "printer-uri" (uri) operation attribute which is the target for this operation as described in section 3.1.5.

### Requesting User Name:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

## "job-name" (name(MAX)):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It contains the client supplied Job name. If this attribute is supplied by the client, its value is used for the "job-name" attribute of the newly created Job object. The client MAY automatically include any information that will help the end-user distinguish amongst his/her jobs, such as the name of the application program along with information from the document, such as the document name, document subject, or source file name. If this attribute is not supplied by the client, the Printer generates a name to use in the "job-name" attribute of the newly created Job object (see Section 4.3.5).

## "ipp-attribute-fidelity" (boolean):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. The value 'true' indicates that total fidelity to client supplied Job Template attributes and values is required, else the Printer object MUST reject the Print-Job request. The value 'false' indicates that a reasonable attempt to print the Job object is acceptable and the Printer object MUST accept the Print-job request. If not supplied, the Printer object assumes the value is 'false'. All Printer objects MUST support both types of job processing. See section 15 for a full description of "ipp-attribute-fidelity" and its relationship to other attributes, especially the Printer object's "pdl-override-supported" attribute.

#### "document-name" (name(MAX)):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It contains the client supplied document name. The document name MAY be different than the Job name. Typically, the client software automatically supplies the document name on behalf of the end user by using a file name or an application generated name. If this attribute is supplied, its value can be used in a manner defined by each implementation. Examples include: printed along with the Job (job start sheet, page adornments, etc.), used by accounting or resource tracking management tools,

June 11, 1999

or even stored along with the document as a document level attribute. IPP/1.1 does not support the concept of document level attributes.

## 

#### "compression" (type3 keyword)

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute and the "compression-supported" attribute (see section 4.4.32). The client supplied "compression" operation attribute identifies the compression algorithm used on the document data. The following cases exist:

- a) If the client omits this attribute, the Printer object MUST assume that the data is not compressed (i.e. the Printer follows the rules below as if the client supplied the "compression" attribute with a value of 'none').
- b) If the client supplies this attribute, but the value is not supported by the Printer object, i.e., the value is not one of the values of the Printer object's "compression-supported" attribute, the Printer object MUST reject the request, and return the 'client-error-compression-not-supported' status code. See section 3.1.7 for returning unsupported attributes and values.
- c) If the client supplies the attribute and the Printer object supports the attribute value, the Printer object uses the corresponding decompression algorithm on the document data.
- d) If the decompression algorithm fails before the Printer returns an operation response, the Printer object MUST reject the request and return the 'client-error-compression-error' status code.
- e) If the decompression algorithm fails after the Printer returns an operation response, the Printer object MUST abort the job and add the 'compression-error' value to the job's "job-state-reasons" attribute.
- f) If the decompression algorithm succeeds, the document data MUST then have the format specified by the job's "document-format" attribute, if supplied (see "document-format" operation attribute definition below). Issue 28

# 

## "document-format" (mimeMediaType):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. The value of this attribute identifies the format of the supplied document data. The following cases exist:

- a) If the client does not supply this attribute, the Printer object assumes that the document data is in the format defined by the Printer object's "document-format-default" attribute. (i.e. the Printer follows the rules below as if the client supplied the "document-format" attribute with a value equal to the printer's default value).
- b) If the client supplies this attribute, but the value is not supported by the Printer object, i.e., the value is not one of the values of the Printer object's "document-format-supported" attribute, the Printer object MUST reject the request and return the 'client-error-document-format-not-supported' status code.
- c) If the client supplies this attribute and its value is 'application/octet-stream' (i.e. to be auto-sensed, see Section 4.1.9.1), and the format is not one of the document-formats that the Printer can auto-sense, and this check occurs before the Printer returns an operation response, then the Printer MUST reject the request and return the 'client-error-document-format-not-supported' status code.

- d) If the client supplies this attribute, and the value is supported by the Printer object, the document data, the Printer is capable of interpreting the document data.
- e) If interpreting of the document data fails before the Printer returns an operation response, the Printer object MUST reject the request and return the 'client-error-document-format-error' status code.
- f) If interpreting of the document data fails after the Printer returns an operation response, the Printer object MUST abort the job and add the 'document-format-error' value to the job's "job-state-reasons" attribute. Issue 11

# "document-natural-language" (naturalLanguage):

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute. This attribute specifies the natural language of the document for those document-formats that require a specification of the natural language in order to image the document unambiguously. There are no particular values required for the Printer object to support.

# "job-k-octets" (integer(0:MAX))

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute and the "job-k-octets-supported" attribute (see section 4.4.33). The client supplied "job-k-octets" operation attribute identifies the total size of the document(s) in K octets being submitted (see section 4.3.17.1 for the complete semantics). If the client supplies the attribute and the Printer object supports the attribute, the value of the attribute is used to populate the Job object's "job-k-octets" Job Description attribute.

For this attribute and the following two attributes ("job-impressions", and "job-media-sheets"), if the client supplies the attribute, but the Printer object does not support the attribute, the Printer object ignores the client-supplied value. If the client supplies the attribute and the Printer supports the attribute, and the value is within the range of the corresponding Printer object's "xxx-supported" attribute, the Printer object MUST use the value to populate the Job object's "xxx" attribute. If the client supplies the attribute and the Printer supports the attribute, but the value is outside the range of the corresponding Printer object's "xxx-supported" attribute, the Printer object MUST copy the attribute and its value to the Unsupported Attributes response group, reject the request, and return the 'client-error-attributes-or-values-not-supported' status code. If the client does not supply the attribute, the Printer object MAY choose to populate the corresponding Job object attribute depending on whether the Printer object supports the attribute and is able to calculate or discern the correct value.

### "job-impressions" (integer(0:MAX))

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute and the "job-impressions-supported" attribute (see section 4.4.34). The client supplied "job-impressions" operation attribute identifies the total size in number of impressions of the document(s) being submitted (see section 4.3.17.2 for the complete semantics).

See last paragraph under "job-k-octets".

"job-media-sheets" (integer(0:MAX)) 1438

> The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute and the "job-media-sheets-supported" attribute (see section 4.4.35). The client supplied "job-media-sheets" operation attribute identifies the total number of media sheets to be produced for this job (see section 4.3.17.3 for the complete semantics).

1442 1443

1439

1440

1441

See last paragraph under "job-k-octets".

1444 1445 1446

1447

1448

1449

# Group 2: Job Template Attributes

The client OPTIONALLY supplies a set of Job Template attributes as defined in section 4.2. If the client is not supplying any Job Template attributes in the request, the client SHOULD omit Group 2 rather than sending an empty group. However, a Printer object MUST be able to accept an empty group.

1450 1451

1452

### **Group 3: Document Content**

The client MUST supply the document data to be processed.

1453 1454

1455

1456

1457

1458

1459

1460

1461

1462

1463

1464

In addition to the MANDATORY parameters required for every operation request, the simplest Print-Job Request consists of just the "attributes-charset" and "attributes-natural-language" operation attributes; the "printer-uri" target operation attribute; the Document Content and nothing else. In this simple case, the Printer object:

- creates a new Job object (the Job object contains a single document),
  - stores a generated Job name in the "job-name" attribute in the natural language and charset requested (see Section 3.1.4.1) (if those are supported, otherwise using the Printer object's default natural language and charset), and
  - at job processing time, uses its corresponding default value attributes for the supported Job Template attributes that were not supplied by the client as IPP attribute or embedded instructions in the document data.

1465 1466

1467

1472

1473

1474

1475

### 3.2.1.2 Print-Job Response

The Printer object MUST return to the client the following sets of attributes as part of the Print-Job 1468

Response: 1469

#### Group 1: Operation Attributes 1470

Status Message: 1471

> In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text(255)) operation attribute as described in sections 13 and 3.1.6. If the client supplies unsupported or conflicting Job Template attributes or values, the Printer object MUST reject or accept the Print-Job request depending on the whether the client supplied a 'true' or

'false' value for the "ipp-attribute-fidelity" operation attribute. See the Implementer's Guide [IPP-IIG] for a complete description of the suggested steps for processing a create request.

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.

### Group 2: Unsupported Attributes

See section 3.1.7 for details on returning Unsupported Attributes.

The value of the "ipp-attribute-fidelity" supplied by the client does not affect what attributes the Printer object returns in this group. The value of "ipp-attribute-fidelity" only affects whether the Print-Job operation is accepted or rejected. If the job is accepted, the client may query the job using the Get-Job-Attributes operation requesting the unsupported attributes that were returned in the create response to see which attributes were ignored (not stored on the Job object) and which attributes were stored with other (substituted) values.

# Group 3: Job Object Attributes

"job-uri" (uri):

The Printer object MUST return the Job object's URI by returning the contents of the REQUIRED "job-uri" Job object attribute. The client uses the Job object's URI when directing operations at the Job object. The Printer object always uses its configured security policy when creating the new URI. However, if the Printer object supports more than one URI, the Printer object also uses information about which URI was used in the Print-Job Request to generated the new URI so that the new URI references the correct access channel. In other words, if the Print-Job Request comes in over a secure channel, the Printer object MUST generate a Job URI that uses the secure channel as well.

### "job-id" (integer(1:MAX)):

The Printer object MUST return the Job object's Job ID by returning the REQUIRED "job-id" Job object attribute. The client uses this "job-id" attribute in conjunction with the "printer-uri" attribute used in the Print-Job Request when directing Job operations at the Printer object.

### "job-state":

The Printer object MUST return the Job object's REQUIRED "job-state" attribute. The value of this attribute (along with the value of the next attribute: "job-state-reasons") is taken from a "snapshot" of the new Job object at some meaningful point in time (implementation defined) between when the Printer object receives the Print-Job Request and when the Printer object returns the response.

#### "job-state-reasons":

The Printer object MUST return the Job object's REQUIRED "job-state-reasons" attribute. . Issue 30

"job-state-message":

The Printer object OPTIONALLY returns the Job object's OPTIONAL "job-state-message" attribute. If the Printer object supports this attribute then it MUST be returned in the response. If this attribute is not returned in the response, the client can assume that the "job-state-message" attribute is not supported and will not be returned in a subsequent Job object query.

152215231524

1525

1526

1527

1528

1519

1520

1521

"number-of-intervening-jobs":

The Printer object OPTIONALLY returns the Job object's OPTIONAL "number-of-intervening-jobs" attribute. If the Printer object supports this attribute then it MUST be returned in the response. If this attribute is not returned in the response, the client can assume that the "number-of-intervening-jobs" attribute is not supported and will not be returned in a subsequent Job object query.

1529 1530 1531

Note: Since any printer state information which affects a job's state is reflected in the "job-state" and "job-state-reasons" attributes, it is sufficient to return only these attributes and no specific printer status attributes.

15331534

1535

1536

1537

1538

1532

Note: In addition to the MANDATORY parameters required for every operation response, the simplest response consists of the just the "attributes-charset" and "attributes-natural-language" operation attributes and the "job-uri", "job-id", and "job-state" Job Object Attributes. In this simplest case, the status code is 'successful-ok' and there is no "status-message" operation attribute.

1539

# 3.2.2 Print-URI Operation

- This OPTIONAL operation is identical to the Print-Job operation (section 3.2.1) except that a client
- supplies a URI reference to the document data using the "document-uri" (uri) operation attribute (in Group
- 1) rather than including the document data itself. Before returning the response, the Printer MUST validate
- that the Printer supports the retrieval method (e.g., http, ftp, etc.) implied by the URI, and MUST check for
- valid URI syntax. If the client-supplied URI scheme is not supported, i.e. the value is not in the Printer
- object's "referenced-uri-scheme-supported" attribute, the Printer object MUST reject the request and return
- the 'client-error-uri-scheme-not-supported' status code.
- The IPP Printer MAY validate the accessibility of the document as part of the operation or subsequently. If
- the Printer determines an accessibility problem before returning an operation response, it rejects the request
- and returns the 'client-error-document-access-error' status code. The Printer MAY also return a specific
- document access error code using the "document-access-error" operation attribute (see section 3.1.6.4).

1551 Issue 35

- 1552 If the Printer determines this document accessibility problem after accepting the request and returning an
- operation response with one of the successful status codes, the Printer adds the 'document-access-error'
- value to the job's "job-state-reasons" attribute and MAY populate the job's "job-document-access-errors"
- Job Description attribute (see section 4.3.11). See The Implementer's Guide [IPP-IIG] for suggested
- additional checks. Issue 35

- 1557 If the Printer object supports this operation, it MUST support the "reference-uri-schemes-supported" Printer
- attribute (see section 4.4.27).
- 1559 It is up to the IPP object to interpret the URI and subsequently "pull" the document from the source
- referenced by the URI string.
- 1561 3.2.3 Validate-Job Operation
- This REQUIRED operation is similar to the Print-Job operation (section 3.2.1) except that a client supplies
- no document data and the Printer allocates no resources (i.e., it does not create a new Job object). This
- operation is used only to verify capabilities of a printer object against whatever attributes are supplied by
- the client in the Validate-Job request. By using the Validate-Job operation a client can validate that an
- identical Print-Job operation (with the document data) would be accepted. The Validate-Job operation also
- performs the same security negotiation as the Print-Job operation (see section 8), so that a client can check
- that the client and Printer object security requirements can be met before performing a Print-Job operation.
- The Validate-Job operation does not accept a "document-uri" attribute in order to allow a client to check
- that the same Print-URI operation will be accepted, since the client doesn't send the data with the Print-URI
- operation. The client SHOULD just issue the Print-URI request.
- The Printer object returns the same status codes, Operation Attributes (Group 1) and Unsupported
- Attributes (Group 2) as the Print-Job operation. However, no Job Object Attributes (Group 3) are returned,
- since no Job object is created.
- 1575 3.2.4 Create-Job Operation
- This OPTIONAL operation is similar to the Print-Job operation (section 3.2.1) except that in the Create-Job
- request, a client does not supply document data or any reference to document data. Also, the client does not
- supply any of the "document-name", "document-format", "compression", or "document-natural-language"
- operation attributes. This operation is followed by one or more Send-Document or Send-URI operations.
- In each of those operation requests, the client OPTIONALLY supplies the "document-name", "document-
- format", and "document-natural-language" attributes for each document in the multi-document Job object.
- 1582 If a Printer object supports the Create-Job operation, it MUST also support the Send-Document operation
- and also MAY support the Send-URI operation.
- 1584 If the Printer object supports this operation, it MUST support the "multiple-operation-time-out" Printer
- attribute (see section 4.4.31).
- 1586 If the Printer object supports this operation, then it MUST support the "multiple-document-jobs-supported"
- Printer Description attribute (see section 4.4.16) and indicate whether or not it supports multiple-document
- 1588 jobs. Issue 34
- 1589 If the Printer object supports this operation and supports multiple documents in a job, then it MUST support
- the "multiple-document-handling" Job Template job attribute with at least one value (see section 4.2.4) and

- the associated "multiple-document-handling-default" and "multiple-document-handling-supported" Job
  Template Printer attributes (see section 4.2). Issue 34
- After the Create-Job operation has completed, the value of the "job-state" attribute is similar to the "job-
- state" after a Print-Job, even though no document-data has arrived. A Printer MAY set the job-data-
- insufficient' value of the job's "job-state-reason" attribute to indicate that processing cannot begin until
- sufficient data has arrived and set the "job-state" to either 'pending' or 'pending-held'. A non-spooling
- printer that doesn't implement the 'pending' job state may even set the "job-state" to 'processing', even
- though there is not yet any data to process. See sections 4.3.7 and 4.3.8. Issue 13
- 3.2.5 Get-Printer-Attributes Operation
- This REQUIRED operation allows a client to request the values of the attributes of a Printer object. In the
- request, the client supplies the set of Printer attribute names and/or attribute group names in which the
- requester is interested. In the response, the Printer object returns a corresponding attribute set with the
- appropriate attribute values filled in.

1606

1607

1608

1609

1610 1611

- For Printer objects, the possible names of attribute groups are:
  - 'job-template': the subset of the Job Template attributes that apply to a Printer object (the last two columns of the table in Section 4.2) that the implementation supports for Printer objects.
  - 'printer-description': the subset of the attributes specified in Section 4.4 that the implementation supports for Printer objects.
  - 'all': the special group 'all' that includes all attributes that the implementation supports for Printer objects. Issue 23
- Since a client MAY request specific attributes or named groups, there is a potential that there is some
- overlap. For example, if a client requests, 'printer-name' and 'all', the client is actually requesting the
- "printer-name" attribute twice: once by naming it explicitly, and once by inclusion in the 'all' group. In such
- cases, the Printer object NEED NOT return each attribute only once in the response even if it is requested
- multiple times. The client SHOULD NOT request the same attribute in multiple ways.
- 1617 It is NOT REQUIRED that a Printer object support all attributes belonging to a group (since some attributes
- are OPTIONAL). However, it is REQUIRED that each Printer object support all group names.
- 3.2.5.1 Get-Printer-Attributes Request
- The following sets of attributes are part of the Get-Printer-Attributes Request:
- 1621 Group 1: Operation Attributes
- Natural Language and Character Set:
- The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.

Target:

The "printer-uri" (uri) operation attribute which is the target for this operation as described in section 3.1.5.

Requesting User Name:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

"requested-attributes" (1setOf keyword):

The client OPTIONALLY supplies a set of attribute names and/or attribute group names in whose values the requester is interested. The Printer object MUST support this attribute. If the client omits this attribute, the Printer MUST respond as if this attribute had been supplied with a value of 'all'.

"document-format" (mimeMediaType):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. This attribute is useful for a Printer object to determine the set of supported attribute values that relate to the requested document format. The Printer object MUST return the attributes and values that it uses to validate a job on a create or Validate-Job operation in which this document format is supplied. The Printer object SHOULD return only (1) those attributes that are supported for the specified format and (2) the attribute values that are supported for the specified document format. By specifying the document format, the client can get the Printer object to eliminate the attributes and values that are not supported for a specific document format. For example, a Printer object might have multiple interpreters to support both 'application/postscript' (for PostScript) and 'text/plain' (for text) documents. However, for only one of those interpreters might the Printer object be able to support "number-up" with values of '1', '2', and '4'. For the other interpreter it might be able to only support "number-up" with a value of '1'. Thus a client can use the Get-Printer-Attributes operation to obtain the attributes and values that will be used to accept/reject a create job operation.

If the Printer object does not distinguish between different sets of supported values for each different document format when validating jobs in the create and Validate-Job operations, it MUST NOT distinguish between different document formats in the Get-Printer-Attributes operation. If the Printer object does distinguish between different sets of supported values for each different document format specified by the client, this specialization applies only to the following Printer object attributes:

- Printer attributes that are Job Template attributes ("xxx-default" "xxx-supported", and "xxx-ready" in the Table in Section 4.2),
- "pdl-override-supported",
- "compression-supported",
- "job-k-octets-supported",
- "job-impressions-supported,
- "job-media-sheets-supported"
- "printer-driver-installer",

- "color-supported", and
- "reference-uri-schemes-supported"

The values of all other Printer object attributes (including "document-format-supported") remain invariant with respect to the client supplied document format (except for new Printer description attribute as registered according to section 6.2).

If the client omits this "document-format" operation attribute, the Printer object MUST respond as if the attribute had been supplied with the value of the Printer object's "document-format-default" attribute. It is recommended that the client always supply a value for "document-format", since the Printer object's "document-format-default" may be 'application/octet-stream', in which case the returned attributes and values are for the union of the document formats that the Printer can automatically sense. For more details, see the description of the 'mimeMediaType' attribute syntax in section 4.1.9.

If the client supplies a value for the "document-format" Operation attribute that is not supported by the Printer, i.e., is not among the values of the Printer object's "document-format-supported" attribute, the Printer object MUST reject the operation and return the 'client-error-document-format-not-supported' status code.

### 3.2.5.2 Get-Printer-Attributes Response

The Printer object returns the following sets of attributes as part of the Get-Printer-Attributes Response:

#### Group 1: Operation Attributes

Status Message:

In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text(255)) operation attribute as described in sections 13 and 3.1.6.

#### Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.

# Group 2: Unsupported Attributes

See section 3.1.7 for details on returning Unsupported Attributes.

The response NEED NOT contain the "requested-attributes" operation attribute with any supplied values (attribute keywords) that were requested by the client but are not supported by the IPP object. If the Printer object does include unsupported attributes referenced in "requested-attributes" and such attributes include group names, such as 'all', the unsupported attributes MUST NOT include attributes described in the standard but not supported by the implementation. Issue 23

# Group 3: Printer Object Attributes

This is the set of requested attributes and their current values. The Printer object ignores (does not respond with) any requested attribute which is not supported. The Printer object MAY respond with a subset of the supported attributes and values, depending on the security policy in force. However, the Printer object MUST respond with the 'unknown' value for any supported attribute (including all REQUIRED attributes) for which the Printer object does not know the value. Also the Printer object MUST respond with the 'no-value' for any supported attribute (including all REQUIRED attributes) for which the system administrator has not configured a value. See the description of the "out-of-band" values in the beginning of Section 4.1.

17171718

1719

1710

1711

1712

1713

1714

1715

1716

3.2.6 Get-Jobs Operation

- This REQUIRED operation allows a client to retrieve the list of Job objects belonging to the target Printer
- object. The client may also supply a list of Job attribute names and/or attribute group names. A group of
- Job object attributes will be returned for each Job object that is returned.
- This operation is similar to the Get-Job-Attributes operation, except that this Get-Jobs operation returns
- attributes from possibly more than one object (see the description of Job attribute group names in section
- 1725 3.3.4).
- 1726 3.2.6.1 Get-Jobs Request
- The client submits the Get-Jobs request to a Printer object.
- The following groups of attributes are part of the Get-Jobs Request:
- Group 1: Operation Attributes
  - Natural Language and Character Set:
    - The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.

173117321733

1734

1730

Target

The "printer-uri" (uri) operation attribute which is the target for this operation as described in section 3.1.5.

173517361737

1738

Requesting User Name:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

1739 1740 1741

1742

1743

1744

1745

1746

1747

"limit" (integer(1:MAX)):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It is an integer value that determines the maximum number of jobs that a client will receive from the Printer even if "which-jobs" or "my-jobs" constrain which jobs are returned. The limit is a "stateless limit" in that if the value supplied by the client is 'N', then only the first 'N' jobs are returned in the Get-Jobs Response. There is no mechanism to allow for the next 'M' jobs after the first 'N' jobs. If the client does not supply this attribute, the Printer object responds with all applicable jobs. Issue 8

1750

1751

1752

1753

1754

"requested-attributes" (1setOf keyword):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It is a set of Job attribute names and/or attribute groups names in whose values the requester is interested. This set of attributes is returned for each Job object that is returned. The allowed attribute group names are the same as those defined in the Get-Job-Attributes operation in section 3.3.4. If the client does not supply this attribute, the Printer MUST respond as if the client had supplied this attribute with two values: 'job-uri' and 'job-id'.

1755 1756 1757

"which-jobs" (keyword):

1759 1760

1758

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It indicates which Job objects MUST be returned by the Printer object. The values for this attribute are:

1761 1762

1763

'completed'. This includes any Job object whose state is 'completed', 'canceled', or 'aborted'. 'not-completed': This includes any Job object whose state is 'pending', 'processing', 'processingstopped', or 'pending-held'.

1764 1765 1766

1767

A Printer object MUST support both values. However, if the implementation does not keep jobs in the 'completed', 'canceled', and 'aborted' states, then it returns no jobs when the 'completed' value is supplied.

1768 1769 1770

If a client supplies some other value, the Printer object MUST copy the attribute and the unsupported value to the Unsupported Attributes response group, reject the request, and return the 'client-error-attributes-or-values-not-supported' status code.

1772 1773 1774

1771

If the client does not supply this attribute, the Printer object MUST respond as if the client had supplied the attribute with a value of 'not-completed'.

1775 1776 1777

"my-jobs" (boolean):

1778 1779 1780 The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It indicates whether jobs from all users or just the jobs submitted by the requesting user of this request MUST be returned by the Printer object. If the client does not supply this attribute, the Printer object MUST respond as if the client had supplied the attribute with a value of 'false', i.e., jobs from all users. The means for authenticating the requesting user and matching the jobs is described in section 8.

1782 1783

1784

1781

3.2.6.2 Get-Jobs Response

1785 1786

1787

The Printer object returns all of the Job objects up to the number specified by the "limit" attribute that match the criteria as defined by the attribute values supplied by the client in the request. It is possible that no Job objects are returned since there may literally be no Job objects at the Printer, or there may be no Job

objects that match the criteria supplied by the client. If the client requests any Job attributes at all, there is a 1788

set of Job Object Attributes returned for each Job object. 1789

It is not an error for the Printer to return 0 jobs. If the response returns 0 jobs because there are no jobs matching the criteria, and the request would have returned 1 or more jobs with a status code of 'successful-ok' if there had been jobs matching the criteria, then the status code for 0 jobs MUST be 'successful-ok'.

Issue 24

# Group 1: Operation Attributes

### Status Message:

In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text(255)) operation attribute as described in sections 13 and 3.1.6.

# Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.

# Group 2: Unsupported Attributes

See section 3.1.7 for details on returning Unsupported Attributes.

The response NEED NOT contain the "requested-attributes" operation attribute with any supplied values (attribute keywords) that were requested by the client but are not supported by the IPP object. If the Printer object does include unsupported attributes referenced in "requested-attributes" and such attributes include group names, such as 'all', the unsupported attributes MUST NOT include attributes described in the standard but not supported by the implementation. Issue 23

# Groups 3 to N: Job Object Attributes

The Printer object responds with one set of Job Object Attributes for each returned Job object. The Printer object ignores (does not respond with) any requested attribute or value which is not supported or which is restricted by the security policy in force, including whether the requesting user is the user that submitted the job (job originating user) or not (see section 8). However, the Printer object MUST respond with the 'unknown' value for any supported attribute (including all REQUIRED attributes) for which the Printer object does not know the value, unless it would violate the security policy. See the description of the "out-of-band" values in the beginning of Section 4.1.

Jobs are returned in the following order:

- If the client requests all 'completed' Jobs (Jobs in the 'completed', 'aborted', or 'canceled' states), then the Jobs are returned newest to oldest (with respect to actual completion time)
- If the client requests all 'not-completed' Jobs (Jobs in the 'pending', 'processing', 'pending-held', and 'processing-stopped' states), then Jobs are returned in relative chronological order of expected time to complete (based on whatever scheduling algorithm is configured for the Printer object).

### 3.2.7 Pause-Printer Operation

This OPTIONAL operation allows a client to stop the Printer object from scheduling jobs on all its devices.

Depending on implementation, the Pause-Printer operation MAY also stop the Printer from processing the

deBry, Hastings, Herriot, Isaacson, Powell

1854

current job or jobs. Any job that is currently being printed is either stopped as soon as the implementation permits or is completed, depending on implementation. The Printer object MUST still accept create operations to create new jobs, but MUST prevent any jobs from entering the 'processing' state.

1833 If the Pause-Printer operation is supported, then the Resume-Printer operation MUST be supported, and vice-versa.

The IPP Printer stops the current job(s) on its device(s) that were in the 'processing' or 'processing-stopped' states as soon as the implementation permits. If the implementation Issue 30 will take appreciable time to stop, the IPP Printer adds the 'moving-to-paused' value to the Printer object's "printer-state-reasons" attribute (see section 4.4.12). When the device(s) have all stopped, the IPP Printer transitions the Printer object to the 'stopped' state, removes the 'moving-to-paused' value, if present, and adds the 'paused' value to the Printer object's "printer-state-reasons" attribute.

When the current job(s) complete that were in the 'processing' state, the IPP Printer transitions them to the 'completed' state. When the current job(s) stop in mid processing that were in the 'processing' state, the IPP Printer transitions them to the 'processing-stopped' state and Issue 30 adds the 'printer-stopped' value to the job's "job-state-reasons" attribute.

For any jobs that are 'pending' or 'pending-held', the 'printer-stopped' value of the jobs' "job-state-reasons" attribute also applies. However, the IPP Printer NEED NOT update those jobs' "job-state-reasons" attributes and only need return the 'printer-stopped' value when those jobs are queried (so-called "lazy evaluation").

Whether the Pause-Printer operation affects jobs that were submitted to the device from other sources than the IPP Printer object in the same way that the Pause-Printer operation affects jobs that were submitted to the IPP Printer object using IPP, depends on implementation, i.e., on whether the IPP protocol is being used as a universal management protocol or just to manage IPP jobs, respectively.

The IPP Printer MUST accept the request in any state and transition the Printer to the indicated new "printer-state" before returning as follows:

Current "printer-state"	New "printer-state"	"printer- state- reasons"	IPP Printer's response status code and action:
'idle'	'stopped'	'paused'	'successful-ok'
'processing'	'processing'	'moving-to- paused'	OPTION 1: 'successful-ok'; Later, when all output has stopped, the "printer- state" becomes 'stopped', and the 'paused' value replaces the 'moving-to-paused' value in the "printer-state-reasons" attribute
'processing'	'stopped'	'paused'	OPTION 2: 'successful-ok'; all device output stopped immediately
'stopped'	'stopped'	'paused'	'successful-ok'

Access Rights: The authenticated user (see section 8.3) performing this operation must be an operator or 1855 administrator of the Printer object (see Sections 1 and 8.5). Otherwise, the IPP Printer MUST reject the 1856 operation and return: 'client-error-forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' 1857 as appropriate. 1858 3.2.7.1 Pause-Printer Request 1859 The following groups of attributes are part of the Pause-Printer Request: 1860 1861

Group 1: Operation Attributes

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.

Target: 1865

1862

1863 1864

1866

1867 1868

1870

1871

1876

1877 1878

1879

1880 1881

1882

1883 1884

1885

The "printer-uri" (uri) operation attribute which is the target for this operation as described in section 3.1.5.

Requesting User Name: 1869

> The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

3.2.7.2 Pause-Printer Response 1872

The following groups of attributes are part of the Pause-Printer Response: 1873

Group 1: Operation Attributes 1874

Status Message: 1875

> In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text(255)) operation attribute as described in sections 13 and 3.1.6.

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.

Group 2: Unsupported Attributes

See section 3.1.7 for details on returning Unsupported Attributes.

3.2.8 Resume-Printer Operation

This operation allows a client to resume the Printer object scheduling jobs on all its devices. The Printer 1886 object Issue 30 MUST remove the 'paused' and 'moving-to-paused' values from the Printer object's 1887 "printer-state-reasons" attribute, if present. If there are no other reasons to keep a device paused (such as 1888 media-jam), the IPP Printer transitions itself to the 'processing' or 'idle' states, depending on whether there 1889 are jobs to be processed or not, respectively, and the device(s) resume processing jobs. 1890

- 1891 If the Pause-Printer operation is supported, then the Resume-Printer operation MUST be supported, and vice-versa.
- The IPP Printer removes the 'printer-stopped' value from any job's "job-state-reasons" attributes contained in that Printer.
- The IPP Printer MUST accept the request in any state, transition the Printer object to the indicated new state as follows:

Current	New "printer-state"	IPP Printer's response status code and action:
"printer-state"		
'idle'	'idle'	'successful-ok'
'processing'	'processing'	'successful-ok'
'stopped'	'processing'	'successful-ok';
		when there are jobs to be processed
'stopped'	'idle'	'successful-ok';
		when there are no jobs to be processed.

- Access Rights: The authenticated user (see section 8.3) performing this operation must be an operator or administrator of the Printer object (see Sections 1 and 8.5). Otherwise, the IPP Printer MUST reject the operation and return: 'client-error-forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' as appropriate.
- The Resume-Printer Request and Resume-Printer Response have the same attribute groups and attributes as the Pause-Printer operation (see sections 3.2.7.1 and 3.2.7.2).
  - 3.2.9 Purge-Jobs Operation

- This OPTIONAL operation allows a client to remove all jobs from an IPP Printer object, regardless of their job states, including jobs in the Printer object's Job History (see Section 4.3.7.2). After a Purge-Jobs operation has been performed, a Printer object MUST return no jobs in subsequent Get-Job-Attributes and Get-Jobs responses (until new jobs are submitted).
- Whether the Purge-Jobs (and Get-Jobs) operation affects jobs that were submitted to the device from other sources than the IPP Printer object in the same way that the Purge-Jobs operation affects jobs that were submitted to the IPP Printer object using IPP, depends on implementation, i.e., on whether the IPP protocol is being used as a universal management protocol or just to manage IPP jobs, respectively.
- Note: if an operator wants to cancel all jobs without clearing out the Job History, the operator uses the Cancel-Job operation on each job instead of using the Purge-Job operation.
- The Printer object MUST accept this operation in any state and transition the Printer object to the 'idle' state.
- Access Rights: The authenticated user (see section 8.3) performing this operation must be an operator or administrator of the Printer object (see Sections 1 and 8.5). Otherwise, the IPP object MUST reject the

- operation and return: client-error-forbidden, client-error-not-authenticated, and client-error-not-authorized as appropriate.
- The Purge-Jobs Request and Purge-Jobs Response have the same attribute groups and attributes as the Pause-Printer operation (see sections 3.2.7.1 and 3.2.7.2).

1923

1949

1950

1951

1952

- 3.3 Job Operations
- All Job operations are directed at Job objects. A client MUST always supply some means of identifying the Job object in order to identify the correct target of the operation. That job identification MAY either be a single Job URI or a combination of a Printer URI with a Job ID. The IPP object implementation MUST support both forms of identification for every job.
- 1928 3.3.1 Send-Document Operation
- This OPTIONAL operation allows a client to create a multi-document Job object that is initially "empty" (contains no documents). In the Create-Job response, the Printer object returns the Job object's URI (the "job-uri" attribute) and the Job object's 32-bit identifier (the "job-id" attribute). For each new document that the client desires to add, the client uses a Send-Document operation. Each Send-Document Request contains the entire stream of document data for one document.
- 1934 If the Printer supports this operation but does not support multiple documents per job, the Printer MUST
  1935 reject subsequent Send-Document operations supplied with data and return the 'server-error-multiple1936 document-jobs-not-supported'. However, the Printer MUST accept the first document with a 'true' or 'false'
  1937 value for the "last-document" operation attribute (see below), so that clients MAY always submit one
  1938 document jobs with a 'false' value for "last-document" in the first Send-Document and a 'true' for "last1939 document" in the second Send-Document (with no data). Issue 34
- Since the Create-Job and the send operations (Send-Document or Send-URI operations) that follow could occur over an arbitrarily long period of time for a particular job, a client MUST send another send operation within an IPP Printer defined minimum time interval after the receipt of the previous request for the job. If a Printer object supports multiple document jobs, the Printer object MUST support the "multiple-operation-time-out" attribute (see section 4.4.31). This attribute indicates the minimum number of seconds the Printer object will wait for the next send operation before taking some recovery action.
- An IPP object MUST recover from an errant client that does not supply a send operation, sometime after the minimum time interval specified by the Printer object's "multiple-operation-time-out" attribute. Such recovery MAY include any of the following or other recovery actions:
  - 1. Assume that the Job is an invalid job, start the process of changing the job state to 'aborted', add the 'aborted-by-system' value to the job's "job-state-reasons" attribute (see section 4.3.8), <a href="Issue 30">Issue 30</a> and clean up all resources associated with the Job. In this case, if another send operation is finally received, the Printer responds with an "client-error-not-possible" or "client-error-not-found" depending on whether or not the Job object is still around when the send operation finally arrives.

- 2. Assume that the last send operation received was in fact the last document (as if the "last-document" flag had been set to 'true'), close the Job object, and proceed to process it (i.e., move the Job's state to 'pending').
- 3. Assume that the last send operation received was in fact the last document, close the Job, but move it to the 'pending-held' and add the 'submission-interrupted' value to the job's "job-state-reasons" attribute (see section 4.3.8). Issue 30 This action allows the user or an operator to determine whether to continue processing the Job by moving it back to the 'pending' state using the Release-Job operation (see section 3.3.6) or to cancel the job using the Cancel-Job operation (see section 3.3.3).

1965

1966

1967

1954

1955

1956

1957

1958

1959

1960

1961

Each implementation is free to decide the "best" action to take depending on local policy, whether any documents have been added, whether the implementation spools jobs or not, and/or any other piece of information available to it. If the choice is to abort the Job object, it is possible that the Job object may already have been processed to the point that some media sheet pages have been printed.

Access Rights: The authenticated user (see section 8.3) performing this operation must either be the job owner (as determined in the Create-Job operation) or an operator or administrator of the Printer object (see Sections 1 and 8.5). Otherwise, the IPP object MUST reject the operation and return: 'client-error-forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' as appropriate. Issue 19

# 1972 3.3.1.1 Send-Document Request

The following attribute sets are part of the Send-Document Request:

### 1974 Group 1: Operation Attributes

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.

# 1978 Target:

Either (1) the "printer-uri" (uri) plus "job-id" (integer(1:MAX))or (2) the "job-uri" (uri) operation attribute(s) which define the target for this operation as described in section 3.1.5.

1981

1975

1976 1977

1979

1980

1982

1983

#### Requesting User Name:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

198419851986

1987

1988

1989

1990

1991

1992

# "document-name" (name(MAX)):

The client OPTIONALLY supplies this attribute. The Printer object MUST support this attribute. It contains the client supplied document name. The document name MAY be different than the Job name. It might be helpful, but NEED NOT be unique across multiple documents in the same Job. Typically, the client software automatically supplies the document name on behalf of the end user by using a file name or an application generated name. See the description of the "document-name" operation attribute in the Print-Job Request (section 3.2.1.1) for more information about this attribute.

```
"compression" (type3 keyword)
1995
               See the description of "compression" for the Print-Job operation in Section 3.2.1.1.
1996
1997
           "document-format" (mimeMediaType):
1998
               See the description of "document-format" for the Print-Job operation in Section 3.2.1.1. Issue 11
1999
2000
           "document-natural-language" (naturalLanguage):
2001
               The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this
2002
               attribute. This attribute specifies the natural language of the document for those document-formats
2003
               that require a specification of the natural language in order to image the document unambiguously.
2004
               There are no particular values required for the Printer object to support.
2005
2006
2007
           "last-document" (boolean):
2008
               The client MUST supply this attribute. The Printer object MUST support this attribute. It is a
2009
               boolean flag that is set to 'true' if this is the last document for the Job, 'false' otherwise.
2010
2011
       Group 2: Document Content
2012
               The client MUST supply the document data if the "last-document" flag is set to 'false'. However,
2013
               since a client might not know that the previous document sent with a Send-Document (or Send-
2014
               URI) operation was the last document (i.e., the "last-document" attribute was set to 'false'), it is legal
2015
               to send a Send-Document request with no document data where the "last-document" flag is set to
2016
               'true'. Such a request MUST NOT increment the value of the Job object's "number-of-documents"
2017
               attribute, since no real document was added to the job.
2018
       3.3.1.2 Send-Document Response
2019
       The following sets of attributes are part of the Send-Document Response:
2020
       Group 1: Operation Attributes
2021
           Status Message:
2022
               In addition to the REQUIRED status code returned in every response, the response OPTIONALLY
2023
               includes a "status-message" (text(255)) operation attribute as described in sections 13 and 3.1.6.
2024
2025
           Natural Language and Character Set:
2026
               The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.
2027
2028
       Group 2: Unsupported Attributes
2029
               See section 3.1.7 for details on returning Unsupported Attributes.
2030
       Group 3: Job Object Attributes
2031
```

This is the same set of attributes as described in the Print-Job response (see section 3.2.1.2).

### 3.3.2 Send-URI Operation

2034

2046

2052

2053

2054

2055

This OPTIONAL operation is identical to the Send-Document operation (see section 3.3.1) except that a client MUST supply a URI reference ("document-uri" operation attribute) rather than the document data itself. If a Printer object supports this operation, clients can use both Send-URI or Send-Document operations to add new documents to an existing multi-document Job object. However, if a client needs to indicate that the previous Send-URI or Send-Document was the last document, the client MUST use the Send-Document operation with no document data and the "last-document" flag set to 'true' (rather than using a Send-URI operation with no "document-uri" operation attribute).

2042 If a Printer object supports this operation, it MUST also support the Print-URI operation (see section 3.2.2).

The Printer object MUST validate the syntax and URI scheme of the supplied URI before returning a response, just as in the Print-URI operation. The IPP Printer MAY validate the accessibility of the document as part of the operation or subsequently (see section 3.2.2). Issue 35

# 3.3.3 Cancel-Job Operation

This REQUIRED operation allows a client to cancel a Print Job from the time the job is created up to the time it is completed, canceled, or aborted. Since a Job might already be printing by the time a Cancel-Job is received, some media sheet pages might be printed before the job is actually terminated.

The IPP object MUST accept or reject the request based on the job's current state and transition the job to the indicated new state as follows:

Current "job-state"	New "job-state"	IPP object's response status code and action:
'pending'	'canceled'	'successful-ok'
'pending-held'	'canceled'	'successful-ok'
'processing'	'canceled'	'successful-ok'
'processing'	'processing'	'successful-ok' See Rule 1
'processing'	'processing'	'client-error-not-possible' See Rule 2
'processing-stopped'	'canceled'	'successful-ok'
'processing-stopped'	'processing-stopped'	'successful-ok' See Rule 1
'processing-stopped'	'processing-stopped'	'client-error-not-possible' See Rule 2
'completed'	'completed'	'client-error-not-possible'
'canceled'	'canceled'	'client-error-not-possible'
'aborted'	'aborted'	'client-error-not-possible'

Rule 1: If the implementation requires some measurable time to cancel the job in the 'processing' or 'processing-stopped' job states, the IPP object MUST add the 'processing-to-stop-point' value to the job's "job-state-reasons" attribute and then transition the job to the 'canceled' state when the processing ceases (see section 4.3.8).

Rule 2: If the Job object already has the 'processing-to-stop-point' value in its "job-state-reasons" attribute, then the Printer object MUST reject a Cancel-Job operation.

Access Rights: The authenticated user (see section 8.3) performing this operation must either be the job owner or an operator or administrator of the Printer object (see Sections 1 and 8.5). Otherwise, the IPP object MUST reject the operation and return: 'client-error-forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' as appropriate.

### 3.3.3.1 Cancel-Job Request

The following groups of attributes are part of the Cancel-Job Request:

# 2064 Group 1: Operation Attributes

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.

2068 Target:

2062

2063

2065

2066 2067

2069

2070 2071

2072

2073

20742075

2076

2077

2078

2079

2080

2081

20822083

2084

2087

2088

2089 2090

2091

2092 2093

2094

2095

Either (1) the "printer-uri" (uri) plus "job-id" (integer(1:MAX))or (2) the "job-uri" (uri) operation attribute(s) which define the target for this operation as described in section 3.1.5.

Requesting User Name:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

"message" (text(127)):

The client OPTIONALLY supplies this attribute. The Printer object OPTIONALLY supports this attribute. It is a message to the operator. This "message" attribute is not the same as the "job-message-from-operator" attribute. That attribute is used to report a message from the operator to the end user that queries that attribute. This "message" operation attribute is used to send a message from the client to the operator along with the operation request. It is an implementation decision of how or where to display this message to the operator (if at all).

# 3.3.3.2 Cancel-Job Response

The following sets of attributes are part of the Cancel-Job Response:

# 2086 Group 1: Operation Attributes

Status Message:

In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text(255)) operation attribute as described in sections 13 and 3.1.6.

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2.

Group 2: Unsupported Attributes

See section 3.1.7 for details on returning Unsupported Attributes.

deBry, Hastings, Herriot, Isaacson, Powell

2102

Once a successful response has been sent, the implementation guarantees that the Job will eventually end up in the 'canceled' state. Between the time of the Cancel-Job operation is accepted and when the job enters the 'canceled' job-state (see section 4.3.7), the "job-state-reasons" attribute SHOULD contain the 'processing-to-stop-point' value which indicates to later queries that although the Job might still be 'processing', it will eventually end up in the 'canceled' state, not the 'completed' state.

# 3.3.4 Get-Job-Attributes Operation

- This REQUIRED operation allows a client to request the values of attributes of a Job object and it is almost identical to the Get-Printer-Attributes operation (see section 3.2.5). The only differences are that the operation is directed at a Job object rather than a Printer object, there is no "document-format" operation attribute used when querying a Job object, and the returned attribute group is a set of Job object attributes rather than a set of Printer object attributes.
- For Jobs, the possible names of attribute groups are:
  - 'job-template': the subset of the Job Template attributes that apply to a Job object (the first column of the table in Section 4.2) that the implementation supports for Job objects.
  - 'job-description': the subset of the Job Description attributes specified in Section 4.3 that the implementation supports for Job objects.
  - 'all': the special group 'all' that includes all attributes that the implementation supports for Job objects.

    Issue 23

2114 2115

2109

2110

2111

2112

2113

- Since a client MAY request specific attributes or named groups, there is a potential that there is some overlap. For example, if a client requests, 'job-name' and 'job-description', the client is actually requesting the "job-name" attribute once by naming it explicitly, and once by inclusion in the 'job-description' group.

  In such cases, the Printer object NEED NOT return the attribute only once in the response even if it is requested multiple times. The client SHOULD NOT request the same attribute in multiple ways.
- It is NOT REQUIRED that a Job object support all attributes belonging to a group (since some attributes are OPTIONAL). However it is REQUIRED that each Job object support all group names.
- 3.3.4.1 Get-Job-Attributes Request
- The following groups of attributes are part of the Get-Job-Attributes Request when the request is directed at a Job object:
- 2126 Group 1: Operation Attributes
- Natural Language and Character Set:
- The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.1.

Either (1) the "printer-uri" (uri) plus "job-id" (integer(1:MAX)) or (2) the "job-uri" (uri) operation attribute(s) which define the target for this operation as described in section 3.1.5.

2133 2134

2135

Requesting User Name:

The "requesting-user-name" (name(MAX)) attribute SHOULD be supplied by the client as described in section 8.3.

213621372138

2139

2140

2141

"requested-attributes" (1setOf keyword):

The client OPTIONALLY supplies this attribute. The IPP object MUST support this attribute. It is a set of attribute names and/or attribute group names in whose values the requester is interested. If the client omits this attribute, the IPP object MUST respond as if this attribute had been supplied with a value of 'all'.

21422143

2144

# 3.3.4.2 Get-Job-Attributes Response

The Printer object returns the following sets of attributes as part of the Get-Job-Attributes Response:

# 2146 Group 1: Operation Attributes

Status Message:

In addition to the REQUIRED status code returned in every response, the response OPTIONALLY includes a "status-message" (text(255)) operation attribute as described in sections 13 and 3.1.6.

214921502151

2152

2153

2154

2147

2148

Natural Language and Character Set:

The "attributes-charset" and "attributes-natural-language" attributes as described in section 3.1.4.2. The "attributes-natural-language" MAY be the natural language of the Job object, rather than the one requested.

2155

2156

# Group 2: Unsupported Attributes

See section 3.1.7 for details on returning Unsupported Attributes.

215721582159

2160

2161

2162

The response NEED NOT contain the "requested-attributes" operation attribute with any supplied values (attribute keywords) that were requested by the client but are not supported by the IPP object. If the Printer object does include unsupported attributes referenced in "requested-attributes" and such attributes include group names, such as 'all', the unsupported attributes MUST NOT include attributes described in the standard but not supported by the implementation. Issue 23

21632164

2165

2166

2167

2168

2169

### Group 3: Job Object Attributes

This is the set of requested attributes and their current values. The IPP object ignores (does not respond with) any requested attribute or value which is not supported or which is restricted by the security policy in force, including whether the requesting user is the user that submitted the job (job originating user) or not (see section 8). However, the IPP object MUST respond with the 'unknown'

value for any supported attribute (including all REQUIRED attributes) for which the IPP object does not know the value, unless it would violate the security policy. See the description of the "out-of-band" values in the beginning of Section 4.1.

### 3.3.5 Hold-Job Operation

2173

2180

2181

2191

2192

2193

2194

This OPTIONAL operation allows a client to hold a pending job in the queue so that it is not eligible for scheduling. If the Hold-Job operation is supported, then the Release-Job operation MUST be supported, and vice-versa. The OPTIONAL "job-hold-until" operation attribute allows a client to specify whether to hold the job indefinitely or until a specified time period, if supported.

The IPP object MUST accept or reject the request based on the job's current state and transition the job to the indicated new state as follows:

Current "job-state"	New "job-state"	IPP object's response status code and action:
'pending'	'pending-held'	'successful-ok' See Rule 1
'pending'	'pending'	'successful-ok' See Rule 2
'pending-held'	'pending-held'	'successful-ok' See Rule 1
'pending-held'	'pending'	'successful-ok' See Rule 2
'processing'	'processing'	'client-error-not-possible'
'processing-stopped'	'processing-stopped'	'client-error-not-possible'
'completed'	'completed'	'client-error-not-possible'
'canceled'	'canceled'	'client-error-not-possible'
'aborted'	'aborted'	'client-error-not-possible'

Rule 1: If the implementation supports multiple reasons for a job to be in the 'pending-held' state, the IPP object MUST add the 'job-hold-until-specified' value to the job's "job-state-reasons" attribute.

Rule 2: If the IPP object supports the "job-hold-until" operation attribute, but the specified time period has already started (or is the 'no-hold' value) and there are no other reasons to hold the job, the IPP object MUST make the job be a candidate for processing immediately (see Section 4.2.2) by putting the job in the 'pending' state.

Note: In order to keep the Hold-Job operation simple, such a request is rejected when the job is in the 'processing' or 'processing-stopped' states. If an operation is needed to hold jobs while in these states, it will be added as an additional operation, rather than overloading the Hold-Job operation. Then it is clear to clients by querying the Printer object's "operations-supported" (see Section 4.4.15) and the Job object's "job-state" (see Section 4.3.7) attributes which operations are possible.

Access Rights: The authenticated user (see section 8.3) performing this operation must either be the job owner or an operator or administrator of the Printer object (see Sections 1 and 8.5). Otherwise, the IPP object MUST reject the operation and return: 'client-error-forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' as appropriate.

# 3.3.5.1 Hold-Job Request

2195

2198

2199

2200

2201

2202

2203

2204

2205

2206

2207

2208

2209

2210

2211

2212

2213

2214

2215

2216

2217

2218

2219

2220

2221

The groups and operation attributes are the same as for a Cancel-Job request (see section 3.3.3.1), with the addition of the following Group 1 Operation attribute:

"job-hold-until" (type3 keyword | name(MAX)):

The client OPTIONALLY supplies this Operation attribute. The IPP object MUST support this operation attribute in a Hold-Job request, if it supports the "job-hold-until" Job template attribute in create operations. See section 4.2.2. The IPP object SHOULD support the "job-hold-until" Job Template attribute for use in job create operations with at least the 'indefinite' value, if it supports the Hold-Job operation. Otherwise, a client cannot create a job and hold it immediately (without picking some supported time period in the future).

If supplied and supported as specified in the Printer's "job-hold-until-supported" attribute, the IPP object copies the supplied operation attribute to the Job object, replacing the job's previous "job-hold-until" attribute, if present, and makes the job a candidate for scheduling during the supplied named time period.

If supplied, but either the "job-hold-until" Operation attribute itself or the value supplied is not supported, the IPP object accepts the request, returns the unsupported attribute or value in the Unsupported Attributes Group according to section 3.1.7, returns the 'successful-ok-ignored-or-substituted-attributes, and holds the job indefinitely until a client performs a subsequent Release-Job operation.

If the client (1) supplies a value that specifies a time period that has already started or the 'no-hold' value (meaning don't hold the job) and (2) the IPP object supports the "job-hold-until" operation attribute and there are no other reasons to hold the job, the IPP object MUST accept the operation and make the job be a candidate for processing immediately (see Section 4.2.2).

If the client does not supply a "job-hold-until" Operation attribute in the request, the IPP object MUST populate the job object with a "job-hold-until" attribute with the 'indefinite' value (if IPP object supports the "job-hold-until" attribute) and hold the job indefinitely, until a client performs a Release-Job operation.

### 3.3.5.2 Hold-Job Response

The groups and attributes are the same as for a Cancel-Job response (see section 3.3.3.2).

# 3.3.6 Release-Job Operation

- This OPTIONAL operation allows a client to release a previously held job so that it is again eligible for scheduling. If the Hold-Job operation is supported, then the Release-Job operation MUST be supported, and vice-versa.
- This operation removes the "job-hold-until" job attribute, if present, from the job object that had been supplied in the create or most recent Hold-Job or Restart-Job operation and remove its effect on the job.

Issue 30 The IPP object MUST remove the 'job-hold-until-specified' value from the job's "job-state-reasons" attribute, if present. See section 4.3.8.

The IPP object MUST accept or reject the request based on the job's current state and transition the job to the indicated new state as follows:

Current "job-state"	New "job-state"	IPP object's response status code and action:
'pending'	'pending'	'successful-ok' No effect on the job.
'pending-held'	'pending-held'	'successful-ok' See Rule 1
'pending-held'	'pending'	'successful-ok'
'processing'	'processing'	'successful-ok' No effect on the job.
'processing-stopped'	'processing-stopped'	'successful-ok' No effect on the job.
'completed'	'completed'	'client-error-not-possible'
'canceled'	'canceled'	'client-error-not-possible'
'aborted'	'aborted'	'client-error-not-possible'

Rule 1: If there are other reasons to keep the job in the 'pending-held' state, such as 'resources-are-not-ready', the job remains in the 'pending-held' state. Thus the 'pending-held' state is not just for jobs that have the 'job-hold-until' applied to them, but are for any reason to keep the job from being a candidate for scheduling and processing, such as 'resources-are-not-ready'. See the "job-hold-until" attribute (section 4.2.2).

- Access Rights: The authenticated user (see section 8.3) performing this operation must either be the job owner or an operator or administrator of the Printer object (see Sections 1 and 8.5). Otherwise, the IPP object MUST reject the operation and return: 'client-error-forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' as appropriate.
- The Release-Job Request and Release-Job Response have the same attribute groups and attributes as the Cancel-Job operation (see section 3.3.3.1 and 3.3.3.2).
- 2245 3.3.7 Restart-Job Operation
- This OPTIONAL operation allows a client to restart a job that is retained in the queue after processing has completed (see section 4.3.7.2).
- The job is moved to the 'pending' job state and restarts at the beginning on the same IPP Printer object with the same attribute values. The Job Description attributes that accumulate job progress, such as "job-
- impressions-completed", "job-media-sheets-completed", and "job-k-octets-processed", MUST be reset to 0
- so that they give an accurate record of the job from its restart point. The job object MUST continue to use
- 2252 the same "job-uri" and "job-id" attribute values.
- Note: If in the future an operation is needed that does not reset the job progress attributes, then a new operation will be defined which makes a copy of the job, assigns a new "job-uri" and "job-id" to the copy
- and resets the job progress attributes in the new copy only.

The IPP object MUST accept or reject the request based on the job's current state, transition the job to the indicated new state as follows:

Current "job-state"	New "job-state"	IPP object's response status code and action:
'pending'	'pending'	'client-error-not-possible'.
'pending-held'	'pending-held'	'client-error-not-possible'.
'processing'	'processing'	'client-error-not-possible'.
'processing-stopped'	'processing-stopped'	'client-error-not-possible'.
'completed'	'pending'	'successful-ok' - job is started over.
'completed'	'completed'	'client-error-not-possible' - see Rule 1
'canceled'	'pending'	'successful-ok' - job is started over.
'canceled'	'canceled'	'client-error-not-possible' - see Rule 1
'aborted'	'pending'	'successful-ok' - job is started over.
'aborted'	'aborted'	'client-error-not-possible' - see Rule 1

Rule 1: If the Job Retention Period has expired for the job in this state, then the IPP object rejects the operation. See section 4.3.7.2.

Note: In order to prevent a user from inadvertently restarting a job in the middle, the Restart-Job request is rejected when the job is in the 'processing' or 'processing-stopped' states. If in the future an operation is needed to hold or restart jobs while in these states, it will be added as an additional operation, rather than overloading the Restart-Job operation, so that it is clear that the user intended that the current job not be completed.

Access Rights: The authenticated user (see section 8.3) performing this operation must either be the job owner or an operator or administrator of the Printer object (see Sections 1 and 8.5). Otherwise, the IPP object MUST reject the operation and return: 'client-error-forbidden', 'client-error-not-authenticated', or 'client-error-not-authorized' as appropriate.

### 3.3.7.1 Restart-Job Request

The groups and attributes are the same as for a Cancel-Job request (see section 3.3.3.1), with the addition of the following Group 1 Operation attribute:

"job-hold-until" (type3 keyword | name(MAX)):

The client OPTIONALLY supplies this attribute. The IPP object MUST support this Operation attribute in a Restart-Job request, if it supports the "job-hold-until" Job Template attribute in create operations. See section 4.2.2. Otherwise, the IPP object NEED NOT support the "job-hold-until" Operation attribute in a Restart-Job request.

If supplied and supported as specified in the Printer's "job-hold-until-supported" attribute, the IPP object copies the supplied Operation attribute to the Job object, replacing the job's previous "job-hold-until" attribute, if present, and makes the job a candidate for scheduling during the supplied named time period. See section 4.2.2.

2287

2288

2289

2290

2291

2292

2293

2294

2295

2296

2297

2298

2303

2304

2305

2306

2307

2282 If supplied, but the value is not supported, the IPP object accepts the request, returns the
2283 unsupported attribute or value in the Unsupported Attributes Group according to section 3.1.7,
2284 returns the 'successful-ok-ignored-or-substituted-attributes' status code, and holds the job
2285 indefinitely until a client performs a subsequent Release-Job operation.

If supplied, but the "job-hold-until" Operation attribute itself is not supported, the IPP object accepts the request, returns the unsupported attribute with the out-of-band 'unsupported' value in the Unsupported Attributes Group according to section 3.1.7, returns the 'successful-ok-ignored-or-substituted-attributes' status code, and restarts the job, i.e., ignores the "job-hold-until" attribute.

If the client (1) supplies a value that specifies a time period that has already started or the 'no-hold' value (meaning don't hold the job) and (2) the IPP object supports the "job-hold-until" operation attribute and there are no other reasons to hold the job, the IPP object makes the job a candidate for processing immediately (see Section 4.2.2).

If the client does not supply a "job-hold-until" operation attribute in the request, the IPP object removes the "job-hold-until" attribute, if present, from the job. If there are no other reasons to hold the job, the Restart-Job operation makes the job a candidate for processing immediately (see Section 4.2.2).

### 3.3.7.2 Restart-Job Response

- The groups and attributes are the same as for a Cancel-Job response (see section 3.3.3.2).
- Note: In the future an OPTIONAL Modify-Job or Set-Job-Attributes operation may be specified that allows the client to modify other attributes before releasing the restarted job.

### 2302 4. Object Attributes

This section describes the attributes with their corresponding attribute syntaxes and values that are part of the IPP model. The sections below show the objects and their associated attributes which are included within the scope of this protocol. Many of these attributes are derived from other relevant documents:

- Document Printing Application (DPA) [ISO10175]
- RFC 1759 Printer MIB [RFC1759]

2308

Each attribute is uniquely identified in this document using a "keyword" (see section 12.2.1) which is the name of the attribute. The keyword is included in the section header describing that attribute.

Note: Not only are keywords used to identify attributes, but one of the attribute syntaxes described below is "keyword" so that some attributes have keyword values. Therefore, these attributes are defined as having an attribute syntax that is a set of keywords.

# 4.1 Attribute Syntaxes

2314

- This section defines the basic attribute syntax types that all clients and IPP objects MUST be able to accept
- in responses and accept in requests, respectively. Each attribute description in sections 3 and 4 includes the
- name of attribute syntax(es) in the heading (in parentheses). A conforming implementation of an attribute
- 2318 MUST include the semantics of the attribute syntax(es) so identified. Section 6.3 describes how the
- protocol can be extended with new attribute syntaxes.
- The attribute syntaxes are specified in the following sub-sections, where the sub-section heading is the
- keyword name of the attribute syntax inside the single quotes. In operation requests and responses each
- 2322 attribute value MUST be represented as one of the attribute syntaxes specified in the sub-section heading
- for the attribute. In addition, the value of an attribute in a response (but not in a request) MAY be one of
- the "out-of-band" values whose special encoding rules are defined in the "Encoding and Transport"
- document [IPP-PRO]. Standard "out-of-band" values are: Issue 12 and Issue 15
- 2326 'unknown': The attribute is supported by the IPP object, but the value is unknown to the IPP object for some reason.
- 2328 'unsupported': The attribute is unsupported by the IPP object. This value MUST be returned only as the value of an attribute in the Unsupported Attributes Group.
- 2330 'no-value': The attribute is supported by the Printer object, but the administrator has not yet configured a value.
- All attributes in a request MUST have one or more values as defined in Sections 4.2 to 4.4. Thus clients
- 2334 MUST NOT supply attributes with "out-of-band" values. All attributes in a response MUST have one or
- more values as defined in Sections 4.2 to 4.4 or a single "out-of-band" value.
- 2336 Most attributes are defined to have a single attribute syntax. However, a few attributes (e.g., "job-sheet",
- "media", "job-hold-until") are defined to have several attribute syntaxes, depending on the value. These
- multiple attribute syntaxes are separated by the "|" character in the sub-section heading to indicate the
- choice. Since each value MUST be tagged as to its attribute syntax in the protocol, a single-valued attribute
- instance may have any one of its attribute syntaxes and a multi-valued attribute instance may have a mixture
- of its defined attribute syntaxes.
- 2342 4.1.1 'text'
- A text attribute is an attribute whose value is a sequence of zero or more characters encoded in a maximum
- of 1023 ('MAX') octets. MAX is the maximum length for each value of any text attribute. However, if an
- 2345 attribute will always contain values whose maximum length is much less than MAX, the definition of that
- 2346 attribute will include a qualifier that defines the maximum length for values of that attribute. For example:
- 2347 the "printer-location" attribute is specified as "printer-location (text(127))". In this case, text values for
- "printer-location" MUST NOT exceed 127 octets; if supplied with a longer text string via some external
- interface (other than the protocol), implementations are free to truncate to this shorter length limitation.
- In this document, all text attributes are defined using the 'text' syntax. However, 'text' is used only for
- brevity; the formal interpretation of 'text' is: 'textWithoutLanguage | textWithLanguage'. That is, for any

- 2352 attribute defined in this document using the 'text' attribute syntax, all IPP objects and clients MUST support
- both the 'textWithoutLanguage' and 'textWithLanguage' attribute syntaxes. However, in actual usage and
- protocol execution, objects and clients accept and return only one of the two syntax per attribute. The
- syntax 'text' never appears "on-the-wire".
- Both 'textWithoutLanguage' and 'textWithLanguage' are needed to support the real world needs of
- interoperability between sites and systems that use different natural languages as the basis for human
- communication. Generally, one natural language applies to all text attributes in a given request or response.
- The language is indicated by the "attributes-natural-language" operation attribute defined in section 3.1.4 or
- "attributes-natural-language" job attribute defined in section 4.3.20, and there is no need to identify the
- natural language for each text string on a value-by-value basis. In these cases, the attribute syntax
- 2362 'textWithoutLanguage' is used for text attributes. In other cases, the client needs to supply or the Printer
- object needs to return a text value in a natural language that is different from the rest of the text values in
- the request or response. In these cases, the client or Printer object uses the attribute syntax
- 2365 'textWithLanguage' for text attributes (this is the Natural Language Override mechanism described in
- 2366 section 3.1.4).
- The 'textWithoutLanguage' and 'textWithLanguage' attribute syntaxes are described in more detail in the
- following sections.
- 2369 4.1.1.1 'textWithoutLanguage'
- The 'textWithoutLanguage' syntax indicates a value that is sequence of zero or more characters. Text
- strings are encoded using the rules of some charset. The Printer object MUST support the UTF-8 charset
- 2372 [RFC2279] and MAY support additional charsets to represent 'text' values, provided that the charsets are
- registered with IANA [IANA-CS]. See Section 4.1.7 for the definition of the 'charset' attribute syntax,
- including restricted semantics and examples of charsets.
- 2375 4.1.1.2 'textWithLanguage'
- The 'textWithLanguage' attribute syntax is a compound attribute syntax consisting of two parts: a
- 2377 'textWithoutLanguage' part plus an additional 'naturalLanguage' (see section 4.1.8) part that overrides the
- 2378 natural language in force. The 'naturalLanguage' part explicitly identifies the natural language that applies
- to the text part of that value and that value alone. For any give text attribute, the 'textWithoutLanguage' part
- is limited to the maximum length defined for that attribute, but the 'naturalLanguage' part is always limited
- to 63 octets. Using the 'textWithLanguage' attribute syntax rather than the normal 'textWithoutLanguage'
- syntax is the so-called Natural Language Override mechanism and MUST be supported by all IPP objects
- 2383 and clients.
- If the attribute is multi-valued (1setOf text), then the 'textWithLanguage' attribute syntax MUST be used to
- explicitly specify each attribute value whose natural language needs to be overridden. Other values in a
- multi-valued 'text' attribute in a request or a response revert to the natural language of the operation
- 2387 attribute.
- In a create request, the Printer object MUST accept and store with the Job object any natural language in the
- "attributes-natural-language" operation attribute, whether the Printer object supports that natural language

- or not. Furthermore, the Printer object MUST accept and store any 'textWithLanguage' attribute value,
- whether the Printer object supports that natural language or not. These requirements are independent of the
- value of the "ipp-attribute-fidelity" operation attribute that the client MAY supply.
- Example: If the client supplies the "attributes-natural-language" operation attribute with the value: 'en'
- indicating English, but the value of the "job-name" attribute is in French, the client MUST use the
- 2395 'textWithLanguage' attribute syntax with the following two values:
- 2396 'fr': Natural Language Override indicating French
- 2397 'Rapport Mensuel': the job name in French
- 2398
- See the "Encoding and Transport" document [IPP-PRO] for a detailed example of the 'textWithLanguage'
- 2400 attribute syntax.
- 2401 4.1.2 'name'
- This syntax type is used for user-friendly strings, such as a Printer name, that, for humans, are more
- meaningful than identifiers. Names are never translated from one natural language to another. The 'name'
- 2404 attribute syntax is essentially the same as 'text', including the REQUIRED support of UTF-8 except that the
- sequence of characters is limited so that its encoded form MUST NOT exceed 255 (MAX) octets.
- Also like 'text', 'name' is really an abbreviated notation for either 'nameWithoutLanguage' or
- 2407 'nameWithLanguage'. That is, all IPP objects and clients MUST support both the 'nameWithoutLanguage'
- and 'nameWithLanguage' attribute syntaxes. However, in actual usage and protocol execution, objects and
- clients accept and return only one of the two syntax per attribute. The syntax 'name' never appears "on-the-
- 2410 wire".
- Only the 'text' and 'name' attribute syntaxes permit the Natural Language Override mechanism.
- Some attributes are defined as 'type3 keyword | name'. These attributes support values that are either type3
- 2413 keywords or names. This dual-syntax mechanism enables a site administrator to extend these attributes to
- legally include values that are locally defined by the site administrator. Such names are not registered with
- 2415 IANA.
- 2416 4.1.2.1 'nameWithoutLanguage'
- The nameWithoutLanguage' syntax indicates a value that is sequence of zero or more characters so that its
- encoded form does not exceed MAX octets.
- 2419 4.1.2.2 'nameWithLanguage'
- The 'nameWithLanguage' attribute syntax is a compound attribute syntax consisting of two parts: a
- 'nameWithoutLanguage' part plus an additional 'naturalLanguage' (see section 4.1.8) part that overrides the
- natural language in force. The 'naturalLanguage' part explicitly identifies the natural language that applies
- to that name value and that name value alone.

- The 'nameWithLanguage' attribute syntax behaves the same as the 'textWithLanguage' syntax. If a name is in a language that is different than the rest of the object or operation, then this 'nameWithLanguage' syntax is used rather than the generic 'nameWithoutLanguage' syntax.
- Example: If the client supplies the "attributes-natural-language" operation attribute with the value: 'en' indicating English, but the "printer-name" attribute is in German, the client MUST use the 'nameWithLanguage' attribute syntax as follows:
- 'de': Natural Language Override indicating German'Farbdrucker': the Printer name in German

2433

2437

2438

2439

2440

2441

2442

2443

2444

2445

2446

- 4.1.2.3 Matching 'name' attribute values
- For purposes of matching two 'name' attribute values for equality, such as in job validation (where a clientsupplied value for attribute "xxx" is checked to see if the value is among the values of the Printer object's corresponding "xxx-supported" attribute), the following match rules apply:
  - 1. 'keyword' values never match 'name' values.
  - 2. 'name' (nameWithoutLanguage and nameWithLanguage) values match if (1) the name parts match and (2) the Associated Natural-Language parts (see section 3.1.4.1) match. The matching rules are:
    - a. the name parts match if the two names are identical character by character, except it is RECOMMENDED that case be ignored. For example: 'Ajax-letter-head-white' MUST match 'Ajax-letter-head-white' and SHOULD match 'ajax-letter-head-white' and 'AJAX-LETTER-HEAD-WHITE'.
    - b. the Associated Natural-Language parts match if the shorter of the two meets the syntactic requirements of RFC 1766 [RFC1766] and matches byte for byte with the longer. For example, 'en' matches 'en', 'en-us' and 'en-gb', but matches neither 'fr' nor 'e'.
- 2448 4.1.3 'keyword'
- The 'keyword' attribute syntax is a sequence of characters, length: 1 to 255, containing only the US-ASCII
- 2450 [ASCII] encoded values for lowercase letters ("a" "z"), digits ("0" "9"), hyphen ("-"), dot ("."), and
- underscore ("\_"). The first character MUST be a lowercase letter. Furthermore, keywords MUST be in
- 2452 U.S. English.
- This syntax type is used for enumerating semantic identifiers of entities in the abstract protocol, i.e., entities
- identified in this document. Keywords are used as attribute names or values of attributes. Unlike 'text' and
- 2455 'name' attribute values, 'keyword' values MUST NOT use the Natural Language Override mechanism, since
- 2456 they MUST always be US-ASCII and U.S. English.
- Keywords are for use in the protocol. A user interface will likely provide a mapping between protocol
- 2458 keywords and displayable user-friendly words and phrases which are localized to the natural language of

- the user. While the keywords specified in this document MAY be displayed to users whose natural
- language is U.S. English, they MAY be mapped to other U.S. English words for U.S. English users, since
- the user interface is outside the scope of this document.
- In the definition for each attribute of this syntax type, the full set of defined keyword values for that
- 2463 attribute are listed.
- When a keyword is used to represent an attribute (its name), it MUST be unique within the full scope of all
- 2465 IPP objects and attributes. When a keyword is used to represent a value of an attribute, it MUST be unique
- just within the scope of that attribute. That is, the same keyword MUST NOT be used for two different
- values within the same attribute to mean two different semantic ideas. However, the same keyword MAY
- be used across two or more attributes, representing different semantic ideas for each attribute. Section 6.1
- describes how the protocol can be extended with new keyword values. Examples of attribute name
- 2470 keywords:

- "job-name"
- "attributes-charset"
- Note: This document uses "type1", "type2", and "type3" prefixes to the "keyword" basic syntax to indicate
- 2475 different levels of review for extensions (see section 6.1).
- 2476 4.1.4 'enum'
- The 'enum' attribute syntax is an enumerated integer value that is in the range from 1 to  $2^{**}31 1$  (MAX).
- Each value has an associated 'keyword' name. In the definition for each attribute of this syntax type, the full
- set of possible values for that attribute are listed. This syntax type is used for attributes for which there are
- enum values assigned by other standards, such as SNMP MIBs. A number of attribute enum values in this
- document are also used for corresponding attributes in other standards [RFC1759]. This syntax type is not
- used for attributes to which the administrator may assign values. Section 6.1 describes how the protocol
- can be extended with new enum values.
- Enum values are for use in the protocol. A user interface will provide a mapping between protocol enum
- values and displayable user-friendly words and phrases which are localized to the natural language of the
- user. While the enum symbols specified in this document MAY be displayed to users whose natural
- language is U.S. English, they MAY be mapped to other U.S. English words for U.S. English users, since
- the user interface is outside the scope of this document.
- Note: SNMP MIBs use '2' for 'unknown' which corresponds to the IPP "out-of-band" value 'unknown'. See
- the description of the "out-of-band" values at the beginning of Section 4.1. Therefore, attributes of type
- 2491 'enum' start at '3'.
- Note: This document uses "type1", "type2", and "type3" prefixes to the "enum" basic syntax to indicate
- 2493 different levels of review for extensions (see section 6.1).

- 4.1.5 'uri' 2494
- The 'uri' attribute syntax is any valid Uniform Resource Identifier or URI [RFC2396]. Most often, URIs are 2495
- simply Uniform Resource Locators or URLs. The maximum length of URIs used as values of IPP 2496
- attributes is 1023 octets. Although most other IPP attribute syntax types allow for only lower-cased values, 2497
- this attribute syntax type conforms to the case-sensitive and case-insensitive rules specified in [RFC2396]. 2498
- See also [IPP-IIG] for a discussion of case in URIs. 2499
- 4.1.6 'uriScheme' 2500
- The 'uriScheme' attribute syntax is a sequence of characters representing a URI scheme according to RFC 2501
- 2396 [RFC2396]. Though RFC 2396 requires that the values be case-insensitive, IPP requires all lower 2502
- case values in IPP attributes to simplify comparing by IPP clients and Printer objects. 2503
- Standard values for this syntax type are the following keywords: 2504
- "ipp": for IPP schemed URIs (e.g., "ipp:...") 2505
- 'http': for HTTP schemed URIs (e.g., "http:...") 2506
- 'https': for use with HTTPS schemed URIs (e.g., "https:...") (not on IETF standards track) 2507
- 'ftp': for FTP schemed URIs (e.g., "ftp:...") 2508
- 'mailto': for SMTP schemed URIs (e.g., "mailto:...") 2509
- 'file': for file schemed URIs (e.g., "file:...") 2510
- 2511
- A Printer object MAY support any URI 'scheme' that has been registered with IANA [IANA-MT]. The 2512
- maximum length of URI 'scheme' values used to represent IPP attribute values is 63 octets. 2513
- 4.1.7 'charset' 2514
- The 'charset' attribute syntax is a standard identifier for a charset. A charset is a coded character set and 2515
- encoding scheme. Charsets are used for labeling certain document contents and 'text' and 'name' attribute 2516
- values. The syntax and semantics of this attribute syntax are specified in RFC 2046 [RFC2046] and 2517
- contained in the IANA character-set Registry [IANA-CS] according to the IANA procedures [RFC2278]. 2518
- Though RFC 2046 requires that the values be case-insensitive US-ASCII, IPP requires all lower case values 2519
- in IPP attributes to simplify comparing by IPP clients and Printer objects. When a character-set in the 2520
- IANA registry has more than one name (alias), the name labeled as "(preferred MIME name)", if present, 2521
- MUST be used. 2522
- The maximum length of 'charset' values used to represent IPP attribute values is 63 octets. 2523
- Some examples are: 2524
- 'utf-8': ISO 10646 Universal Multiple-Octet Coded Character Set (UCS) represented as the UTF-8 2525
- [RFC2279] transfer encoding scheme in which US-ASCII is a subset charset. 2526
- 'us-ascii': 7-bit American Standard Code for Information Interchange (ASCII), ANSI X3.4-1986 2527
- [ASCII]. That standard defines US-ASCII, but RFC 2045 [RFC2045] eliminates most of the control 2528
- characters from conformant usage in MIME and IPP. 2529

```
iso-8859-1: 8-bit One-Byte Coded Character Set, Latin Alphabet Nr 1 [ISO8859-1]. That standard
2530
              defines a coded character set that is used by Latin languages in the Western Hemisphere and
2531
              Western Europe. US-ASCII is a subset charset.
2532
           "iso-10646-ucs-2": ISO 10646 Universal Multiple-Octet Coded Character Set (UCS) represented as two
2533
              octets (UCS-2), with the high order octet of each pair coming first (so-called Big Endian integer).
2534
2535
       Some attribute descriptions MAY place additional requirements on charset values that may be used, such as
2536
       REQUIRED values that MUST be supported or additional restrictions, such as requiring that the charset
2537
       have US-ASCII as a subset charset.
2538
       4.1.8 'naturalLanguage'
2539
       The 'naturalLanguage' attribute syntax is a standard identifier for a natural language and optionally a
2540
       country. The values for this syntax type are defined by RFC 1766 [RFC1766]. Though RFC 1766 requires
2541
       that the values be case-insensitive US-ASCII, IPP requires all lower case to simplify comparing by IPP
2542
       clients and Printer objects. Examples include:
2543
           'en': for English
2544
           'en-us': for US English
2545
           'fr': for French
2546
           'de': for German
2547
2548
       The maximum length of 'naturalLanguage' values used to represent IPP attribute values is 63 octets.
2549
       4.1.9 'mimeMediaType'
2550
       The 'mimeMediaType' attribute syntax is the Internet Media Type (sometimes called MIME type) as
2551
       defined by RFC 2046 [RFC2046] and registered according to the procedures of RFC 2048 [RFC2048] for
2552
       identifying a document format. The value MAY include a charset parameter, depending on the
2553
       specification of the Media Type in the IANA Registry [IANA-MT]. Although most other IPP syntax types
2554
       allow for only lower-cased values, this syntax type allows for mixed-case values which are case-insensitive.
2555
       Examples are:
2556
           'text/html': An HTML document
2557
           'text/plain': A plain text document in US-ASCII (RFC 2046 indicates that in the absence of the charset
2558
              parameter MUST mean US-ASCII rather than simply unspecified) [RFC2046].
2559
           'text/plain; charset=US-ASCII': A plain text document in US-ASCII [52, 56].
2560
           'text/plain; charset=ISO-8859-1': A plain text document in ISO 8859-1 (Latin 1) [ISO8859-1].
2561
```

deBry, Hastings, Herriot, Isaacson, Powell

document data)

'application/postscript': A PostScript document [RFC2046]

'application/octet-stream': Auto-sense - see section 4.1.9.1

2562

2563

2564

2565

2566

2567

[Page 69]

'text/plain; charset=utf-8': A plain text document in ISO 10646 represented as UTF-8 [RFC2279]

'application/pdf': Portable Document Format - see IANA MIME Media Type registry

'application/vnd.hp-PCL': A PCL document [IANA-MT] (charset escape sequence embedded in the

4.1.9.1 Application/octet-stream -- Auto-Sensing the document format

One special type is 'application/octet-stream'. If the Printer object supports this value, the Printer object MUST be capable of auto-sensing the format of the document data, either as part of the create operation and/or at document processing time. During auto-sensing, a Printer may determine that the document-data has a format that the Printer doesn't recognize. If the Printer determines this problem before returning an operation response, it rejects the request and returns the 'client-error-document-format-not-supported' status code. If the Printer determines this problem after accepting the request and returning an operation response with one of the successful status codes, the Printer adds the 'unsupported-document-format' value to the job's "job-state-reasons" attribute. Issue 9 and Issue 10

If the Printer object's default value attribute "document-format-default" is set to 'application/octet-stream', the Printer object not only supports auto-sensing of the document format, but will depend on the result of applying its auto-sensing when the client does not supply the "document-format" attribute. If the client supplies a document format value, the Printer MUST rely on the supplied attribute, rather than trust its auto-sensing algorithm. To summarize:

- 1. If the client does not supply a document format value, the Printer MUST rely on its default value setting (which may be 'application/octet-stream' indicating an auto-sensing mechanism).
- 2. If the client supplies a value other than 'application/octet-stream', the client is supplying valid information about the format of the document data and the Printer object MUST trust the client supplied value more than the outcome of applying an automatic format detection mechanism. For example, the client may be requesting the printing of a PostScript file as a 'text/plain' document. The Printer object MUST print a text representation of the PostScript commands rather than interpret the stream of PostScript commands and print the result.
- 3. If the client supplies a value of 'application/octet-stream', the client is indicating that the Printer object MUST use its auto-sensing mechanism on the client supplied document data whether auto-sensing is the Printer object's default or not.

Note: Since the auto-sensing algorithm is probabilistic, if the client requests both auto-sensing ("document-format" set to 'application/octet-stream') and true fidelity ("ipp-attribute-fidelity" set to 'true'), the Printer object might not be able to guarantee exactly what the end user intended (the auto-sensing algorithm might mistake one document format for another), but it is able to guarantee that its auto-sensing mechanism be used.

The maximum length of a 'mimeMediaType' value to represent IPP attribute values is 255 octets.

4.1.10 'octetString'

The 'octetString' attribute syntax is a sequence of octets encoded in a maximum of 1023 octets which is indicated in sub-section headers using the notation: octetString(MAX). This syntax type is used for opaque data.

- 2605 4.1.11 'boolean'
- The 'boolean' attribute syntax has only two values: 'true' and 'false'.
- 2607 4.1.12 'integer'
- The 'integer' attribute syntax is an integer value that is in the range from -2\*\*31 (MIN) to 2\*\*31 1 (MAX).
- Each individual attribute may specify the range constraint explicitly in sub-section headers if the range is
- 2610 different from the full range of possible integer values. For example: job-priority (integer(1:100)) for the
- 2611 "job-priority" attribute. However, the enforcement of that additional constraint is up to the IPP objects, not
- 2612 the protocol.
- 2613 4.1.13 'rangeOfInteger'
- The 'rangeOfInteger' attribute syntax is an ordered pair of integers that defines an inclusive range of integer
- values. The first integer specifies the lower bound and the second specifies the upper bound. If a range
- 2616 constraint is specified in the header description for an attribute in this document whose attribute syntax is
- 2617 'rangeOfInteger' (i.e., 'X:Y' indicating X as a minimum value and Y as a maximum value), then the
- 2618 constraint applies to both integers.
- 2619 4.1.14 'dateTime'
- The 'dateTime' attribute syntax is a standard, fixed length, 11 octet representation of the "DateAndTime"
- syntax as defined in RFC 2579 [RFC2579]. RFC 2579 also identifies an 8 octet representation of a
- "DateAndTime" value, but IPP objects MUST use the 11 octet representation. A user interface will provide
- 2623 a mapping between protocol dateTime values and displayable user-friendly words or presentation values
- and phrases which are localized to the natural language and date format of the user, including time zone.
- 2625 4.1.15 'resolution'
- The 'resolution' attribute syntax specifies a two-dimensional resolution in the indicated units. It consists of
- 3 values: a cross feed direction resolution (positive integer value), a feed direction resolution (positive
- integer value), and a units value. The semantics of these three components are taken from the Printer MIB
- 2629 [RFC1759] suggested values. That is, the cross feed direction component resolution component is the same
- as the prtMarkerAddressabilityXFeedDir object in the Printer MIB, the feed direction component resolution
- component is the same as the prtMarkerAddressabilityFeedDir in the Printer MIB, and the units component
- is the same as the prtMarkerAddressabilityUnit object in the Printer MIB (namely, 3' indicates dots per inch
- and '4' indicates dots per centimeter). All three values MUST be present even if the first two values are the
- same. Example: '300', '600', '3' indicates a 300 dpi cross-feed direction resolution, a 600 dpi feed direction
- resolution, since a 3' indicates dots per inch (dpi).
- 2636 4.1.16 '1setOf X'
- The '1setOf X' attribute syntax is 1 or more values of attribute syntax type X. This syntax type is used for
- 2638 multi-valued attributes. The syntax type is called '1setOf' rather than just 'setOf' as a reminder that the set

of values MUST NOT be empty (i.e., a set of size 0). Sets are normally unordered. However each attribute description of this type may specify that the values MUST be in a certain order for that attribute.

4.2 Job Template Attributes

Job Template attributes describe job processing behavior. Support for Job Template attributes by a Printer object is OPTIONAL (see section 12.2.3 for a description of support for OPTIONAL attributes). Also, clients OPTIONALLY supply Job Template attributes in create requests.

Job Template attributes conform to the following rules. For each Job Template attribute called "xxx":

- 1. If the Printer object supports "xxx" then it MUST support both a "xxx-default" attribute (unless there is a "No" in the table below) and a "xxx-supported" attribute. If the Printer object doesn't support "xxx", then it MUST support neither an "xxx-default" attribute nor an "xxx-supported" attribute, and it MUST treat an attribute "xxx" supplied by a client as unsupported. An attribute "xxx" may be supported for some document formats and not supported for other document formats. For example, it is expected that a Printer object would only support "orientation-requested" for some document formats (such as 'text/plain' or 'text/html') but not others (such as 'application/postscript').
- 2. "xxx" is OPTIONALLY supplied by the client in a create request. If "xxx" is supplied, the client is indicating a desired job processing behavior for this Job. When "xxx" is not supplied, the client is indicating that the Printer object apply its default job processing behavior at job processing time if the document content does not contain an embedded instruction indicating an xxx-related behavior.
  - Since an administrator MAY change the default value attribute after a Job object has been submitted but before it has been processed, the default value used by the Printer object at job processing time may be different that the default value in effect at job submission time.
- 3. The "xxx-supported" attribute is a Printer object attribute that describes which job processing behaviors are supported by that Printer object. A client can query the Printer object to find out what xxx-related behaviors are supported by inspecting the returned values of the "xxx-supported" attribute.

Note: The "xxx" in each "xxx-supported" attribute name is singular, even though an "xxx-supported" attribute usually has more than one value, such as "job-sheet-supported", unless the "xxx" Job Template attribute is plural, such as "finishings" or "sides". In such cases the "xxx-supported" attribute names are: "finishings-supported" and "sides-supported".

4. The "xxx-default" default value attribute describes what will be done at job processing time when no other job processing information is supplied by the client (either explicitly as an IPP attribute in the create request or implicitly as an embedded instruction within the document data).

If an application wishes to present an end user with a list of supported values from which to choose, the application SHOULD query the Printer object for its supported value attributes. The application SHOULD also query the default value attributes. If the application then limits selectable values to only those value

2694

2695

2696

2697

2698

2699

2700

that are supported, the application can guarantee that the values supplied by the client in the create request all fall within the set of supported values at the Printer. When querying the Printer, the client MAY enumerate each attribute by name in the Get-Printer-Attributes Request, or the client MAY just name the "job-template" group in order to get the complete set of supported attributes (both supported and default attributes).

The "finishings" attribute is an example of a Job Template attribute. It can take on a set of values such as 2685 'staple', 'punch', and/or 'cover'. A client can query the Printer object for the "finishings-supported" attribute 2686 and the "finishings-default" attribute. The supported attribute contains a set of supported values. The 2687 default value attribute contains the finishing value(s) that will be used for a new Job if the client does not 2688 supply a "finishings" attribute in the create request and the document data does not contain any 2689 corresponding finishing instructions. If the client does supply the "finishings" attribute in the create 2690 request, the IPP object validates the value or values to make sure that they are a subset of the supported 2691 values identified in the Printer object's "finishings-supported" attribute. See section 3.1.7. 2692

The table below summarizes the names and relationships for all Job Template attributes. The first column of the table (labeled "Job Attribute") shows the name and syntax for each Job Template attribute in the Job object. These are the attributes that can optionally be supplied by the client in a create request. The last two columns (labeled "Printer: Default Value Attribute" and "Printer: Supported Values Attribute") shows the name and syntax for each Job Template attribute in the Printer object (the default value attribute and the supported values attribute). A "No" in the table means the Printer MUST NOT support the attribute (that is, the attribute is simply not applicable). For brevity in the table, the 'text' and 'name' entries do not show the maximum length for each attribute.

Job Attribute	Printer: Default Value Attribute	Printer: Supported Values Attribute
job-priority   (integer 1:100)	job-priority-default (integer 1:100)	job-priority-supported   (integer 1:100)
job-hold-until (type3 keyword     name)	job-hold-until- default (type3 keyword   name)	job-hold-until-   supported   (1setOf (   type3 keyword   name))
job-sheets (type3 keyword     name)	job-sheets-default (type3 keyword   name)	job-sheets-supported  (1setOf (  type3 keyword   name))
multiple-document-   handling   (type2 keyword)	multiple-document- handling-default (type2 keyword)	multiple-document- handling-supported (1setOf type2 keyword)
copies (integer (1:MAX))	copies-default (integer (1:MAX))	copies-supported (rangeOfInteger (1:MAX))
finishings (1setOf type2 enum)	finishings-default (1setOf type2 enum)	finishings-supported (1setOf type2 enum)
page-ranges (1setOf rangeOfInteger (1:MAX))	No	page-ranges-   supported (boolean)
sides   (type2 keyword)	sides-default (type2 keyword)	sides-supported  (1setOf type2 keyword)
number-up (integer (1:MAX))	number-up-default (integer (1:MAX))	number-up-supported  (1setOf integer   (1:MAX)     rangeOfInteger   (1:MAX))
orientation-   requested   (type2 enum)	orientation-requested- default (type2 enum)	orientation-requested- supported (1setOf type2 enum)
media   (type3 keyword     name)	media-default (type3 keyword   name)	media-supported  (1setOf (  type3 keyword   name))     media-ready

2764

2776

2777

2778

2779

2780

2751 2752			(1setOf ( type3 keyword   name))
2753 2754	printer-resolution	printer-resolution-	printer-resolution-
2754	(resolution)	default	supported
2756	(lesolucion)	(resolution)	(1setOf resolution)
2750		(resolución)	(isecol resolucion)
-	print-quality	print-quality-default	print-quality-
2758	! !		!
2759	(type2 enum)	(type2 enum)	supported
2760			(1setOf type2 enum)
2761	++		++

4.2.1 job-priority (integer(1:100))

This attribute specifies a priority for scheduling the Job. A higher value specifies a higher priority. The value 1 indicates the lowest possible priority. The value 100 indicates the highest possible priority. Among those jobs that are ready to print, a Printer MUST print all jobs with a priority value of n before printing those with a priority value of n-1 for all n.

If the Printer object supports this attribute, it MUST always support the full range from 1 to 100. No administrative restrictions are permitted. This way an end-user can always make full use of the entire range with any Printer object. If privileged jobs are implemented outside IPP/1.1, they MUST have priorities higher than 100, rather than restricting the range available to end-users.

If the client does not supply this attribute and this attribute is supported by the Printer object, the Printer object MUST use the value of the Printer object's "job-priority-default" at job submission time (unlike most Job Template attributes that are used if necessary at job processing time).

The syntax for the "job-priority-supported" is also integer(1:100). This single integer value indicates the number of priority levels supported. The Printer object MUST take the value supplied by the client and map it to the closest integer in a sequence of n integers values that are evenly distributed over the range from 1 to 100 using the formula:

roundToNearestInt((100x+50)/n)

where n is the value of "job-priority-supported" and x ranges from 0 through n-1.

For example, if n=1 the sequence of values is 50; if n=2, the sequence of values is: 25 and 75; if n=3, the sequence of values is: 17, 50 and 83; if n=10, the sequence of values is: 5, 15, 25, 35, 45, 55, 65, 75, 85, and 95; if n=100, the sequence of values is: 1, 2, 3, ... 100.

If the value of the Printer object's "job-priority-supported" is 10 and the client supplies values in the range 1 to 10, the Printer object maps them to 5, in the range 11 to 20, the Printer object maps them to 15, etc.

- 4.2.2 job-hold-until (type3 keyword | name (MAX))
- This attribute specifies the named time period during which the Job MUST become a candidate for printing.
- 2789 Standard keyword values for named time periods are:
- 2790 'no-hold': immediately, if there are not other reasons to hold the job
- "indefinite': the job is held indefinitely, until a client performs a Release-Job (section 3.3.6)
- 2792 'day-time': during the day
- 2793 'evening': evening
- 2794 'night': night
- 2795 'weekend': weekend
- 'second-shift': second-shift (after close of business)
- 2797 'third-shift': third-shift (after midnight)

- An administrator MUST associate allowable print times with a named time period (by means outside the scope of this IPP/1.1 document). An administrator is encouraged to pick names that suggest the type of time period. An administrator MAY define additional values using the 'name' or 'keyword' attribute syntax,
- 2802 depending on implementation.
- 2803 If the value of this attribute specifies a time period that is in the future, the Printer SHOULD add the job-
- 2804 hold-until-specified' value to the job's "job-state-reasons" attribute, MUST move the job to the 'pending-
- 2805 held' state, and MUST NOT schedule the job for printing until the specified time-period arrives.
- 2806 When the specified time period arrives, the Printer MUST remove the 'job-hold-until-specified' value from
- the job's "job-state-reason" attribute, if present. If there are no other job state reasons that keep the job in
- the 'pending-held' state, the Printer MUST consider the job as a candidate for processing by moving the job
- to the 'pending' state. Issue 30
- If this job attribute value is the named value 'no-hold', or the specified time period has already started, the
- job MUST be a candidate for processing immediately.
- If the client does not supply this attribute and this attribute is supported by the Printer object, the Printer
- object MUST use the value of the Printer object's "job-hold-until-default" at job submission time (unlike
- most Job Template attributes that are used if necessary at job processing time).
- 2815 4.2.3 job-sheets (type3 keyword | name(MAX))
- This attribute determines which job start/end sheet(s), if any, MUST be printed with a job.
- 2817 Standard keyword values are:
- 2818 'none': no job sheet is printed
- 2819 'standard': one or more site specific standard job sheets are printed, e.g. a single start sheet or both start
- and end sheet is printed

- An administrator MAY define additional values using the 'name' or 'keyword' attribute syntax, depending on implementation.
- The effect of this attribute on jobs with multiple documents MAY be affected by the "multiple-document-handling" job attribute (section 4.2.4), depending on the job sheet semantics.
  - 4.2.4 multiple-document-handling (type2 keyword)

This attribute is relevant only if a job consists of two or more documents. This attribute MUST be supported if the Printer supports multiple documents per job (see sections 3.2.4 and 3.3.1). Issue 34 The attribute controls finishing operations and the placement of one or more print-stream pages into impressions and onto media sheets. When the value of the "copies" attribute exceeds 1, it also controls the order in which the copies that result from processing the documents are produced. For the purposes of this explanations, if "a" represents an instance of document data, then the result of processing the data in document "a" is a sequence of media sheets represented by "a(\*)".

### Standard keyword values are:

'single-document': If a Job object has multiple documents, say, the document data is called a and b, then the result of processing all the document data (a and then b) MUST be treated as a single sequence of media sheets for finishing operations; that is, finishing would be performed on the concatenation of the sequences a(\*),b(\*). The Printer object MUST NOT force the data in each document instance to be formatted onto a new print-stream page, nor to start a new impression on a new media sheet. If more than one copy is made, the ordering of the sets of media sheets resulting from processing the document data MUST be a(\*), b(\*), a(\*), b(\*), ..., and the Printer object MUST force each copy (a(\*),b(\*)) to start on a new media sheet.

'separate-documents-uncollated-copies': If a Job object has multiple documents, say, the document data is called a and b, then the result of processing the data in each document instance MUST be treated as a single sequence of media sheets for finishing operations; that is, the sets a(\*) and b(\*) would each be finished separately. The Printer object MUST force each copy of the result of processing the data in a single document to start on a new media sheet. If more than one copy is made, the ordering of the sets of media sheets resulting from processing the document data MUST be a(\*), a(\*), ..., b(\*), b(\*) ....

'separate-documents-collated-copies': If a Job object has multiple documents, say, the document data is called a and b, then the result of processing the data in each document instance MUST be treated as a single sequence of media sheets for finishing operations; that is, the sets a(\*) and b(\*) would each be finished separately. The Printer object MUST force each copy of the result of processing the data in a single document to start on a new media sheet. If more than one copy is made, the ordering of the sets of media sheets resulting from processing the document data MUST be a(\*), b(\*), a(\*), b(\*),

'single-document-new-sheet': Same as 'single-document', except that the Printer object MUST ensure that the first impression of each document instance in the job is placed on a new media sheet. This value allows multiple documents to be stapled together with a single staple where each document starts on a new sheet.

- The 'single-document' value is the same as 'separate-documents-collated-copies' with respect to ordering of 2862 print-stream pages, but not media sheet generation, since 'single-document' will put the first page of the 2863 next document on the back side of a sheet if an odd number of pages have been produced so far for the job, 2864 while 'separate-documents-collated-copies' always forces the next document or document copy on to a new 2865 sheet. In addition, if the "finishings" attribute specifies 'staple', then with 'single-document', documents a 2866 and b are stapled together as a single document with no regard to new sheets, with 'single-document-new-2867 sheet', documents a and b are stapled together as a single document, but document b starts on a new sheet, 2868 but with 'separate-documents-uncollated-copies' and 'separate-documents-collated-copies', documents a and 2869 b are stapled separately. 2870
- Note: None of these values provide means to produce uncollated sheets within a document, i.e., where multiple copies of sheet n are produced before sheet n+1 of the same document.
- The relationship of this attribute and the other attributes that control document processing is described in section 15.3.
- 2875 4.2.5 copies (integer(1:MAX))
- This attribute specifies the number of copies to be printed.
- On many devices the supported number of collated copies will be limited by the number of physical output bins on the device, and may be different from the number of uncollated copies which can be supported.
- Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-documenthandling" job attribute (section 4.2.4) and the relationship of this attribute and the other attributes that control document processing is described in section 15.3.
- 4.2.6 finishings (1setOf type2 enum)
- This attribute identifies the finishing operations that the Printer uses for each copy of each printed document in the Job. For Jobs with multiple documents, the "multiple-document-handling" attribute determines what constitutes a "copy" for purposes of finishing.
- 2886 Standard enum values are:

2887	Value	Symbolic Name and Description
2888		
2889	3'	'none': Perform no finishing
2890	'4'	'staple': Bind the document(s) with one or more staples. The exact number and placement of
2891		the staples is site-defined.
2892	'5'	'punch': This value indicates that holes are required in the finished document. The exact
2893		number and placement of the holes is site-defined The punch specification MAY be
2894		satisfied (in a site- and implementation-specific manner) either by drilling/punching,
2895		or by substituting pre-drilled media.

'cover': This value is specified when it is desired to select a non-printed (or pre-printed)

cover for the document. This does not supplant the specification of a printed cover

**6** 

2896

2897

2937

2938

2939

2097		cover for the document. This does not suppraint the specification of a printed cover
2898		(on cover stock medium) by the document itself.
2899	7'	bind': This value indicates that a binding is to be applied to the document; the type and
2900		placement of the binding is site-defined.
2901		
2902	'8'	'saddle-stitch': Bind the document(s) with one or more staples (wire stitches) along the
2903		middle fold. The exact number and placement of the staples and the middle fold is
2904		implementation and/or site-defined.
2905	<b>'</b> 9'	'edge-stitch': Bind the document(s) with one or more staples (wire stitches) along one edge.
2906		The exact number and placement of the staples is implementation and/or site-
2907		defined.
2908	'10'-'19'	reserved for future generic finishing enum values.
2909	The following	g values are more specific; they indicate a corner or an edge as if the document were a portrait
2910	document (see	•
	`	
2911	20'	'staple-top-left': Bind the document(s) with one or more staples in the top left corner.
2912	21'	'staple-bottom-left': Bind the document(s) with one or more staples in the bottom left
2913		corner.
2914	'22'	'staple-top-right': Bind the document(s) with one or more staples in the top right corner.
2915	23'	'staple-bottom-right': Bind the document(s) with one or more staples in the bottom right
2916		corner.
2917	'24'	'edge-stitch-left': Bind the document(s) with one or more staples (wire stitches) along the
2918		left edge. The exact number and placement of the staples is implementation and/or
2919		site-defined.
2920	'25'	'edge-stitch-top': Bind the document(s) with one or more staples (wire stitches) along the
2921		top edge. The exact number and placement of the staples is implementation and/or
2922		site-defined.
2923	26'	'edge-stitch-right': Bind the document(s) with one or more staples (wire stitches) along the
2924		right edge. The exact number and placement of the staples is implementation and/or
2925		site-defined.
2926	'27'	'edge-stitch-bottom': Bind the document(s) with one or more staples (wire stitches) along
2927		the bottom edge. The exact number and placement of the staples is implementation
2928		and/or site-defined.
2929	28'	'staple-dual-left': Bind the document(s) with two staples (wire stitches) along the left edge
2930	_0	assuming a portrait document (see above).
2931	'29'	'staple-dual-top': Bind the document(s) with two staples (wire stitches) along the top edge
2932	<b>-</b> /	assuming a portrait document (see above).
2932	'30'	'staple-dual-right': Bind the document(s) with two staples (wire stitches) along the right
2934	50	edge assuming a portrait document (see above).
2934 2935	31'	'staple-dual-bottom': Bind the document(s) with two staples (wire stitches) along the bottom
	J1	edge assuming a portrait document (see above).
2936		eage assuming a portrait document (see above).

document. If the document is actually a landscape or a reverse-landscape document, the client supplies the

The 'staple-xxx' values are specified with respect to the document as if the document were a portrait

appropriate transformed value. For example, to position a staple in the upper left hand corner of a

- landscape document when held for reading, the client supplies the 'staple-bottom-left' value (since
- landscape is defined as a +90 degree rotation from portrait, i.e., anti-clockwise). On the other hand, to
- 2942 position a staple in the upper left hand corner of a reverse-landscape document when held for reading, the
- client supplies the 'staple-top-right' value (since reverse-landscape is defined as a -90 degree rotation from
- portrait, i.e., clockwise).
- The angle (vertical, horizontal, angled) of each staple with respect to the document depends on the
- implementation which may in turn depend on the value of the attribute.
- Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-document-
- handling" job attribute (section 4.2.4) and the relationship of this attribute and the other attributes that
- 2949 control document processing is described in section 15.3.
- 2950 If the client supplies a value of 'none' along with any other combination of values, it is the same as if only
- 2951 that other combination of values had been supplied (that is the 'none' value has no effect).
- 2952 4.2.7 page-ranges (1setOf rangeOfInteger (1:MAX))
- This attribute identifies the range(s) of print-stream pages that the Printer object uses for each copy of each
- document which are to be printed. Nothing is printed for any pages identified that do not exist in the
- document(s). Ranges MUST be in ascending order, for example: 1-3, 5-7, 15-19 and MUST NOT overlap,
- so that a non-spooling Printer object can process the job in a single pass. If the ranges are not ascending or
- are overlapping, the IPP object MUST reject the request and return the 'client-error-bad-request' status code.
- The attribute is associated with print-stream pages not application-numbered pages (for example, the page
- numbers found in the headers and or footers for certain word processing applications).
- For Jobs with multiple documents, the "multiple-document-handling" attribute determines what constitutes
- a "copy" for purposes of the specified page range(s). When "multiple-document-handling" is 'single-
- document', the Printer object MUST apply each supplied page range once to the concatenation of the print-
- stream pages. For example, if there are 8 documents of 10 pages each, the page-range '41:60' prints the
- pages in the 5th and 6th documents as a single document and none of the pages of the other documents are
- printed. When "multiple-document-handling" is 'separate-documents-uncollated-copies' or 'separate-
- documents-collated-copies', the Printer object MUST apply each supplied page range repeatedly to each
- document copy. For the same job, the page-range '1:3, 10:10' would print the first 3 pages and the 10th
- page of each of the 8 documents in the Job, as 8 separate documents.
- In most cases, the exact pages to be printed will be generated by a device driver and this attribute would not
- be required. However, when printing an archived document which has already been formatted, the end user
- may elect to print just a subset of the pages contained in the document. In this case, if page-range = n.m is
- specified, the first page to be printed will be page n. All subsequent pages of the document will be printed
- through and including page m.
- "page-ranges-supported" is a boolean value indicating whether or not the printer is capable of supporting
- the printing of page ranges. This capability may differ from one PDL to another. There is no "page-ranges-
- default" attribute. If the "page-ranges" attribute is not supplied by the client, all pages of the document will
- be printed.

Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-documenthandling" job attribute (section 4.2.4) and the relationship of this attribute and the other attributes that control document processing is described in section 15.3.

4.2.8 sides (type2 keyword)

This attribute specifies how print-stream pages are to be imposed upon the sides of an instance of a selected medium, i.e., an impression.

2984 The standard keyword values are:

'one-sided': imposes each consecutive print-stream page upon the same side of consecutive media sheets.

'two-sided-long-edge': imposes each consecutive pair of print-stream pages upon front and back sides of consecutive media sheets, such that the orientation of each pair of print-stream pages on the medium would be correct for the reader as if for binding on the long edge. This imposition is sometimes called 'duplex' or 'head-to-head'.

'two-sided-short-edge': imposes each consecutive pair of print-stream pages upon front and back sides of consecutive media sheets, such that the orientation of each pair of print-stream pages on the medium would be correct for the reader as if for binding on the short edge. This imposition is sometimes called 'tumble' or 'head-to-toe'.

29942995

2996

2997

2998

3002

2985

2986

2987

2988

2989

2990

2991

2992

2993

'two-sided-long-edge', 'two-sided-short-edge', 'tumble', and 'duplex' all work the same for portrait or landscape. However 'head-to-toe' is 'tumble' in portrait but 'duplex' in landscape. 'head-to-head' also switches between 'duplex' and 'tumble' when using portrait and landscape modes.

Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-documenthandling" job attribute (section 4.2.4) and the relationship of this attribute and the other attributes that control document processing is described in section 15.3.

## 4.2.9 number-up (integer(1:MAX))

This attribute specifies the number of print-stream pages to impose upon a single side of an instance of a selected medium. For example, if the value is:

3005	Value	Description
3006		
3007	'1'	the Printer MUST place one print-stream page on a single side of an instance of the selected
3008		medium (MAY add some sort of translation, scaling, or rotation).
3009	2'	the Printer MUST place two print-stream pages on a single side of an instance of the selected
3010		medium (MAY add some sort of translation, scaling, or rotation).
3011	'4'	the Printer MUST place four print-stream pages on a single side of an instance of the
3012		selected medium (MAY add some sort of translation, scaling, or rotation).

3013 3014

This attribute primarily controls the translation, scaling and rotation of print-stream pages.

3019

3020

3021

3022

3023

3024

3025

3026

3027

3028

3029

3030

3031

3032

3054

Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-documenthandling" job attribute (section 4.2.4) and the relationship of this attribute and the other attributes that control document processing is described in section 15.3.

4.2.10 orientation-requested (type2 enum)

This attribute indicates the desired orientation for printed print-stream pages; it does not describe the orientation of the client-supplied print-stream pages.

For some document formats (such as 'application/postscript'), the desired orientation of the print-stream pages is specified within the document data. This information is generated by a device driver prior to the submission of the print job. Other document formats (such as 'text/plain') do not include the notion of desired orientation within the document data. In the latter case it is possible for the Printer object to bind the desired orientation to the document data after it has been submitted. It is expected that a Printer object would only support "orientations-requested" for some document formats (e.g., 'text/plain' or 'text/html') but not others (e.g., 'application/postscript'). This is no different than any other Job Template attribute since section 4.2, item 1, points out that a Printer object may support or not support any Job Template attribute based on the document format supplied by the client. However, a special mention is made here since it is very likely that a Printer object will support "orientation-requested" for only a subset of the supported document formats.

#### Standard enum values are:

3034 3035 3' 'portrait': The content will be imaged across the short edge of the medium. 3036 4' 'landscape': The content will be imaged across the long edge of the medium. Landscape is 3037 defined to be a rotation of the print-stream page to be imaged by +90 degrees with 3038 respect to the medium (i.e. anti-clockwise) from the portrait orientation. Note: The 3039 +90 direction was chosen because simple finishing on the long edge is the same edge 3040 whether portrait or landscape 3041 '5' 'reverse-landscape': The content will be imaged across the long edge of the medium. 3042 Reverse-landscape is defined to be a rotation of the print-stream page to be imaged 3043 by -90 degrees with respect to the medium (i.e. clockwise) from the portrait 3044 orientation. Note: The 'reverse-landscape' value was added because some 3045 applications rotate landscape -90 degrees from portrait, rather than +90 degrees. 3046 '6' 'reverse-portrait': The content will be imaged across the short edge of the medium. Reverse- 3047 portrait is defined to be a rotation of the print-stream page to be imaged by 180 3048 degrees with respect to the medium from the portrait orientation. Note: The 'reverse- 3049 portrait' value was added for use with the "finishings" attribute in cases where the 3050 opposite edge is desired for finishing a portrait document on simple finishing devices 3051 that have only one finishing position. Thus a 'text/'plain' portrait document can be 3052 stapled "on the right" by a simple finishing device as is common use with some 3053	3033	Value	Symbolic Name and Description
landscape': The content will be imaged across the long edge of the medium. Landscape is defined to be a rotation of the print-stream page to be imaged by +90 degrees with respect to the medium (i.e. anti-clockwise) from the portrait orientation. Note: The +90 direction was chosen because simple finishing on the long edge is the same edge whether portrait or landscape whether portrait or landscape reverse-landscape': The content will be imaged across the long edge of the medium. Reverse-landscape is defined to be a rotation of the print-stream page to be imaged by -90 degrees with respect to the medium (i.e. clockwise) from the portrait orientation. Note: The reverse-landscape' value was added because some applications rotate landscape -90 degrees from portrait, rather than +90 degrees. '6' reverse-portrait': The content will be imaged across the short edge of the medium. Reverse- portrait is defined to be a rotation of the print-stream page to be imaged by 180 degrees with respect to the medium from the portrait orientation. Note: The reverse- portrait' value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3034		
defined to be a rotation of the print-stream page to be imaged by +90 degrees with respect to the medium (i.e. anti-clockwise) from the portrait orientation. Note: The +90 direction was chosen because simple finishing on the long edge is the same edge whether portrait or landscape  reverse-landscape. The content will be imaged across the long edge of the medium.  Reverse-landscape is defined to be a rotation of the print-stream page to be imaged by -90 degrees with respect to the medium (i.e. clockwise) from the portrait orientation. Note: The reverse-landscape value was added because some applications rotate landscape -90 degrees from portrait, rather than +90 degrees.  reverse-portrait: The content will be imaged across the short edge of the medium. Reverse- portrait is defined to be a rotation of the print-stream page to be imaged by 180 degrees with respect to the medium from the portrait orientation. Note: The reverse- portrait' value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a rext/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3035	3'	'portrait': The content will be imaged across the short edge of the medium.
respect to the medium (i.e. anti-clockwise) from the portrait orientation. Note: The +90 direction was chosen because simple finishing on the long edge is the same edge whether portrait or landscape  reverse-landscape. The content will be imaged across the long edge of the medium.  Reverse-landscape is defined to be a rotation of the print-stream page to be imaged by -90 degrees with respect to the medium (i.e. clockwise) from the portrait orientation. Note: The 'reverse-landscape' value was added because some applications rotate landscape -90 degrees from portrait, rather than +90 degrees.  reverse-portrait': The content will be imaged across the short edge of the medium. Reverse- portrait is defined to be a rotation of the print-stream page to be imaged by 180 degrees with respect to the medium from the portrait orientation. Note: The 'reverse- portrait' value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3036	'4'	'landscape': The content will be imaged across the long edge of the medium. Landscape is
+90 direction was chosen because simple finishing on the long edge is the same edge whether portrait or landscape  ireverse-landscape. The content will be imaged across the long edge of the medium.  Reverse-landscape is defined to be a rotation of the print-stream page to be imaged by -90 degrees with respect to the medium (i.e. clockwise) from the portrait orientation. Note: The reverse-landscape value was added because some applications rotate landscape -90 degrees from portrait, rather than +90 degrees.  reverse-portrait: The content will be imaged across the short edge of the medium. Reverse- portrait is defined to be a rotation of the print-stream page to be imaged by 180 degrees with respect to the medium from the portrait orientation. Note: The reverse- portrait value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a rext/plain portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3037		defined to be a rotation of the print-stream page to be imaged by +90 degrees with
whether portrait or landscape  reverse-landscape: The content will be imaged across the long edge of the medium.  Reverse-landscape is defined to be a rotation of the print-stream page to be imaged  by -90 degrees with respect to the medium (i.e. clockwise) from the portrait  orientation. Note: The reverse-landscape value was added because some  applications rotate landscape -90 degrees from portrait, rather than +90 degrees.  reverse-portrait: The content will be imaged across the short edge of the medium. Reverse-  portrait is defined to be a rotation of the print-stream page to be imaged by 180  degrees with respect to the medium from the portrait orientation. Note: The reverse-  portrait value was added for use with the "finishings" attribute in cases where the  opposite edge is desired for finishing a portrait document on simple finishing devices  that have only one finishing position. Thus a rext/plain portrait document can be  stapled "on the right" by a simple finishing device as is common use with some	3038		respect to the medium (i.e. anti-clockwise) from the portrait orientation. Note: The
3041 '5' reverse-landscape': The content will be imaged across the long edge of the medium. 3042 Reverse-landscape is defined to be a rotation of the print-stream page to be imaged 3043 by -90 degrees with respect to the medium (i.e. clockwise) from the portrait 3044 orientation. Note: The 'reverse-landscape' value was added because some 3045 applications rotate landscape -90 degrees from portrait, rather than +90 degrees. 3046 '6' 'reverse-portrait': The content will be imaged across the short edge of the medium. Reverse- 3047 portrait is defined to be a rotation of the print-stream page to be imaged by 180 3048 degrees with respect to the medium from the portrait orientation. Note: The 'reverse- 3049 portrait' value was added for use with the "finishings" attribute in cases where the 3050 opposite edge is desired for finishing a portrait document on simple finishing devices 3051 that have only one finishing position. Thus a 'text'/plain' portrait document can be 3052 stapled "on the right" by a simple finishing device as is common use with some	3039		+90 direction was chosen because simple finishing on the long edge is the same edge
Reverse-landscape is defined to be a rotation of the print-stream page to be imaged by -90 degrees with respect to the medium (i.e. clockwise) from the portrait orientation. Note: The 'reverse-landscape' value was added because some applications rotate landscape -90 degrees from portrait, rather than +90 degrees.  '6' 'reverse-portrait': The content will be imaged across the short edge of the medium. Reverse-portrait is defined to be a rotation of the print-stream page to be imaged by 180 degrees with respect to the medium from the portrait orientation. Note: The 'reverse-portrait' value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3040		whether portrait or landscape
by -90 degrees with respect to the medium (i.e. clockwise) from the portrait orientation. Note: The 'reverse-landscape' value was added because some applications rotate landscape -90 degrees from portrait, rather than +90 degrees.  'reverse-portrait': The content will be imaged across the short edge of the medium. Reverse- portrait is defined to be a rotation of the print-stream page to be imaged by 180 degrees with respect to the medium from the portrait orientation. Note: The 'reverse- portrait' value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3041	'5'	'reverse-landscape': The content will be imaged across the long edge of the medium.
orientation. Note: The 'reverse-landscape' value was added because some applications rotate landscape -90 degrees from portrait, rather than +90 degrees.  '6' 'reverse-portrait': The content will be imaged across the short edge of the medium. Reverse- portrait is defined to be a rotation of the print-stream page to be imaged by 180  degrees with respect to the medium from the portrait orientation. Note: The 'reverse- portrait' value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3042		Reverse-landscape is defined to be a rotation of the print-stream page to be imaged
applications rotate landscape -90 degrees from portrait, rather than +90 degrees.  3046 '6' 'reverse-portrait': The content will be imaged across the short edge of the medium. Reverse- 3047 portrait is defined to be a rotation of the print-stream page to be imaged by 180 3048 degrees with respect to the medium from the portrait orientation. Note: The 'reverse- 3049 portrait' value was added for use with the "finishings" attribute in cases where the 3050 opposite edge is desired for finishing a portrait document on simple finishing devices 3051 that have only one finishing position. Thus a 'text'/plain' portrait document can be 3052 stapled "on the right" by a simple finishing device as is common use with some	3043		by -90 degrees with respect to the medium (i.e. clockwise) from the portrait
reverse-portrait': The content will be imaged across the short edge of the medium. Reverse- portrait is defined to be a rotation of the print-stream page to be imaged by 180  degrees with respect to the medium from the portrait orientation. Note: The reverse- portrait' value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3044		orientation. Note: The 'reverse-landscape' value was added because some
portrait is defined to be a rotation of the print-stream page to be imaged by 180 degrees with respect to the medium from the portrait orientation. Note: The 'reverse- portrait' value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3045		applications rotate landscape -90 degrees from portrait, rather than +90 degrees.
degrees with respect to the medium from the portrait orientation. Note: The 'reverse- portrait' value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3046	<b>'</b> 6'	'reverse-portrait': The content will be imaged across the short edge of the medium. Reverse-
portrait' value was added for use with the "finishings" attribute in cases where the opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3047		portrait is defined to be a rotation of the print-stream page to be imaged by 180
opposite edge is desired for finishing a portrait document on simple finishing devices that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3048		degrees with respect to the medium from the portrait orientation. Note: The 'reverse-
that have only one finishing position. Thus a 'text'/plain' portrait document can be stapled "on the right" by a simple finishing device as is common use with some	3049		portrait' value was added for use with the "finishings" attribute in cases where the
stapled "on the right" by a simple finishing device as is common use with some	3050		opposite edge is desired for finishing a portrait document on simple finishing devices
	3051		that have only one finishing position. Thus a 'text'/plain' portrait document can be
middle eastern languages such as Hebrew.	3052		
	3053		middle eastern languages such as Hebrew.

- Note: The effect of this attribute on jobs with multiple documents is controlled by the "multiple-document-3055
- handling" job attribute (section 4.2.4) and the relationship of this attribute and the other attributes that 3056
- control document processing is described in section 15.3. 3057
- 4.2.11 media (type3 keyword | name(MAX)) 3058
- This attribute identifies the medium that the Printer uses for all impressions of the Job. 3059
- The values for "media" include medium-names, medium-sizes, input-trays and electronic forms so that one 3060
- attribute specifies the media. If a Printer object supports a medium name as a value of this attribute, such a 3061
- medium name implicitly selects an input-tray that contains the specified medium. If a Printer object 3062
- supports a medium size as a value of this attribute, such a medium size implicitly selects a medium name 3063
- that in turn implicitly selects an input-tray that contains the medium with the specified size. If a Printer 3064
- object supports an input-tray as the value of this attribute, such an input-tray implicitly selects the medium 3065
- that is in that input-tray at the time the job prints. This case includes manual-feed input-trays. If a Printer 3066
- object supports an electronic form as the value of this attribute, such an electronic form implicitly selects a 3067
- medium-name that in turn implicitly selects an input-tray that contains the medium specified by the 3068
- electronic form. The electronic form also implicitly selects an image that the Printer MUST merge with the 3069
- document data as its prints each page. 3070
- Standard keyword values are (taken from ISO DPA and the Printer MIB) and are listed in section 14. An 3071
- administrator MAY define additional values using the 'name' or 'keyword' attribute syntax, depending on 3072
- implementation. 3073
- There is also an additional Printer attribute named "media-ready" which differs from "media-supported" in 3074
- that legal values only include the subset of "media-supported" values that are physically loaded and ready 3075
- for printing with no operator intervention required. If an IPP object supports "media-supported", it NEED 3076
- NOT support "media-ready". 3077
- The relationship of this attribute and the other attributes that control document processing is described in 3078
- section 15.3. 3079
- 4.2.12 printer-resolution (resolution) 3080
- This attribute identifies the resolution that Printer uses for the Job. 3081
- 4.2.13 print-quality (type2 enum) 3082
- This attribute specifies the print quality that the Printer uses for the Job. 3083
- The standard enum values are: 3084
- Value Symbolic Name and Description 3085 3086
- 3 'draft': lowest quality available on the printer 3087
- 'normal': normal or intermediate quality on the printer '4' 3088

3089 3090	<i>'</i> 5 <i>'</i>	high? highest quality available on the printer
3091	4.3 Job De	scription Attributes
3092 3093 3094 3095	summarizes that MUST	es in this section form the attribute group called "job-description". The following table these attributes. The third column indicates whether the attribute is a REQUIRED attribute be supported by Printer objects. If it is not indicated as REQUIRED, then it is OPTIONAL aum size in octets for 'text' and 'name' attributes is indicated in parenthesizes.

3096 - 3097	+   Attribute	+   Syntax	++   REQUIRED?
3098 - 3099		+   uri	REQUIRED
3100 - 3101	+   job-id	+   integer(1:MAX)	REQUIRED
3102 - 3103	job-printer-uri	+   uri	REQUIRED
3104 - 3105	job-more-info	uri	
3106 - 3107	job-name	name (MAX)	REQUIRED
3108 - 3109	job-originating-user-name	name (MAX)	REQUIRED
3110 - 3111	job-state	type1 enum	REQUIRED
3112 - 3113	job-state-reasons	1setOf type2 keyword	REQUIRED
3114 - 3115	job-state-message	text (MAX)	
3116 - 3117	number-of-documents	integer (0:MAX)	
3118 - 3119	output-device-assigned	name (127)	
3120 - 3121	time-at-creation	integer (MIN:MAX)	REQUIRED
3122 - 3123	time-at-processing	integer (MIN:MAX)	REQUIRED
3124 - 3125	time-at-completed	integer (MIN:MAX)	REQUIRED
3126 - 3127	job-printer-up-time	integer (1:MAX)	REQUIRED
3128 - 3129	date-time-at-creation	dateTime	OPTIONAL
3130 - 3131	date-time-at-processing	dateTime	OPTIONAL
3132 - 3133	date-time-at-completed	dateTime	OPTIONAL
3134 - 3135	number-of-intervening-jobs	integer (0:MAX)	
3136 - 3137	job-message-from-operator	text (127)	
3138 - 3139	job-k-octets	integer (0:MAX)	
3140 - 3141	job-impressions	integer (0:MAX)	
3142 - 3143	job-media-sheets	integer (0:MAX)	
3144 - 3145	job-k-octets-processed	integer (0:MAX)	

deBry, Hastings, Herriot, Isaacson, Powell

```
3146
   job-impressions-completed | integer (0:MAX)
3147
  +----+
3148
  job-media-sheets-completed | integer (0:MAX)
3149
  ÷-------
3150
   attributes-charset charset
3151
  3152
   attributes-natural-language | naturalLanguage | REQUIRED |
3153
  ÷------
3154
```

3156

3157

4.3.1 job-uri (uri)

- This REQUIRED attribute contains the URI for the job. The Printer object, on receipt of a new job, 3158 generates a URI which identifies the new Job. The Printer object returns the value of the "job-uri" attribute 3159 as part of the response to a create request. The precise format of a Job URI is implementation dependent. 3160 If the Printer object supports more than one URI and there is some relationship between the newly formed 3161 Job URI and the Printer object's URI, the Printer object uses the Printer URI supplied by the client in the 3162 create request. For example, if the create request comes in over a secure channel, the new Job URI MUST 3163 use the same secure channel. This can be guaranteed because the Printer object is responsible for 3164 generating the Job URI and the Printer object is aware of its security configuration and policy as well as the 3165 Printer URI used in the create request. 3166
- For a description of this attribute and its relationship to "job-id" and "job-printer-uri" attribute, see the discussion in section 2.4 on "Object Identity".
- 3169 4.3.2 job-id (integer(1:MAX))
- This REQUIRED attribute contains the ID of the job. The Printer, on receipt of a new job, generates an ID which identifies the new Job on that Printer. The Printer returns the value of the "job-id" attribute as part of the response to a create request. The 0 value is not included to allow for compatibility with SNMP index values which also cannot be 0.
- For a description of this attribute and its relationship to "job-uri" and "job-printer-uri" attribute, see the discussion in section 2.4 on "Object Identity".
- 3176 4.3.3 job-printer-uri (uri)
- This REQUIRED attribute identifies the Printer object that created this Job object. When a Printer object creates a Job object, it populates this attribute with the Printer object URI that was used in the create request. This attribute permits a client to identify the Printer object that created this Job object when only the Job object's URI is available to the client. The client queries the creating Printer object to determine which languages, charsets, operations, are supported for this Job.
- For a description of this attribute and its relationship to "job-uri" and "job-id" attribute, see the discussion in section 2.4 on "Object Identity".

- 3184 4.3.4 job-more-info (uri)
- Similar to "printer-more-info", this attribute contains the URI referencing some resource with more
- information about this Job object, perhaps an HTML page containing information about the Job.
- 3187 4.3.5 job-name (name(MAX))
- This REQUIRED attribute is the name of the job. It is a name that is more user friendly than the "job-uri"
- attribute value. It does not need to be unique between Jobs. The Job's "job-name" attribute is set to the
- value supplied by the client in the "job-name" operation attribute in the create request (see Section 3.2.1.1).
- If, however, the "job-name" operation attribute is not supplied by the client in the create request, the Printer
- object, on creation of the Job, MUST generate a name. The printer SHOULD generate the value of the
- Job's "job-name" attribute from the first of the following sources that produces a value: 1) the "document-
- name" operation attribute of the first (or only) document, 2) the "document-URI" attribute of the first (or
- only) document, or 3) any other piece of Job specific and/or Document Content information.
- 3196 4.3.6 job-originating-user-name (name(MAX))
- This REQUIRED attribute contains the name of the end user that submitted the print job. The Printer
- object sets this attribute to the most authenticated printable name that it can obtain from the authentication
- service over which the IPP operation was received. Only if such is not available, does the Printer object use
- the value supplied by the client in the "requesting-user-name" operation attribute of the create operation
- 3201 (see Section 8).
- Note: The Printer object needs to keep an internal originating user id of some form, typically as a credential
- of a principal, with the Job object. Since such an internal attribute is implementation-dependent and not of
- interest to clients, it is not specified as a Job Description attribute. This originating user id is used for
- authorization checks (if any) on all subsequent operation.
- 3206 4.3.7 job-state (type1 enum)
- This REQUIRED attribute identifies the current state of the job. Even though the IPP protocol defines
- seven values for job states (plus the out-of-band 'unknown' value see Section 4.1), implementations only
- need to support those states which are appropriate for the particular implementation. In other words, a
- Printer supports only those job states implemented by the output device and available to the Printer object
- 3211 implementation.

3212 Standard enum values are:

Values

0 <u>2</u> 10	v aracs	Symbolic Traine and Description
3214		
3215	3'	'pending': The job is a candidate to start processing, but is not yet

Symbolic Name and Description

- ipending': The job is a candidate to start processing, but is not yet processing.
- 3217 '4' 'pending-held': The job is not a candidate for processing for any number of reasons but will return to the 'pending' state as soon as the reasons are no longer present. The job's

"job-state-reason" attribute MUST indicate why the job is no longer a candidate for

3220		processing.
3221		
3222	'5'	'processing': One or more of:
3223		
3224		1. the job is using, or is attempting to use, one or more purely software processes
3225		that are analyzing, creating, or interpreting a PDL, etc.,
3226		2. the job is using, or is attempting to use, one or more hardware devices that are
3227		interpreting a PDL, making marks on a medium, and/or performing finishing, such as
3228		stapling, etc.,  3. the Printer object has made the job ready for printing, but the output device is not
3229 3230		yet printing it, either because the job hasn't reached the output device or because the
3230 3231		job is queued in the output device or some other spooler, awaiting the output device
3232		to print it.
3233		to print it.
		When the ich is in the 'nrecessine' state the entire ich state includes the detailed
3234		When the job is in the 'processing' state, the entire job state includes the detailed status represented in the Printer object's "printer-state", "printer-state-reasons", and
3235		"printer-state-message" attributes.
3236		printer-state-message attributes.
3237		Implementations MAY, though they NEED NOT, include additional values in the
3238		job's "job-state-reasons" attribute to indicate the progress of the job, such as adding
3239		the 'job-printing' value to indicate when the output device is actually making marks
3240		on paper and/or the 'processing-to-stop-point' value to indicate that the IPP object is
3241		in the process of canceling or aborting the job. Most implementations won't bother
3242		with this nuance.
3243		
3244	<b>'</b> 6'	'processing-stopped': The job has stopped while processing for any number of reasons and
3245		will return to the 'processing' state as soon as the reasons are no longer present.
3246		
3247		The job's "job-state-reason" attribute MAY indicate why the job has stopped
3248		processing. For example, if the output device is stopped, the 'printer-stopped' value
3249		MAY be included in the job's "job-state-reasons" attribute.
3250		
3251		Note: When an output device is stopped, the device usually indicates its condition in
3252		human readable form locally at the device. A client can obtain more complete device
3253		status remotely by querying the Printer object's "printer-state", "printer-state-reasons"
3254		and "printer-state-message" attributes.
3255		
3256	7'	'canceled': The job has been canceled by a Cancel-Job operation and the Printer object has
3257		completed canceling the job and all job status attributes have reached their final
3258		values for the job. While the Printer object is canceling the job, the job remains in its
3259		current state, but the job's "job-state-reasons" attribute SHOULD contain the
3260		'processing-to-stop-point' value and one of the 'canceled-by-user', 'canceled-by-
3261		operator', or 'canceled-at-device' value. When the job moves to the 'canceled' state,

8'

the 'processing-to-stop-point' value, if present, MUST be removed, but the 'canceled-by-xxx', if present, MUST remain.

'aborted': The job has been aborted by the system, usually while the job was in the 'processing' or 'processing-stopped' state and the Printer has completed aborting the job and all job status attributes have reached their final values for the job. While the Printer object is aborting the job, the job remains in its current state, but the job's "job-state-reasons" attribute SHOULD contain the 'processing-to-stop-point' and 'aborted-by-system' values. When the job moves to the 'aborted' state, the 'processing-to-stop-point' value, if present, MUST be removed, but the 'aborted-by-system' value, if present, MUST remain.

'completed': The job has completed successfully or with warnings or errors after processing and all of the job media sheets have been successfully stacked in the appropriate output bin(s) and all job status attributes have reached their final values for the job. The job's "job-state-reasons" attribute SHOULD contain one of: 'completed-successfully', 'completed-with-warnings', or 'completed-with-errors' values.

- The final value for this attribute MUST be one of: 'completed', 'canceled', or 'aborted' before the Printer removes the job altogether. The length of time that jobs remain in the 'canceled', 'aborted', and 'completed' states depends on implementation. See section 4.3.7.2.
- The following figure shows the normal job state transitions.

Normally a job progresses from left to right. Other state transitions are unlikely, but are not forbidden. Not shown are the transitions to the 'canceled' state from the 'pending', 'pending-held', and 'processing-stopped' states.

Jobs reach one of the three terminal states: 'completed', 'canceled', or 'aborted', after the jobs have completed all activity, including stacking output media, after the jobs have completed all activity, and all job status attributes have reached their final values for the job.

# 4.3.7.1 Forwarding Servers Issue 14

As with all other IPP attributes, if the implementation cannot determine the correct value for this attribute, it SHOULD respond with the out-of-band value 'unknown' (see section 4.1) rather than try to guess at some possibly incorrect value and give the end user the wrong impression about the state of the Job object. For example, if the implementation is just a gateway into some printing system from which it can normally get

- status, but temporarily is unable, then the implementation should return the 'unknown' value. However, if
- the implementation is a gateway to a printing system that never provides detailed status about the print job,
- the implementation MAY set the IPP Job object's state to 'completed', provided that it also sets the 'queued-
- in-device' value in the job's "job-state-reasons" attribute (see section 4.3.8). Issue 14
- 3307 4.3.7.2 Partitioning of Job States
- This section partitions the 7 job states into phases: Job Not Completed, Job Retention, Job History, and Job
- Removal. This section also explains the 'job-restartable' value of the "job-state-reasons" Job Description
- attribute for use with the Restart-Job operation.
- Job Not Completed: When a job is in the 'pending', 'pending-held', 'processing', or 'processing-stopped'
- states, the job is not completed.
- Job Retention: When a job enters one of the three terminal job states: 'completed', 'canceled', or 'aborted',
- the IPP Printer object MAY "retain" the job in a restartable condition for an implementation-defined time
- period. This time period MAY be zero seconds and MAY depend on the terminal job state. This phase is
- called Job Retention. While in the Job Retention phase, the job's document data is retained and a client
- may restart the job using the Restart-Job operation. If the IPP object supports Issue 30 the Restart-Job
- operation, then it SHOULD indicate that the job is restartable by adding the 'job-restartable' value to the
- job's "job-state-reasons" attribute (see Section 4.3.8) during the Job Retention phase.
- Job History: After the Job Retention phase expires for a job, the Printer object deletes the document data
- for the job and the job becomes part of the Job History. The Printer object MAY also delete any number of
- the job attributes. Since the job is no longer restartable, the Printer object MUST remove the job-
- restartable' value from the job's "job-state-reasons" attribute, if present.
- Job Removal: After the job has remained in the Job History for an implementation-defined time, such as
- when the number of jobs exceeds a fixed number or after a fixed time period (which MAY be zero
- seconds), the IPP Printer removes the job from the system.
- Using the Get-Jobs operation and supplying the 'not-completed' value for the "which-jobs" operation
- attribute, a client is requesting jobs in the Job Not Completed phase. Using the Get-Jobs operation and
- supplying the 'completed' value for the "which-jobs" operation attribute, a client is requesting jobs in the
- Job Retention and Job History phases. Using the Get-Job-Attributes operation, a client is requesting a job
- in any phase except Job Removal. After Job Removal, the Get-Job-Attributes and Get-Jobs operations no
- longer are capable of returning any information about a job.
- 4.3.8 job-state-reasons (1setOf type2 keyword)
- This REQUIRED attribute provides additional information about the job's current state, i.e., information
- that augments the value of the job's "job-state" attribute.
- These values MAY be used with any job state or states for which the reason makes sense. Some of these
- value definitions indicate conformance requirements; the rest are OPTIONAL. Issue 30 Furthermore,
- when implemented, the Printer MUST return these values when the reason applies and MUST NOT return
- them when the reason no longer applies whether the value of the Job's "job-state" attribute changed or not.

- When the Job does not have any reasons for being in its current state, the value of the Job's "job-statereasons" attribute MUST be 'none'.
- Note: While values cannot be added to the 'job-state' attribute without impacting deployed clients that take actions upon receiving "job-state" values, it is the intent that additional "job-state-reasons" values can be defined and registered without impacting such deployed clients. In other words, the "job-state-reasons" attribute is intended to be extensible.
- The following standard keyword values are defined. For ease of understanding, the values are presented in the order in which the reasons are likely to occur (if implemented), starting with the 'job-incoming' value:
  - 'none': There are no reasons for the job's current state. This state reason is semantically equivalent to "job-state-reasons" without any value and MUST be used when there is no other value, since the 1setOf attribute syntax requires at least one value. Issue 30
  - job-incoming: The Create-Job operation has been accepted by the Printer, but the Printer is expecting additional Send-Document and/or Send-URI operations and/or is accessing/accepting document data.
  - job-data-insufficient': The Create-Job operation has been accepted by the Printer, but the Printer is expecting additional document data before it can move the job into the 'processing' state. If a Printer starts processing before it has received all data, the Printer removes the 'job-data-insufficient' reason, but the 'job-incoming' remains. If a Printer starts processing after it has received all data, the Printer removes the 'job-data-insufficient' reason and the 'job-incoming' at the same time. Issue 13
  - 'document-access-error': After accepting a Print-URI or Send-URI request, the Printer could not access one or more documents passed by reference. This reason is intended to cover any file access problem, including file does not exist and access denied because of an access control problem. The Printer MAY also indicate the document access error using the "job-document-access-errors" Job Description attribute (see section 4.3.11). Whether the Printer aborts the job and moves the job to the 'aborted' job state or prints all documents that are accessible and moves the job to the 'completed' job state and adds the 'completed-with-errors' value in the job's "job-state-reasons" attribute depends on implementation and/or site policy. This value SHOULD be supported if the Print-URI or Send-URI operations are supported. Issue 30 and Issue 35
  - 'submission-interrupted': The job was not completely submitted for some unforeseen reason, such as:

    (1) the Printer has crashed before the job was closed by the client, (2) the Printer or the document transfer method has crashed in some non-recoverable way before the document data was entirely transferred to the Printer, (3) the client crashed or failed to close the job before the time-out period. See section 4.4.31.
  - job-outgoing': The Printer is transmitting the job to the output device.
  - 'job-hold-until-specified': The value of the job's "job-hold-until" attribute was specified with a time period that is still in the future. The job MUST NOT be a candidate for processing until this reason is removed and there are no other reasons to hold the job. This value SHOULD be supported if the "job-hold-until" Job Template attribute is supported. Issue 30
  - 'resources-are-not-ready': At least one of the resources needed by the job, such as media, fonts, resource objects, etc., is not ready on any of the physical printer's for which the job is a candidate. This condition MAY be detected when the job is accepted, or subsequently while the job is pending or processing, depending on implementation. The job may remain in its current state or be moved to the 'pending-held' state, depending on implementation and/or job scheduling policy.

- 'printer-stopped-partly': The value of the Printer's "printer-state-reasons" attribute contains the value 'stopped-partly'.
- 'printer-stopped': The value of the Printer's "printer-state" attribute is 'stopped'.
- 'job-interpreting': Job is in the 'processing' state, but more specifically, the Printer is interpreting the document data.
- 'job-queued': Job is in the 'processing' state, but more specifically, the Printer has queued the document data.
- job-transforming: Job is in the 'processing' state, but more specifically, the Printer is interpreting document data and producing another electronic representation.
- job-queued-for-marker': Job is in any of the 'pending-held', 'pending', or 'processing' states, but more specifically, the Printer has completed enough processing of the document to be able to start marking and the job is waiting for the marker. Systems that require human intervention to release jobs using the Release-Job operation, put the job into the 'pending-held' job state. Systems that automatically select a job to use the marker put the job into the 'pending' job state or keep the job in the 'processing' job state while waiting for the marker, depending on implementation. All implementations put the job into (or back into) the 'processing' state when marking does begin. Issue 31
- 'job-printing': The output device is marking media. This value is useful for Printers which spend a great deal of time processing (1) when no marking is happening and then want to show that marking is now happening or (2) when the job is in the process of being canceled or aborted while the job remains in the 'processing' state, but the marking has not yet stopped so that impression or sheet counts are still increasing for the job.
- 'job-canceled-by-user': The job was canceled by the owner of the job using the Cancel-Job request, i.e., by a user whose authenticated identity is the same as the value of the originating user that created the Job object, or by some other authorized end-user, such as a member of the job owner's security group. This value SHOULD be supported. Issue 30
- job-canceled-by-operator': The job was canceled by the operator using the Cancel-Job request, i.e., by a user who has been authenticated as having operator privileges (whether local or remote). If the security policy is to allow anyone to cancel anyone's job, then this value may be used when the job is canceled by other than the owner of the job. For such a security policy, in effect, everyone is an operator as far as canceling jobs with IPP is concerned. This value SHOULD be supported if the implementation permits canceling by other than the owner of the job. Issue 30
- job-canceled-at-device': The job was canceled by an unidentified local user, i.e., a user at a console at the device. This value SHOULD be supported if the implementation supports canceling jobs at the console. Issue 30
- 'aborted-by-system': The job (1) is in the process of being aborted, (2) has been aborted by the system and placed in the 'aborted' state, or (3) has been aborted by the system and placed in the 'pending-held' state, so that a user or operator can manually try the job again. This value SHOULD be supported. Issue 30
- 'unsupported-compression': The job was aborted by the system because the Printer determined while attempting to decompress the document-data's that the compression is actually not among those supported by the Printer. This value MUST be supported, since "compressions is a REQUIRED operation attribute. Issue 6
- 'compression-error': The job was aborted by the system because the Printer encountered an error in the document-data while decompressing it. If the Printer posts this reason, the document-data has

already passed any tests that would have led to the 'unsupported-compression' job-state-reason. Issue 6

- 'unsupported-document-format': The job was aborted by the system because the document-data's document-format is not among those supported by the Printer. If the client specifies the document-format as 'application/octet-stream', the printer MAY abort the job and post this reason even though the format is a member of the "document-format-supported" printer attribute, but not among the auto-sensed document-formats. This value MUST be supported, since "document-format" is a REQUIRED operation attribute. Issue 3
- 'document-format-error': The job was aborted by the system because the Printer encountered an error in the document-data while processing it. If the Printer posts this reason, the document-data has already passed any tests that would have led to the 'unsupported-document-format' job-state-reason.

  Issue 3
- 'processing-to-stop-point': The requester has issued a Cancel-Job operation or the Printer object has aborted the job, but is still performing some actions on the job until a specified stop point occurs or job termination/cleanup is completed.
  - If the implementation requires some measurable time to cancel the job in the 'processing' or 'processing-stopped' job states, the IPP object MUST use this value 

    Issue 30 to indicate that the Printer object is still performing some actions on the job while the job remains in the 'processing' or 'processing-stopped' state. After all the job's job description attributes have stopped incrementing, the Printer object moves the job from the 'processing' state to the 'canceled' or 'aborted' job states.
- 'service-off-line': The Printer is off-line and accepting no jobs. All 'pending' jobs are put into the 'pending-held' state. This situation could be true if the service's or document transform's input is impaired or broken.
- job-completed-successfully. The job completed successfully. This value SHOULD be supported. Issue 30
- job-completed-with-warnings': The job completed with warnings. This value SHOULD be supported if the implementation detects warnings. Issue 30
- job-completed-with-errors': The job completed with errors (and possibly warnings too). This value SHOULD be supported if the implementation detects errors. Issue 30
- job-restartable' This job is retained (see section 4.3.7.2) and is currently able to be restarted using the Restart-Job operation (see section 3.3.7). If job-restartable' is a value of the job's job-state-reasons' attribute, then the IPP object MUST accept a Restart-Job operation for that job. This value SHOULD be supported if the Restart-Job operation is supported. Issue 30
- 'queued-in-device': The job has been forwarded to a device or print system that is unable to send back status. The Printer sets the job's "job-state " attribute to 'completed' and adds the 'queued-in-device' value to the job's "job-state-reasons" attribute to indicate that the Printer has no additional information about the job and never will have any better information. See section 4.3.7.1. Issue 14

## 4.3.9 job-state-message (text(MAX))

This attribute specifies information about the "job-state" and "job-state-reasons" attributes in human readable text. If the Printer object supports this attribute, the Printer object MUST be able to generate this message in any of the natural languages identified by the Printer's "generated-natural-language-supported" attribute (see the "attributes-natural-language" operation attribute specified in Section 3.1.4.1).

- The value SHOULD NOT contain additional information not contained in the values of the "job-state" and
- "job-states-reasons" attributes, such as interpreter error information. Otherwise, application programs
- might attempt to parse the (localized text). For such additional information such as interpreter errors for
- application program consumption or specific document access errors, new attributes with keyword values,
- needs to be developed and registered.
- 4.3.10 job-detailed-status-messages (1setOf text(MAX)) Issue 35
- This attribute specifies additional detailed and technical information about the job. Neither the Printer nor
- the client localizes the message(s), since they are intended for use by the system administrator or other
- experienced technical persons. Clients MUST NOT attempt to parse the value of this attribute. See "job-
- document-access-errors" (section 4.3.11) for additional errors that a program can process.
- 4.3.11 job-document-access-errors (1setOf text(MAX)) Issue 35
- This attribute provides additional information about each document access error for this job encountered by
- the Printer after it returned a response to the Print-URI or Send-URI operation and subsequently attempted
- to access document(s) supplied in the Print-URI or Send-URI operation. For errors in the protocol that is
- identified by the URI scheme in the "document-uri" operation attribute, such as 'http:' or 'ftp:', the error code
- is returned in parentheses, followed by the URI. For example:
- 3486 (404) http://ftp.pwg.org/pub/pwg/ipp/new\_MOD/ipp-model-v11-990510.pdf
- 3487
- Most Internet protocols use decimal error codes (unlike IPP), so the ASCII error code representation is in
- 3489 decimal.
- 3490 4.3.12 number-of-documents (integer(0:MAX))
- This attribute indicates the number of documents in the job, i.e., the number of Send-Document, Send-URI,
- Print-Job, or Print-URI operations that the Printer has accepted for this job, regardless of whether the
- document data has reached the Printer object or not.
- Implementations supporting the OPTIONAL Create-Job/Send-Document/Send-URI operations SHOULD
- support this attribute so that clients can query the number of documents in each job.
- 3496 4.3.13 output-device-assigned (name(127))
- This attribute identifies the output device to which the Printer object has assigned this job. If an output
- device implements an embedded Printer object, the Printer object NEED NOT set this attribute. If a print
- server implements a Printer object, the value MAY be empty (zero-length string) or not returned until the
- Printer object assigns an output device to the job. This attribute is particularly useful when a single Printer
- object support multiple devices (so called "fan-out").

- 4.3.14 Event Time Job Description Attributes Issue 17
- This section defines the Job Description attributes that indicate the time at which certain events occur for a
- job. If the job event has not yet occurred, then the IPP object MUST return the 'no-value' out-of-band value
- (see the beginning of Section 4.1). The "time-at-xxx(integer)" attributes represent time as an 'integer'
- representing the number of seconds since the device was powered up (informally called "time ticks"). The
- "date-time-at-xxx(dateTime)" attributes represent time as 'dateTime' representing date and time (including
- an offset from UTC).
- In order to populate these attributes, the Printer object copies the value(s) of the following Printer
- Description attributes at the time the event occurs:
- 1. the value in the Printer's "printer-up-time" attribute for the "time-at-xxx(integer)" attributes
- 2. the value in the Printer's "printer-current-time" attribute for the "date-time-at-xxx(dateTime)" attributes.
- If the Printer resets its "printer-up-time" attribute to 1 on power-up (see section 4.4.29) and has persistent
- jobs, then it MUST change all of jobs' "time-at-xxx(integer)" (time tick) job attributes whose events have
- occurred either to:
- 1. 0 to indicate that the event happened before the most recent power up OR
- 2. the negative of the number of seconds before the most recent power-up that the event took place, though the negative number NEED NOT reflect the exact number of seconds.
- If a client queries a "time-at-xxx(integer)" time tick Job attribute and finds the value to be 0 or negative, the client MUST assume that the event occurred in some life other than the Printer's current life.
- Note: A Printer does not change the values of any "date-time-at-xxx(dateTime)" job attributes on power-up.
- 4.3.14.1 time-at-creation (integer(MIN:MAX))
- This REQUIRED attribute indicates the time at which the Job object was created.
- 4.3.14.2 time-at-processing (integer(MIN:MAX))
- 3526 This REQUIRED attribute indicates the time at which the Job object first began processing after the create
- operation or the most recent Restart-Job operation. The out-of-band 'no-value' value is returned if the job
- has not yet been in the 'processing' state (see the beginning of Section 4.1). Issue 17
- 4.3.14.3 time-at-completed (integer(MIN:MAX))
- This REQUIRED attribute indicates the time at which the Job object completed (or was cancelled or
- aborted). The out-of-band 'no-value' value is returned if the job has not yet completed, been canceled, or
- aborted (see the beginning of Section 4.1).

- 3533 4.3.14.4 job-printer-up-time (integer(1:MAX)) Issue 17
- This REQUIRED Job Description attribute indicates the amount of time (in seconds) that the Printer
- implementation has been up and running. This attribute is an alias for the "printer-up-time" Printer
- Description attribute (see Section 4.4.29).
- A client MAY request this attribute in a Get-Job-Attributes or Get-Jobs request and use the value returned
- in combination with other requested Event Time Job Description Attributes in order to display time
- attributes to a user. The difference between this attribute and the 'integer' value of a "time-at-xxx" attribute
- is the number of seconds ago that the "time-at-xxx" event occurred. A client can compute the wall-clock
- time at which the "time-at-xxx" event occurred by subtracting this difference from the client's wall-clock
- 3542 time.
- 4.3.14.5 date-time-at-creation (dateTime) Issue 17
- This attribute indicates the date and time at which the Job object was created.
- 4.3.14.6 date-time-at-processing (dateTime) Issue 17
- This attribute indicates the date and time at which the Job object first began processing after the create
- operation or the most recent Restart-Job operation.
- 3548 4.3.14.7 date-time-at-completed (dateTime) Issue 17
- This attribute indicates the date and time at which the Job object completed (or was cancelled or aborted).
- 4.3.15 number-of-intervening-jobs (integer(0:MAX))
- This attribute indicates the number of jobs that are "ahead" of this job in the relative chronological order of
- expected time to complete (i.e., the current scheduled order). For efficiency, it is only necessary to calculate
- 3553 this value when an operation is performed that requests this attribute.
- 3554 4.3.16 job-message-from-operator (text(127))
- This attribute provides a message from an operator, system administrator or "intelligent" process to indicate
- to the end user the reasons for modification or other management action taken on a job.
- 3557 4.3.17 Job Size Attributes
- This sub-section defines job attributes that describe the size of the job. These attributes are not intended to
- be counters; they are intended to be useful routing and scheduling information if known. For these
- attributes, the Printer object may try to compute the value if it is not supplied in the create request. Even if
- the client does supply a value for these three attributes in the create request, the Printer object MAY choose
- to change the value if the Printer object is able to compute a value which is more accurate than the client

- supplied value. The Printer object may be able to determine the correct value for these attributes either right at job submission time or at any later point in time.
- 3565 4.3.17.1 job-k-octets (integer(0:MAX))
- This attribute specifies the total size of the document(s) in K octets, i.e., in units of 1024 octets requested to
- be processed in the job. The value MUST be rounded up, so that a job between 1 and 1024 octets MUST
- be indicated as being 1, 1025 to 2048 MUST be 2, etc.
- This value MUST NOT include the multiplicative factors contributed by the number of copies specified by
- 3570 the "copies" attribute, independent of whether the device can process multiple copies without making
- multiple passes over the job or document data and independent of whether the output is collated or not.
- Thus the value is independent of the implementation and indicates the size of the document(s) measured in
- 3573 K octets independent of the number of copies.
- This value MUST also not include the multiplicative factor due to a copies instruction embedded in the
- document data. If the document data actually includes replications of the document data, this value will
- include such replication. In other words, this value is always the size of the source document data, rather
- than a measure of the hardcopy output to be produced.
- 3578 4.3.17.2 job-impressions (integer(0:MAX))
- This attribute specifies the total size in number of impressions of the document(s) being submitted (see the
- definition of impression in section 12.2.5).
- As with "job-k-octets", this value MUST NOT include the multiplicative factors contributed by the number
- of copies specified by the "copies" attribute, independent of whether the device can process multiple copies
- without making multiple passes over the job or document data and independent of whether the output is
- collated or not. Thus the value is independent of the implementation and reflects the size of the
- document(s) measured in impressions independent of the number of copies.
- As with "job-k-octets", this value MUST also not include the multiplicative factor due to a copies
- instruction embedded in the document data. If the document data actually includes replications of the
- document data, this value will include such replication. In other words, this value is always the number of
- impressions in the source document data, rather than a measure of the number of impressions to be
- produced by the job.
- 4.3.17.3 job-media-sheets (integer(0:MAX))
- This attribute specifies the total number of media sheets to be produced for this job.
- Unlike the "job-k-octets" and the "job-impressions" attributes, this value MUST include the multiplicative
- factors contributed by the number of copies specified by the "copies" attribute and a 'number of copies'
- instruction embedded in the document data, if any. This difference allows the system administrator to
- control the lower and upper bounds of both (1) the size of the document(s) with "job-k-octets-supported"
- and "job-impressions-supported" and (2) the size of the job with "job-media-sheets-supported".

- 3598 4.3.18 Job Progress Attributes
- This sub-section defines job attributes that describe the progress of the job. These attributes are intended to
- be counters. That is, the value for a job that has not started processing MUST be 0. When the job's "job-
- state" is 'processing' or 'processing-stopped', this value is intended to contain the amount of the job that has
- been processed to the time at which the attributes are requested. When the job enters the 'completed',
- 'canceled', or 'aborted' states, these values are the final values for the job.
- 4.3.18.1 job-k-octets-processed (integer(0:MAX))
- This attribute specifies the total number of octets processed in K octets, i.e., in units of 1024 octets so far.
- The value MUST be rounded up, so that a job between 1 and 1024 octets inclusive MUST be indicated as
- 3607 being 1, 1025 to 2048 inclusive MUST be 2, etc.
- For implementations where multiple copies are produced by the interpreter with only a single pass over the
- data, the final value MUST be equal to the value of the "job-k-octets" attribute. For implementations where
- multiple copies are produced by the interpreter by processing the data for each copy, the final value MUST
- be a multiple of the value of the "job-k-octets" attribute.
- 4.3.18.2 job-impressions-completed (integer(0:MAX))
- This job attribute specifies the number of impressions completed for the job so far. For printing devices,
- the impressions completed includes interpreting, marking, and stacking the output.
- 3615 4.3.18.3 job-media-sheets-completed (integer(0:MAX))
- This job attribute specifies the media-sheets completed marking and stacking for the entire job so far
- whether those sheets have been processed on one side or on both.
- 3618 4.3.19 attributes-charset (charset)
- This REQUIRED attribute is populated using the value in the client supplied "attributes-charset" attribute in
- the create request. It identifies the charset (coded character set and encoding method) used by any Job
- attributes with attribute syntax 'text' and 'name' that were supplied by the client in the create request. See
- Section 3.1.4 for a complete description of the "attributes-charset" operation attribute.
- This attribute does not indicate the charset in which the 'text' and 'name' values are stored internally in the
- Job object. The internal charset is implementation-defined. The IPP object MUST convert from whatever
- the internal charset is to that being requested in an operation as specified in Section 3.1.4.
- 3626 4.3.20 attributes-natural-language (naturalLanguage)
- This REQUIRED attribute is populated using the value in the client supplied "attributes-natural-language"
- attribute in the create request. It identifies the natural language used for any Job attributes with attribute
- syntax 'text' and 'name' that were supplied by the client in the create request. See Section 3.1.4 for a

3630	complete description of the "attributes-natural-language" operation attribute. See Sections 4.1.1.2 and
3631	4.1.2.2 for how a Natural Language Override may be supplied explicitly for each 'text' and 'name' attribute
3632	value that differs from the value identified by the "attributes-natural-language" attribute.

## 4.4 Printer Description Attributes

- These attributes form the attribute group called "printer-description". The following table summarizes these attributes, their syntax, and whether or not they are REQUIRED for a Printer object to support. If they are not indicated as REQUIRED, they are OPTIONAL. The maximum size in octets for 'text' and 'name' attributes is indicated in parenthesizes.
- Note: How these attributes are set by an Administrator is outside the scope of this IPP/1.1 document.

3639 - 3640	Attribute	Syntax	REQUIRED?
3641 - 3642	printer-uri-supported	lsetOf uri	REQUIRED
3643 3644	uri-security-supported	1setOf type2 keyword	REQUIRED
3645 - 3646 3647	uri-authentication- supported	lsetOf type2 keyword	REQUIRED
3648 - 3649	printer-name	name (127)	REQUIRED
3650 - 3651 3652 -	printer-location	text (127)	
3653 3654 -	printer-info	text (127)	
3655	printer-more-info	uri	
3656 - 3657	printer-driver-installer	uri	
3658 - 3659	printer-make-and-model	text (127)	
3660 - 3661 3662 3663 -	printer-more-info- manufacturer	uri	
3664 3665 -	printer-state	type1 enum	REQUIRED
3666 3667 -	printer-state-reasons	1setOf type2 keyword	REQUIRED
3668 3669 -	printer-state-message	text (MAX)	
3670 3671 -	ipp-versions-supported	1setOf type2 keyword	REQUIRED
3672	operations-supported	1setOf type2 enum	REQUIRED
3673 - 3674 3675	ipp-multiple-document-jobs- supported	boolean	
3676 - 3677	charset-configured	charset	REQUIRED
3678 - 3679	charset-supported	1setOf charset	REQUIRED
3680 - 3681	natural-language-configured	naturalLanguage	REQUIRED
3682 - 3683 3684	generated-natural-language- supported	lsetOf naturalLanguage	REQUIRED
3685 - 3686	document-format-default	mimeMediaType	REQUIRED
3687 - 3688	document-format-supported	lsetOf mimeMediaType	REQUIRED

deBry, Hastings, Herriot, Isaacson, Powell

[Page 100]

2690			
3689 3690 3691 3692 3693 3694 3695 3696 3697 3698	printer-is-accepting-jobs	boolean	REQUIRED
	queued-job-count	integer (0:MAX)	REQUIRED
	printer-message-from-   operator	text (127)	
	color-supported	boolean	
3699 3700	reference-uri-schemes-   supported	1setOf uriScheme	
3701 3702	pdl-override-supported	type2 keyword	REQUIRED
3703 3704 3705 3706 3707 3708	printer-up-time	integer (1:MAX)	REQUIRED
	printer-current-time	dateTime	
	multiple-operation-time-out	integer (1:MAX)	
3709 3710	compression-supported	1setOf type3 keyword	REQUIRED
3711 3712	job-k-octets-supported	rangeOfInteger (0:MAX)	
3713 3714 3715 3716 3717 3718 3719 3720 3721	job-impressions-supported	rangeOfInteger (0:MAX)	
	job-media-sheets-supported	rangeOfInteger (0:MAX)	
	pages-per-minute	integer(0:MAX)	
	pages-per-minute-color   +	integer(0:MAX)	

4.4.1 printer-uri-supported (1setOf uri)

3722

3723

3731

This REQUIRED Printer attribute contains at least one URI for the Printer object. It OPTIONALLY contains more than one URI for the Printer object. An administrator determines a Printer object's URI(s) and configures this attribute to contain those URIs by some means outside the scope of this IPP/1.1 document. The precise format of this URI is implementation dependent and depends on the protocol. See the next two sections for a description of the "uri-security-supported" and "uri-authentication-supported" attributes, both of which are the REQUIRED companion attributes to this "printer-uri-supported" attribute. See section 2.4 on Printer object identity and section 8.2 on security and URIs for more information.

4.4.2 uri-authentication-supported (1setOf type2 keyword) Issue 2

This REQUIRED Printer attribute MUST have the same cardinality (contain the same number of values) as the "printer-uri-supported" attribute. This attribute identifies the Client Authentication mechanism

deBry, Hastings, Herriot, Isaacson, Powell

- associated with each URI listed in the "printer-uri-supported" attribute. The Printer object uses the specified mechanism to identify the authenticated user (see section 8.3). The "i th" value in "uri-authenticationsupported" corresponds to the "i th" value in "printer-uri-supported" and it describes the authentication mechanisms used by the Printer when accessed via that URI. See [IPP-PRO] for more details on Client
- 3738 Authentication.

3741

3742

3743

3744

3745

3746

3747

3748

3749

3750

3751

3752

3753

3754

- 3739 The following standard keyword values are defined:
  - 'none': There is no authentication mechanism associated with the URI. The Printer object assumes that the authenticated user is "anonymous".
    - 'requesting-user-name': When a client performs an operation whose target is the associated URI, the Printer object assumes that the authenticated user is specified by the "requesting-user-name" Operation attribute (see section 8.3). If the "requesting-user-name" attribute is absent in a request, the Printer object assumes that the authenticated user is "anonymous".
    - basic': When a client performs an operation whose target is the associated URI, the Printer object challenges the client with HTTP basic authentication. The Printer object assumes that the authenticated user is the name received via the basic authentication mechanism.
    - 'digest': When a client performs an operation whose target is the associated URI, the Printer object challenges the client with HTTP digest authentication. The Printer object assumes that the authenticated user is the name received via the digest authentication mechanism.
    - 'certificate': When a client performs an operation whose target is the associated URI, the Printer object expects the client to provide a certificate. The Printer object assumes that the authenticated user is the textual name contained within the certificate.
- 3755 4.4.3 uri-security-supported (1setOf type2 keyword)
- 3756 This REQUIRED Printer attribute MUST have the same cardinality (contain the same number of values) as
- the "printer-uri-supported" attribute. This attribute identifies the security mechanisms used for each URI
- listed in the "printer-uri-supported" attribute. The "i th" value in "uri-security-supported" corresponds to
- the "i th" value in "printer-uri-supported" and it describes the security mechanisms used for accessing the
- Printer object via that URI. See [IPP-PRO] for more details on security mechanisms.
- The following standard keyword values are defined:
- 'none': There are no secure communication channel protocols in use for the given URI.
- 3763 'ssl3': SSL3 [SSL] is the secure communications channel protocol in use for the given URI.
- itls: TLS [RFC2246] is the secure communications channel protocol in use for the given URI.
- This attribute is orthogonal to the definition of a Client Authentication mechanism. Specifically, 'none' does not exclude Client Authentication. See section 4.4.2. Issue 21
- Consider the following example. For a single Printer object, an administrator configures the "printer-urisupported", "uri-authentication-supported" and "uri-security-supported" attributes as follows:
- "printer-uri-supported": 'xxx://acme.com/open-use-printer', 'xxx://acme.com/restricted-use-printer', 'xxx://acme.com/private-printer'
- "uri-authentication-supported": 'none', 'digest', 'basic'

"uri-security-supported": 'none', 'none', 'tls'

Note: 'xxx' is not a valid scheme. See the IPP/1.1 "Transport and Encoding" document [IPP-PRO] for the actual URI schemes to be used in object target attributes.

In this case, one Printer object has three URIs.

- For the first URI, 'xxx://acme.com/open-use-printer', the value 'none' in "uri-security-supported" indicates that there is no secure channel protocol configured to run under HTTP. The value of 'none' in "uri-authentication-supported" indicates that all users are 'anonymous'. There will be no challenge and the Printer will ignore "requesting-user-name".
- For the second URI, 'xxx://acme.com/restricted-use-printer', the value 'none' in "uri-security-supported" indicates that there is no secure channel protocol configured to run under HTTP. The value of 'digest' in "uri-authentication-supported" indicates that the Printer will issue a challenge and that the Printer will use the name supplied by the digest mechanism to determine the authenticated user (see section 8.3).
- For the third URI, 'xxx://acme.com/private-printer', the value 'tls' in "uri-security-supported" indicates that TLS is being used to secure the channel. The client SHOULD be prepared to use TLS framing to negotiate an acceptable ciphersuite to use while communicating with the Printer object. In this case, the name implies the use of a secure communications channel, but the fact is made explicit by the presence of the 'tls' value in "uri-security-supported". The client does not need to resort to understanding which security it must use by following naming conventions or by parsing the URI to determine which security mechanisms are implied. The value of 'basic' in "uri-authentication-supported" indicates that the Printer will issue a challenge and that the Printer will use the name supplied by the digest mechanism to determine the authenticated user (see section 8.3) . Because this challenge occurs in a tls session, the channel is secure.

It is expected that many IPP Printer objects will be configured to support only one channel (either configured to use TLS access or not) and only one authentication mechanism. Such Printer objects only have one URI listed in the "printer-uri-supported" attribute. No matter the configuration of the Printer object (whether it has only one URI or more than one URI), a client MUST supply only one URI in the target "printer-uri" operation attribute.

4.4.4 printer-name (name(127))

This REQUIRED Printer attribute contains the name of the Printer object. It is a name that is more enduser friendly than a URI. An administrator determines a printer's name and sets this attribute to that name. This name may be the last part of the printer's URI or it may be unrelated. In non-US-English locales, a name may contain characters that are not allowed in a URI.

4.4.5 printer-location (text(127))

This Printer attribute identifies the location of the device. This could include things like: "in Room 123A, second floor of building XYZ".

- 3811 4.4.6 printer-info (text(127))
- This Printer attribute identifies the descriptive information about this Printer object. This could include
- things like: "This printer can be used for printing color transparencies for HR presentations", or "Out of
- courtesy for others, please print only small (1-5 page) jobs at this printer", or even "This printer is going
- away on July 1, 1997, please find a new printer".
- 3816 4.4.7 printer-more-info (uri)
- This Printer attribute contains a URI used to obtain more information about this specific Printer object. For
- example, this could be an HTTP type URI referencing an HTML page accessible to a Web Browser. The
- information obtained from this URI is intended for end user consumption. Features outside the scope of IPP
- can be accessed from this URI. The information is intended to be specific to this printer instance and site
- specific services (e.g. job pricing, services offered, end user assistance). The device manufacturer may
- initially populate this attribute.
- 3823 4.4.8 printer-driver-installer (uri)
- This Printer attribute contains a URI to use to locate the driver installer for this Printer object. This
- attribute is intended for consumption by automata. The mechanics of print driver installation is outside the
- scope of this IPP/1.1 document. The device manufacturer may initially populate this attribute.
- 3827 4.4.9 printer-make-and-model (text(127))
- This Printer attribute identifies the make and model of the device. The device manufacturer may initially
- populate this attribute.
- 3830 4.4.10 printer-more-info-manufacturer (uri)
- This Printer attribute contains a URI used to obtain more information about this type of device. The
- information obtained from this URI is intended for end user consumption. Features outside the scope of
- 3833 IPP can be accessed from this URI (e.g., latest firmware, upgrades, print drivers, optional features available,
- details on color support). The information is intended to be germane to this printer without regard to site
- specific modifications or services. The device manufacturer may initially populate this attribute.
- 3836 4.4.11 printer-state (type1 enum)
- This REQUIRED Printer attribute identifies the current state of the device. The "printer-state reasons"
- attribute augments the "printer-state" attribute to give more detailed information about the Printer in the
- 3839 given printer state.
- A Printer object need only update this attribute before responding to an operation which requests the
- attribute; the Printer object NEED NOT update this attribute continually, since asynchronous event
- notification is not part of IPP/1.1. A Printer NEED NOT implement all values if they are not applicable to
- a given implementation.

3844	The following standard enum values are defined:		
3845	Value	Symbolic Name and Description	
3846 3847 3848 3849 3850 3851	3' '4'	'idle': Indicates that new jobs can start processing without waiting. Issue 31 'processing': Indicates that jobs are processing; new jobs will wait before processing. Issue 31 '5' 'stopped': Indicates that no jobs can be processed and intervention is required. Issue 31	
3852 3853	Values of "printer-state-reasons", such as 'spool-area-full' and 'stopped-partly', MAY be used to provide further information. Issue 31		
3854	4.4.12 printer-state-reasons (1setOf type2 keyword)		
3855 3856	This REQUIRED Printer attribute supplies additional detail about the device's state. Some of the these value definitions indicate conformance requirements; the rest are OPTIONAL. Issue 30		
3857 3858	Each keyword value MAY have a suffix to indicate its level of severity. The three levels are: report (least severe), warning, and error (most severe).		
3859 3860 3861 3862 3863 3864 3865 3866 3867	<ul> <li>- '-report': This suffix indicates that the reason is a "report". An implementation may choose to omit some or all reports. Some reports specify finer granularity about the printer state; others serve as a precursor to a warning. A report MUST contain nothing that could affect the printed output.</li> <li>- '-warning': This suffix indicates that the reason is a "warning". An implementation may choose to omit some or all warnings. Warnings serve as a precursor to an error. A warning MUST contain nothing that prevents a job from completing, though in some cases the output may be of lower quality.</li> <li>- '-error': This suffix indicates that the reason is an "error". An implementation MUST include all errors. If this attribute contains one or more errors, printer MUST be in the stopped state.</li> </ul>		
3868 3869	If the implementation does not add any one of the three suffixes, all parties MUST assume that the reason is an "error".		
3870 3871 3872 3873 3874	If a Printer object controls more than one output device, each value of this attribute MAY apply to one or more of the output devices. An error on one output device that does not stop the Printer object as a whole MAY appear as a warning in the Printer's "printer-state-reasons attribute". If the "printer-state" for such a Printer has a value of 'stopped', then there MUST be an error reason among the values in the "printer-state-reasons" attribute.		
3875	The following	ng standard keyword values are defined:	
3876 3877 3878 3879	'other': The device has detected an error other than one listed in this document. 'none': There are not reasons. This state reason is semantically equivalent to "printer-state-reasons" without any value and MUST be used, since the 1setOf attribute syntax requires at least one value. 'media-needed': A tray has run out of media.		

'media-jam': The device has a media jam.

'moving-to-paused': Someone has paused the Printer object using the Pause-Printer operation (see section 3.2.7) or other means, but the device(s) are taking an appreciable time to stop. Later, when all output has stopped, the "printer-state" becomes 'stopped', and the 'paused' value replaces the 'moving-to-paused' value in the "printer-state-reasons" attribute. This value MUST be supported, if the Pause-Printer operation is supported and the implementation takes significant time to pause a device in certain circumstances. Issue 30

'paused': Someone has paused the Printer object using the Pause-Printer operation (see section 3.2.7) or other means and the Printer object's "printer-state" is 'stopped'. In this state, a Printer MUST NOT produce printed output, but it MUST perform other operations requested by a client. If a Printer had been printing a job when the Printer was paused, the Printer MUST resume printing that job when the Printer is no longer paused and leave no evidence in the printed output of such a pause. This value MUST be supported, if the Pause-Printer operation is supported. Issue 30

'shutdown': Someone has removed a Printer object from service, and the device may be powered down or physically removed. In this state, a Printer object MUST NOT produce printed output, and unless the Printer object is realized by a print server that is still active, the Printer object MUST perform no other operations requested by a client, including returning this value. If a Printer object had been printing a job when it was shutdown, the Printer NEED NOT resume printing that job when the Printer is no longer shutdown. If the Printer resumes printing such a job, it may leave evidence in the printed output of such a shutdown, e.g. the part printed before the shutdown may be printed a second time after the shutdown.

'connecting-to-device': The Printer object has scheduled a job on the output device and is in the process of connecting to a shared network output device (and might not be able to actually start printing the job for an arbitrarily long time depending on the usage of the output device by other servers on the network).

'timed-out': The server was able to connect to the output device (or is always connected), but was unable to get a response from the output device.

'stopping': The Printer object is in the process of stopping the device and will be stopped in a while. When the device is stopped, the Printer object will change the Printer object's state to 'stopped'. The 'stopping-warning' reason is never an error, even for a Printer with a single output device. When an output-device ceases accepting jobs, the Printer will have this reason while the output device completes printing.

'stopped-partly': When a Printer object controls more than one output device, this reason indicates that one or more output devices are stopped. If the reason is a report, fewer than half of the output devices are stopped. If the reason is a warning, fewer than all of the output devices are stopped.

'toner-low': The device is low on toner.

'toner-empty': The device is out of toner.

'spool-area-full': The limit of persistent storage allocated for spooling has been reached. The Printer is temporarily unable to accept more jobs. The Printer will remove this value when it is able to accept more jobs. This value SHOULD be used by a non-spooling Printer that only accepts one or a small number jobs at a time or a spooling Printer that has filled the spool space. Issue 20 Issue 30 and Issue 31

'cover-open': One or more covers on the device are open.

interlock-open': One or more interlock devices on the printer are unlocked.

'door-open': One or more doors on the device are open.

'input-tray-missing': One or more input trays are not in the device.

- 'media-low': At least one input tray is low on media. 3926 'media-empty': At least one input tray is empty. 3927 'output-tray-missing': One or more output trays are not in the device 3928 'output-area-almost-full': One or more output area is almost full (e.g. tray, stacker, collator). 3929 'output-area-full': One or more output area is full. (e.g. tray, stacker, collator) 3930 'marker-supply-low': The device is low on at least one marker supply. (e.g. toner, ink, ribbon) 3931 'marker-supply-empty: The device is out of at least one marker supply. (e.g. toner, ink, ribbon) 3932 'marker-waste-almost-full': The device marker supply waste receptacle is almost full. 3933 'marker-waste-full': The device marker supply waste receptacle is full. 3934 'fuser-over-temp': The fuser temperature is above normal. 3935 'fuser-under-temp': The fuser temperature is below normal. 3936 'opc-near-eol': The optical photo conductor is near end of life. 3937 'opc-life-over': The optical photo conductor is no longer functioning. 3938 'developer-low': The device is low on developer. 3939 'developer-empty: The device is out of developer. 3940
- 3943 4.4.13 printer-state-message (text(MAX))

3955

3956

3957

3958

3959

3960

3961

3962

3963

3964

This Printer attribute specifies the additional information about the printer state and printer state reasons in human readable text. If the Printer object supports this attribute, the Printer object MUST be able to generate this message in any of the natural languages identified by the Printer's "generated-natural-language-supported" attribute (see the "attributes-natural-language" operation attribute specified in Section 3.1.4.1).

interpreter-resource-unavailable': An interpreter resource is unavailable (i.e. font, form)

- 3949 4.4.14 ipp-versions-supported (1setOf type2 keyword) Issue 36
- This REQUIRED attribute identifies the IPP protocol version(s) that this Printer supports, including major and minor versions, i.e., the version numbers for which this Printer implementation meets the conformance requirements. For version number validation, the Printer matches the (two-octet binary) "version-number" parameter supplied by the client in each request (see sections 3.1.1 and 3.1.8) with the (US-ASCII) keyword values of this attribute.
  - The following standard keyword values are defined:
    - '1.0': Meets the conformance requirement of IPP version 1.0 as specified in RFC 2566 [RFC2566] and RFC 2565 [RFC2565] including any extensions registered according to Section 6 and any extension defined in this version or any future version of the IPP "Model and Semantics" document or the IPP "Encoding and Transport" document following the rules, if any, when the "version-number" parameter is '1.0'.
    - '1.1': Meets the conformance requirement of IPP version 1.1 as specified in this document and [IPP-PRO] including any extensions registered according to Section 6 and any extension defined in any future versions of the IPP "Model and Semantics" document or the IPP Encoding and Transport document following the rules, if any, when the "version-number" parameter is '1.1'.

3997

3998

3999

4000

4001

3965 4.4.15 operations-supported (1setOf type2 enum)

This REQUIRED Printer attribute specifies the set of supported operations for this Printer object and contained Job objects.

This attribute is encoded as any other enum attribute syntax according to [IPP-PRO] as 32-bits. However, all 32-bit enum values for this attribute MUST NOT exceed 0x00008FFF, since these same values are also passed in two octets in the "operation-id" parameter (see section 3.1.1) in each Protocol request with the two high order octets omitted in order to indicate the operation being performed [IPP-PRO].

The following standard enum and "operation-id" (see section 3.1.2) values are defined:

3973	Value	Operation Name
3974		
3975		
3976	0x0000	reserved, not used
3977	0x0001	reserved, not used
3978	0x0002	Print-Job
3979	0x0003	Print-URI
3980	0x0004	Validate-Job
3981	0x0005	Create-Job
3982	0x0006	Send-Document
3983	0x0007	Send-URI
3984	0x0008	Cancel-Job
3985	0x0009	Get-Job-Attributes
3986	0x000A	Get-Jobs
3987	0x000B	Get-Printer-Attributes
3988	0x000C	Hold-Job
3989	0x000D	Release-Job
3990	0x000E	Restart-Job
3991	0x000F	reserved for a future operation
3992	0x0010	Pause-Printer
3993	0x0011	Resume-Printer
3994	0x0012	Purge-Jobs
3995	0x00013-0x3FFF	reserved for future operations
3996	0x4000-0x8FFF	reserved for private extensions

The reserved block for private extensions allows for vendors to implement private extensions that are guaranteed to not conflict with future registered extensions. However, there is no guarantee that two or more private extensions will not conflict.

## 4.4.16 multiple-document-jobs-supported (boolean) Issue 34

This Printer attribute indicates whether or not the Printer supports more than one document per job, i.e., more than one Send-Document or Send-Data operation with document data. If the Printer supports the Create-Job and Send-Document operations (see section 3.2.4 and 3.3.1), it MUST support this attribute.

- 4.4.17 charset-configured (charset)
- This REQUIRED Printer attribute identifies the charset that the Printer object has been configured to
- represent 'text' and 'name' Printer attributes that are set by the operator, system administrator, or
- 4008 manufacturer, i.e., for "printer-name" (name), "printer-location" (text), "printer-info" (text), and "printer-
- make-and-model" (text). Therefore, the value of the Printer object's "charset-configured" attribute MUST
- also be among the values of the Printer object's "charset-supported" attribute.
- 4.4.18 charset-supported (1setOf charset)
- This REQUIRED Printer attribute identifies the set of charsets that the Printer and contained Job objects
- support in attributes with attribute syntax 'text' and 'name'. At least the value 'utf-8' MUST be present, since
- 4014 IPP objects MUST support the UTF-8 [RFC2279] charset. If a Printer object supports a charset, it means
- that for all attributes of syntax 'text' and 'name' the IPP object MUST (1) accept the charset in requests and
- return the charset in responses as needed.
- 4017 If more charsets than UTF-8 are supported, the IPP object MUST perform charset conversion between the
- charsets as described in Section 3.1.4.2.
- 4.4.19 natural-language-configured (naturalLanguage)
- This REQUIRED Printer attribute identifies the natural language that the Printer object has been configured
- to represent 'text' and 'name' Printer attributes that are set by the operator, system administrator, or
- manufacturer, i.e., for "printer-name" (name), "printer-location" (text), "printer-info" (text), and "printer-
- make-and-model" (text). When returning these Printer attributes, the Printer object MAY return them in the
- configured natural language specified by this attribute, instead of the natural language requested by the
- client in the "attributes-natural-language" operation attribute. See Section 3.1.4.1 for the specification of
- the OPTIONAL multiple natural language support. Therefore, the value of the Printer object's "natural-
- language-configured" attribute MUST also be among the values of the Printer object's "generated-natural-
- language-supported" attribute.
- 4.4.20 generated-natural-language-supported (1setOf naturalLanguage)
- 4030 This REQUIRED Printer attribute identifies the natural language(s) that the Printer object and contained
- Job objects support in attributes with attribute syntax 'text' and 'name'. The natural language(s) supported
- depends on implementation and/or configuration. Unlike charsets, IPP objects MUST accept requests with
- any natural language or any Natural Language Override whether the natural language is supported or not.
- 4034 If a Printer object supports a natural language, it means that for any of the attributes for which the Printer or
- Job object generates messages, i.e., for the "job-state-message" and "printer-state-message" attributes and
- Operation Messages (see Section 3.1.5) in operation responses, the Printer and Job objects MUST be able
- to generate messages in any of the Printer's supported natural languages. See section 3.1.4 for the definition
- of 'text' and 'name' attributes in operation requests and responses.
- Note: A Printer object that supports multiple natural languages, often has separate catalogs of messages,
- one for each natural language supported.

- 4.4.21 document-format-default (mimeMediaType)
- This REQUIRED Printer attribute identifies the document format that the Printer object has been
- configured to assume if the client does not supply a "document-format" operation attribute in any of the
- operation requests that supply document data. The standard values for this attribute are Internet Media
- types (sometimes called MIME types). For further details see the description of the 'mimeMediaType'
- attribute syntax in Section 4.1.9.
- 4.4.22 document-format-supported (1setOf mimeMediaType)
- This REQUIRED Printer attribute identifies the set of document formats that the Printer object and
- contained Job objects can support. For further details see the description of the 'mimeMediaType' attribute
- syntax in Section 4.1.9.
- 4.4.23 printer-is-accepting-jobs (boolean)
- This REQUIRED Printer attribute indicates whether the printer is currently able to accept jobs, i.e., is
- accepting Print-Job, Print-URI, and Create-Job requests. If the value is 'true', the printer is accepting jobs.
- 4054 If the value is 'false', the Printer object is currently rejecting any jobs submitted to it. In this case, the
- Printer object returns the 'server-error-not-accepting-jobs' status code.
- This value is independent of the "printer-state" and "printer-state-reasons" attributes because its value does
- not affect the current job; rather it affects future jobs. This attribute, when 'false', causes the Printer to
- reject jobs even when the "printer-state" is 'idle' or, when 'true', causes the Printer object to accepts jobs
- even when the "printer-state" is 'stopped'.
- 4.4.24 queued-job-count (integer(0:MAX))
- This REQUIRED Printer attribute contains a count of the number of jobs that are either 'pending',
- 'processing', 'pending-held', or 'processing-stopped' and is set by the Printer object. Issue 29
- 4.4.25 printer-message-from-operator (text(127))
- This Printer attribute provides a message from an operator, system administrator or "intelligent" process to
- indicate to the end user information or status of the printer, such as why it is unavailable or when it is
- expected to be available.
- 4.4.26 color-supported (boolean)
- This Printer attribute identifies whether the device is capable of any type of color printing at all, including
- highlight color. All document instructions having to do with color are embedded within the document PDL
- 4070 (none are external IPP attributes in IPP/1.1).
- Note: end-users are able to determine the nature and details of the color support by querying the "printer-
- 4072 more-info-manufacturer" Printer attribute.

- 4.4.27 reference-uri-schemes-supported (1setOf uriScheme)
- This Printer attribute specifies which URI schemes are supported for use in the "document-uri" operation
- attribute of the Print-URI or Send-URI operation. If a Printer object supports these optional operations, it
- 4076 MUST support the "reference-uri-schemes-supported" Printer attribute with at least the following schemed
- 4077 URI value:
- iftp': The Printer object will use an FTP 'get' operation as defined in RFC 2228 [RFC2228] using FTP URLs as defined by [RFC2396] and [RFC2316].

- The Printer object MAY OPTIONALLY support other URI schemes (see section 4.1.6).
- 4.4.28 pdl-override-supported (type2 keyword)
- This REQUIRED Printer attribute expresses the ability for a particular Printer implementation to either
- attempt to override document data instructions with IPP attributes or not.
- This attribute takes on the following values:
  - 'attempted': This value indicates that the Printer object attempts to make the IPP attribute values take precedence over embedded instructions in the document data, however there is no guarantee.
  - 'not-attempted': This value indicates that the Printer object makes no attempt to make the IPP attribute values take precedence over embedded instructions in the document data.

4089 4090

4086

4087

- Section 15 contains a full description of how this attribute interacts with and affects other IPP attributes, especially the "ipp-attribute-fidelity" attribute.
- 4.4.29 printer-up-time (integer(1:MAX))
- This REQUIRED Printer attribute indicates the amount of time (in seconds) that this Printer instance has
- been up and running. The value is a monotonically increasing value starting from 1 when the Printer object
- is started-up (initialized, booted, etc.). This value is used to populate the Event Time Job Description Job
- attributes "time-at-creation", "time-at-processing", and "time-at-completed" (see section 4.3.14).
- 4098 If the Printer object goes down at some value 'n', and comes back up, the implementation MAY:
- 1. Know how long it has been down, and resume at some value greater than 'n', or
- 4100 2. Restart from 1.
- In other words, if the device or devices that the Printer object is representing are restarted or power cycled,
- the Printer object MAY continue counting this value or MAY reset this value to 1 depending on
- implementation. However, if the Printer object software ceases running, and restarts without knowing the
- last value for "printer-up-time", the implementation MUST reset this value to 1. If this value is reset and
- the Printer has persistent jobs, the Printer MUST reset the "time-at-xxx(integer) Event Time Job
- Description attributes according to Section 4.3.14. Issue 17 An implementation MAY use both
- implementation alternatives, depending on warm versus cold start, respectively.

- 4.4.30 printer-current-time (dateTime)
- This Printer attribute indicates the current date and time. This value is used to populate the Event Time Job
- Description attributes: "time-at-creation", "time-at-processing", and "time-at-completed" (see Section
- 4111 4.3.14).
- The date and time is obtained on a "best efforts basis" and does not have to be that precise in order to work
- in practice. A Printer implementation sets the value of this attribute by obtaining the date and time via
- some implementation-dependent means, such as getting the value from a network time server, initialization
- at time of manufacture, or setting by an administrator. See [IPP-IIG] for examples. If an implementation
- supports this attribute and the implementation knows that it has not yet been set, then the implementation
- 4117 MUST return the value of this attribute using the out-of-band 'no-value' meaning not configured. See the
- beginning of section 4.1. Issue 17
- The time zone of this attribute NEED NOT be the time zone used by people located near the Printer object
- or device. The client MUST NOT expect that the time zone of any received 'dateTime' value to be in the
- time zone of the client or in the time zone of the people located near the printer. Issue 17
- The client SHOULD display any dateTime attributes to the user in client local time by converting the
- 'dateTime' value returned by the server to the time zone of the client, rather than using the time zone
- returned by the Printer in attributes that use the 'dateTime' attribute syntax. Issue 17
- 4.4.31 multiple-operation-time-out (integer(1:MAX))
- This Printer attributes identifies the minimum time (in seconds) that the Printer object waits for additional
- Send-Document or Send-URI operations to follow a still-open multi-document Job object before taking
- any recovery actions, such as the ones indicated in section 3.3.1. If the Printer object supports the Create-
- Job and Send-Document operations (see section 3.2.4 and 3.3.1), it MUST support this attribute.
- It is RECOMMENDED that vendors supply a value for this attribute that is between 60 and 240 seconds.
- An implementation MAY allow a system administrator to set this attribute (by means outside this IPP/1.1
- document). If so, the system administrator MAY be able to set values outside this range.
- 4.4.32 compression-supported (1setOf type3 keyword)
- This REQUIRED Printer attribute identifies the set of supported compression algorithms for document
- data. Compression only applies to the document data; compression does not apply to the encoding of the
- 4136 IPP operation itself. The supported values are used to validate the client supplied "compression" operation
- attributes in Print-Job, Send-Document, and Send-URI requests. Issue 28
- 4138 Standard values are:
- inone': no compression is used.
- 'deflate': ZIP public domain inflate/deflate) compression technology
- 'gzip' GNU zip compression technology described in RFC 1952 [RFC1952].
- 'compress': UNIX compression technology

- 4.4.33 job-k-octets-supported (rangeOfInteger(0:MAX))
- This Printer attribute specifies the upper and lower bounds of total sizes of jobs in K octets, i.e., in units of
- 4146 1024 octets. The supported values are used to validate the client supplied "job-k-octets" operation attributes
- in create requests. The corresponding job description attribute "job-k-octets" is defined in section 4.3.17.1.
- 4.4.34 job-impressions-supported (rangeOfInteger(0:MAX))
- This Printer attribute specifies the upper and lower bounds for the number of impressions per job. The
- supported values are used to validate the client supplied "job-impressions" operation attributes in create
- requests. The corresponding job description attribute "job-impressions" is defined in section 4.3.17.2.
- 4.4.35 job-media-sheets-supported (rangeOfInteger(0:MAX))
- This Printer attribute specifies the upper and lower bounds for the number of media sheets per job. The
- supported values are used to validate the client supplied "job-media-sheets" operation attributes in create
- requests. The corresponding Job attribute "job-media-sheets" is defined in section 4.3.17.3.
- 4.4.36 pages-per-minute (integer(0:MAX))
- This Printer attributes specifies the nominal number of pages per minute to the nearest whole number which
- may be generated by this printer (e.g., simplex, black-and-white). This attribute is informative, not a
- service guarantee. Generally, it is the value used in the marketing literature to describe the device.
- A value of 0 indicates a device that takes more than two minutes to process a page.
- 4.4.37 pages-per-minute-color (integer(0:MAX))
- This Printer attributes specifies the nominal number of pages per minute to the nearest whole number which
- may be generated by this printer when printing color (e.g., simplex, color). For purposes of this attribute,
- "color" means the same as for the "color-supported" attribute, namely, the device is capable of any type of
- color printing at all, including highlight color. This attribute is informative, not a service guarantee.
- Generally, it is the value used in the marketing literature to describe the color capabilities of this device.
- A value of 0 indicates a device that takes more than two minutes to process a page.
- 4168 If a color device has several color modes, it MAY use the pages-per-minute value for this attribute that
- corresponds to the mode that produces the highest number.
- Black and white only printers MUST NOT support this attribute. If this attribute is present, then the "color-
- supported" Printer description attribute MUST be present and have a 'true' value.
- The values of these two attributes returned by the Get-Printer-Attributes operation MAY be affected by the
- "document-format" attribute supplied by the client in the Get-Printer-Attributes request. In other words, the
- implementation MAY have different speeds depending on the document format being processed. See
- section 3.2.5.1 Get-Printer-Attributes.

#### 4176 5. Conformance

4180

4184

4185

- This section describes conformance issues and requirements. This document introduces model entities such
- as objects, operations, attributes, attribute syntaxes, and attribute values. These conformance sections
- describe the conformance requirements which apply to these model entities.

## 5.1 Client Conformance Requirements

- This section describes the conformance requirements for a client (see section 2.1), whether it be:
- 1. contained within software controlled by an end user, e.g. activated by the "Print" menu item in an application that sends IPP requests or
  - 2. the print server component that sends IPP requests to either an output device or another "downstream" print server. Issue 4
- 4186 A conforming client MUST support all REQUIRED operations as defined in this document. For each
- attribute included in an operation request, a conforming client MUST supply a value whose type and value
- syntax conforms to the requirements of the Model document as specified in Sections 3 and 4. A
- conforming client MAY supply any registered extensions and/or private extensions in an operation request,
- as long as they meet the requirements in Section 6.
- Otherwise, there are no conformance requirements placed on the user interfaces provided by IPP clients or
- their applications. For example, one application might not allow an end user to submit multiple documents
- per job, while another does. One application might first query a Printer object in order to supply a graphical
- user interface (GUI) dialogue box with supported and default values whereas a different implementation
- 4195 might not.
- When sending a request, an IPP client NEED NOT supply any attributes that are indicated as
- 4197 OPTIONALLY supplied by the client.
- A client MUST be able to accept any of the attribute syntaxes defined in Section 4.1, including their full
- range, that may be returned to it in a response from a Printer object. In particular for each attribute that the
- client supports whose attribute syntax is 'text', the client MUST accept and process both the
- itextWithoutLanguage' and 'textWithLanguage' forms. Similarly, for each attribute that the client supports
- whose attribute syntax is 'name', the client MUST accept and process both the 'nameWithoutLanguage' and
- 'nameWithLanguage' forms. For presentation purposes, truncation of long attribute values is not
- recommended. A recommended approach would be for the client implementation to allow the user to scroll
- 4205 through long attribute values.
- A response MAY contain attribute groups, attributes, attribute syntaxes, values, and status codes that the
- client does not expect. Therefore, a client implementation MUST gracefully handle such responses and not
- refuse to inter-operate with a conforming Printer that is returning registered or private extensions, including
- attribute groups, attributes, attribute syntaxes, attribute values, and status codes that conform to Section 6.
- Clients may choose to ignore any parameters, attributes, attribute syntaxes, or values that they do not
- understand. Issue 25 and Issue 26

- While a client is sending data to a printer, it SHOULD do its best to prevent a channel from being closed by
- a lower layer when the channel is blocked (i.e. flow-controlled off) for whatever reason, e.g. 'out of paper'
- or job ahead hasn't freed up enough memory'. However, the layer that launched the print submission (e.g.
- an end user) MAY close the channel in order to cancel the job. When a client closes a channel, a Printer
- MAY print all or part of the received portion of the document. See the "Encoding and Transport" document
- 4217 [IPP-PRO] for more details. Issue 4 and Issue 5
- A client MUST support Client Authentication as defined in the IPP/1.1 Encoding and Transport document
- [IPP-PRO]. A client SHOULD support Operation Privacy and Server Authentication as defined in the
- 4220 IPP/1.1 Encoding and Transport document [IPP-PRO]. See also section 8 of this document. Issue 32
- 5.2 IPP Object Conformance Requirements
- This section specifies the conformance requirements for conforming implementations of IPP objects (see
- section 2). These requirements apply to an IPP object whether it is:
- (1) an (embedded) device component that accepts IPP requests and controls the device or
- (2) a component of a print server that accepts IPP requests (where the print server control one or more networked devices using IPP or other protocols). Issue 4
- 4227 5.2.1 Objects
- 4228 Conforming implementations MUST implement all of the model objects as defined in this document in the
- 4229 indicated sections:
- Section 2.1 Printer Object
- Section 2.2 Job Object
- 4232 5.2.2 Operations
- 4233 Conforming IPP object implementations MUST implement all of the REQUIRED model operations,
- including REQUIRED responses, as defined in this document in the indicated sections:
- 4235 For a Printer object:

Print-URI (section 3.2.2) OPTION	AL
4237 Print-URI (section 3.2.2) OPTION	
Validate-Job (section 3.2.3) REQUIR	ED
Create-Job (section 3.2.4) OPTION	AL
Get-Printer-Attributes (section 3.2.5) REQUIR	ED
Get-Jobs (section 3.2.6) REQUIR	ED
Pause-Printer (section 3.2.7) OPTION	AL
Resume-Printer (section 3.2.8) OPTION	AL
Purge-Jobs (section 3.2.9) OPTION	AL

4246 For a Job object:

4245

4247 Send-Document (section 3.3.1) OPTIONAL

deBry, Hastings, Herriot, Isaacson, Powell

[Page 115]

4248	Send-URI (section 3.3.2)	OPTIONAL
4249	Cancel-Job (section 3.3.3)	REQUIRED
4250	Get-Job-Attributes (section 3.3.4)	REQUIRED
4251	Hold-Job (section 3.3.5)	OPTIONAL
4252	Release-Job (section 3.3.6)	OPTIONAL
4253	Restart-Job (section 3.3.7)	OPTIONAL

- Conforming IPP objects MUST support all REQUIRED operation attributes and all values of such attributes if so indicated in the description. Conforming IPP objects MUST ignore all unsupported or unknown operation attributes or operation attribute groups received in a request, but MUST reject a request that contains a supported operation attribute that contains an unsupported value.
- Conforming IPP objects MAY return operation responses that contain attributes groups, attributes names, attribute syntaxes, attribute values, and status codes that are extensions to this standard. The additional attribute groups MAY occur in any order. Issue 26
- The following section on object attributes specifies the support required for object attributes.
- 5.2.3 IPP Object Attributes
- Conforming IPP objects MUST support all of the REQUIRED object attributes, as defined in this document in the indicated sections.
- If an object supports an attribute, it MUST support only those values specified in this document or through the extension mechanism described in section 5.2.4. It MAY support any non-empty subset of these values.
- That is, it MUST support at least one of the specified values and at most all of them.
- 4269 5.2.4 Versions
- Clients MUST meet the conformance requirements for clients specified in this document and [IPP-PRO] and SHOULD also support version 1.0, i.e., SHOULD meet the conformance requirements for clients as
- specified in [RFC2566] and [RFC2565].
- 4273 IPP Printer and Job objects MUST meet the conformance requirements for IPP objects specified in this
- document and [IPP-PRO]. For interoperability with IPP/1.0 clients, IPP/1.1 objects SHOULD also meet
- the conformance requirements for IPP objects as specified in [RFC2566] and [RFC2565].
- Clients MUST send requests containing a "version-number" parameter with a '1.1' value and SHOULD try
- supplying alternate version numbers if they receive a 'server-error-version-not-supported' error return in a
- 4278 response.
- 4279 IPP objects MUST accept requests containing a "version-number" parameter with a '1.1' value (or reject the
- request if the operation is not supported). IPP objects SHOULD accept any request with the major version
- '1' (or reject the request if the operation is not supported). See section 3.1.8. **ISSUE 36**

- 4282 5.2.5 Extensions
- A conforming IPP object MAY support registered extensions and private extensions, as long as they meet
- the requirements specified in Section 6.
- For each attribute included in an operation response, a conforming IPP object MUST return a value whose
- type and value syntax conforms to the requirement of the Model document as specified in Sections 3 and 4.
- 4287 5.2.6 Attribute Syntaxes
- An IPP object MUST be able to accept any of the attribute syntaxes defined in Section 4.1, including their
- full range, in any operation in which a client may supply attributes or the system administrator may
- configure attributes (by means outside the scope of this IPP/1.1 document). In particular for each attribute
- that the IPP object supports whose attribute syntax is 'text', the IPP object MUST accept and process both
- the 'textWithoutLanguage' and 'textWithLanguage' forms. Similarly, for each attribute that the IPP object
- supports whose attribute syntax is 'name', the IPP object MUST accept and process both the
- 'nameWithoutLanguage' and 'nameWithLanguage' forms. Furthermore, an IPP object MUST return
- attributes to the client in operation responses that conform to the syntax specified in Section 4.1, including
- their full range if supplied previously by a client.
- 4297 5.2.7 Security Issue 32
- 4298 An IPP Printer implementation SHOULD contain support for Client Authentication as defined in the
- 4299 IPP/1.1 Encoding and Transport document [IPP-PRO]. A Printer implementation MAY allow an
- administrator to configure the Printer so that all, some, or none of the users are authenticated. See also
- section 8 of this document.
- 4302 An IPP Printer implementation SHOULD contain support for Operation Privacy and Server Authentication
- as defined in the IPP/1.1 Encoding and Transport document [IPP-PRO]. A Printer implementation MAY
- allow an administrator to configure the degree of support for Operation Privacy and Server Authentication.
- See also section 8 of this document.
- Security MUST NOT be compromised when a client supplies a lower "version-number" parameter in a
- request. For example, if an IPP/1.1 conforming Printer object accepts version '1.0' requests and is
- configured to enforce Digest Authentication, it MUST do the same for a version '1.0' request.
- 4309 5.3 Charset and Natural Language Requirements
- All clients and IPP objects MUST support the 'utf-8' charset as defined in section 4.1.7.
- 4311 IPP objects MUST be able to accept any client request which correctly uses the "attributes-natural-
- language" operation attribute or the Natural Language Override mechanism on any individual attribute
- whether or not the natural language is supported by the IPP object. If an IPP object supports a natural
- language, then it MUST be able to translate (perhaps by table lookup) all generated 'text' or 'name' attribute
- values into one of the supported languages (see section 3.1.4). That is, the IPP object that supports a

natural language NEED NOT be a general purpose translator of any arbitrary 'text' or 'name' value supplied 4316 by the client into that natural language. However, the object MUST be able to translate (automatically 4317 generate) any of its own attribute values and messages into that natural language. 4318 6. IANA Considerations (registered and private extensions) 4319 This section describes how IPP can be extended to allow the following registered and private extensions to 4320 IPP: 4321 1. keyword attribute values 4322 2. enum attribute values 4323 3. attributes 4324 4. attribute syntaxes 4325 5. operations 4326 6. attribute groups 4327 7. status codes 4328 4329 Extensions registered for use with IPP/1.1 are OPTIONAL for client and IPP object conformance to the 4330 IPP/1.1 Model document. 4331 4332 These extension procedures are aligned with the guidelines as set forth by the IESG [IANA-CON]. Section 11 describes how to propose new registrations for consideration. IANA will reject registration proposals 4333 that leave out required information or do not follow the appropriate format described in Section 11. IPP/1.1 4334 may also be extended by an appropriate RFC that specifies any of the above extensions. 4335 6.1 Typed 'keyword' and 'enum' Extensions 4336 IPP allows for 'keyword' and 'enum' extensions (see sections 4.1.2.3 and 4.1.4). This document uses 4337 prefixes to the 'keyword' and 'enum' basic attribute syntax type in order to communicate extra information 4338 to the reader through its name. This extra information is not represented in the protocol because it is 4339 unimportant to a client or Printer object. The list below describes the prefixes and their meaning. 4340 "type1": This IPP specification document must be revised to add a new keyword or a new enum. No 4341 private keywords or enums are allowed. 4342 4343 "type2": Implementers can, at any time, add new keyword or enum values by proposing the complete

specification to IANA:

4344

	iono Qiono ono
4347	iana@iana.org
4348	IANA will forward the registration proposal to the IPP Designated Expert who will review the
4349	proposal with a mailing list that the Designated Expert keeps for this purpose. Initially, that list will
4350	be the mailing list used by the IPP WG:
4351	be the manning list used by the HT WG.
4352	inn@nwa ora
4353 4354	ipp@pwg.org
4355	even after the IPP WG is disbanded as permitted by [IANA-CON]. The IPP Designated Expert is
4356	appointed by the IESG Area Director responsible for IPP, according to [IANA-CON].
4357	appointed by the 1250 field Director responsible for if 1, decording to [In 1171 Corv].
4358	When a type2 keyword or enum is approved, the IPP Designated Expert becomes the point of
4359	contact for any future maintenance that might be required for that registration.
4360	contact for any factore mannerance that might be required for that registration.
4361	"type3": Implementers can, at any time, add new keyword and enum values by submitting the complete
4362	specification to IANA as for type2 who will forward the proposal to the IPP Designated Expert.
4363	While no additional technical review is required, the IPP Designated Expert may, at his/her
4364	discretion, forward the proposal to the same mailing list as for type2 registrations for advice and
4365	comment.
4366	
4367	When a type3 keyword or enum is approved by the IPP Designated Expert, the original proposer
4368	becomes the point of contact for any future maintenance that might be required for that registration.
4369	
4370	For type2 and type3 keywords, the proposer includes the name of the keyword in the registration proposal
4371	and the name is part of the technical review.
4372	After type2 and type3 enums specifications are approved, the IPP Designated Expert in consultation with
4373	IANA assigns the next available enum number for each enum value.
4374	IANA will publish approved type2 and type3 keyword and enum attributes value registration specifications
4375	in:
4070	111.
4376	ftp.isi.edu/iana/assignments/ipp/attribute-values/xxx/yyy.txt
4377	where xxx is the attribute name that specifies the initial values and yyy.txt is a descriptive file name that
4378	contains one or more enums or keywords approved at the same time. For example, if several additional
4379	enums for stapling are approved for use with the "finishings" attribute (and "finishings-default" and
4380	"finishings-supported" attributes), IANA will publish the additional values in the file:
4381	ftp.isi.edu/iana/assignments/ipp/attribute-values/finishings/stapling.txt
4382	Note: Some attributes are defined to be: 'type3 keywords'   'name' which allows for attribute values to be
4383	extended by a site administrator with administrator defined names. Such names are not registered with

IANA.

- By definition, each of the three types above assert some sort of registry or review process in order for
- extensions to be considered valid. Each higher numbered level (1, 2, 3) tends to be decreasingly less
- stringent than the previous level. Therefore, any typeN value MAY be registered using a process for some
- 4388 typeM where M is less than N, however such registration is NOT REQUIRED. For example, a type3 value
- MAY be registered in a type 1 manner (by being included in a future version of an IPP specification),
- however, it is NOT REQUIRED.
- This document defines keyword and enum values for all of the above types, including type3 keywords.
- For private (unregistered) keyword extensions, implementers SHOULD use keywords with a suitable
- distinguishing prefix, such as "xxx-" where xxx is the (lowercase) fully qualified company name registered
- with IANA for use in domain names [RFC1035]. For example, if the company XYZ Corp. had obtained
- the domain name "XYZ.com", then a private keyword 'abc' would be: 'xyz.com-abc'.
- Note: RFC 1035 [RFC1035] indicates that while upper and lower case letters are allowed in domain names,
- no significance is attached to the case. That is, two names with the same spelling but different case are to
- be treated as if identical. Also, the labels in a domain name must follow the rules for ARPANET host
- names: They must start with a letter, end with a letter or digit, and have as interior characters only letters,
- digits, and hyphen. Labels must be 63 characters or less. Labels are separated by the "." character.
- For private (unregistered) enum extension, implementers MUST use values in the reserved integer range
- which is 2\*\*30 to 2\*\*31-1.
- 4403 6.2 Attribute Extensibility
- Attribute names are type2 keywords. Therefore, new attributes may be registered and have the same status
- as attributes in this document by following the type2 extension rules. For private (unregistered) attribute
- extensions, implementers SHOULD use keywords with a suitable distinguishing prefix as described in
- 4407 Section 6.1.
- 4408 IANA will publish approved attribute registration specifications as separate files:
- 4409 ftp.isi.edu/iana/assignments/ipp/attributes/xxx-yyy.txt
- where "xxx-yyy" is the new attribute name.
- If a new Printer object attribute is defined and its values can be affected by a specific document format, its
- specification needs to contain the following sentence:
- "The value of this attribute returned in a Get-Printer-Attributes response MAY depend on the
- "document-format" attribute supplied (see Section 3.2.5.1)."
- If the specification does not, then its value in the Get-Printer-Attributes response MUST NOT depend on
- the "document-format" supplied in the request. When a new Job Template attribute is registered, the value
- of the Printer attributes MAY vary with "document-format" supplied in the request without the
- specification having to indicate so.

- 4419 6.3 Attribute Syntax Extensibility
- Attribute syntaxes are like type2 enums. Therefore, new attribute syntaxes may be registered and have the
- same status as attribute syntaxes in this document by following the type2 extension rules described in
- Section 6.1. The value codes that identify each of the attribute syntaxes are assigned in the "Encoding and
- Transport" document [IPP-PRO], including a designated range for private, experimental use.
- 4424 For attribute syntaxes, the IPP Designated Expert in consultation with IANA assigns the next attribute
- syntax code in the appropriate range as specified in [IPP-PRO]. IANA will publish approved attribute
- syntax registration specifications as separate files:
- 4427 ftp.isi.edu/iana/assignments/ipp/attribute-syntaxes/xxx-yyy.txt
- where 'xxx-yyy' is the new attribute syntax name.
- 6.4 Operation Extensibility
- Operations may also be registered following the type2 procedures described in Section 6.1, though major
- new operations will usually be done by a new standards track RFC that augments this document. For
- private (unregistered) operation extensions, implementers MUST use the range for the "operation-id" in
- requests specified in Section 4.4.15 "operations-supported" Printer attribute.
- 4434 For operations, the IPP Designated Expert in consultation with IANA assigns the next operation-id code as
- specified in Section 4.4.15. IANA will publish approved operation registration specifications as separate
- 4436 files:
- 4437 ftp.isi.edu/iana/assignments/ipp/operations/Xxx-Yyy.txt
- where "Xxx-Yyy" is the new operation name.
- 4439 6.5 Attribute Groups
- Attribute groups passed in requests and responses may be registered following the type2 procedures
- described in Section 6.1. The tags that identify each of the attribute groups are assigned in [IPP-PRO].
- 4442 For attribute groups, the IPP Designated Expert in consultation with IANA assigns the next attribute group
- tag code in the appropriate range as specified in [IPP-PRO]. IANA will publish approved attribute group
- registration specifications as separate files:
- 4445 ftp.isi.edu/iana/assignments/ipp/attribute-group-tags/xxx-yyy-tag.txt
- where 'xxx-yyy-tag' is the new attribute group tag name.

# 4447 6.6 Status Code Extensibility

- Operation status codes may also be registered following the type2 procedures described in Section 6.1. The values for status codes are allocated in ranges as specified in Section 14 for each status code class:
- "informational" Request received, continuing process
- "successful" The action was successfully received, understood, and accepted
- "redirection" Further action must be taken in order to complete the request
- "client-error" The request contains bad syntax or cannot be fulfilled
- "server-error" The IPP object failed to fulfill an apparently valid request

- For private (unregistered) operation status code extensions, implementers MUST use the top of each range as specified in Section 13.
- For operation status codes, the IPP Designated Expert in consultation with IANA assigns the next status code in the appropriate class range as specified in Section 13. IANA will publish approved status code
- registration specifications as separate files:
- 4461 ftp.isi.edu/iana/assignments/ipp/status-codes/xxx-yyy.txt
- where "xxx-yyy" is the new operation status code keyword.
- 4463 6.7 Registration of MIME types/sub-types for document-formats
- The "document-format" attribute's syntax is 'mimeMediaType'. This means that valid values are Internet
- Media Types (see Section 4.1.9). RFC 2045 [RFC2045] defines the syntax for valid Internet media types.
- 4466 IANA is the registry for all Internet media types.
- 6.8 Registration of charsets for use in 'charset' attribute values
- The "attributes-charset" attribute's syntax is 'charset'. This means that valid values are charsets names.
- When a charset in the IANA registry has more than one name (alias), the name labeled as "(preferred
- MIME name)", if present, MUST be used (see Section 4.1.7). IANA is the registry for charsets following
- the procedures of [RFC2278].
- 4472 7. Internationalization Considerations
- Some of the attributes have values that are text strings and names which are intended for human
- understanding rather than machine understanding (see the 'text' and 'name' attribute syntaxes in Sections
- 4475 4.1.1 and 4.1.2).
- In each operation request, the client
- identifies the charset and natural language of the request which affects each supplied 'text' and 'name' attribute value, and

- requests the charset and natural language for attributes returned by the IPP object in operation responses (as described in Section 3.1.4.1).

448044814482

4483

- In addition, the client MAY separately and individually identify the Natural Language Override of a supplied 'text' or 'name' attribute using the 'textWithLanguage' and 'nameWithLanguage' technique described section 4.1.1.2 and 4.1.2.2 respectively.
- All IPP objects MUST support the UTF-8 [RFC2279] charset in all 'text' and 'name' attributes supported. If an IPP object supports more than the UTF-8 charset, the object MUST convert between them in order to return the requested charset to the client according to Section 3.1.4.2. If an IPP object supports more than one natural language, the object SHOULD return 'text' and 'name' values in the natural language requested
- where those values are generated by the Printer (see Section 3.1.4.1).
- For Printers that support multiple charsets and/or multiple natural languages in 'text' and 'name' attributes, different jobs may have been submitted in differing charsets and/or natural languages. All responses MUST
- be returned in the charset requested by the client. However, the Get-Jobs operation uses the
- 'textWithLanguage' and 'nameWithLanguage' mechanism to identify the differing natural languages with
- each job attribute returned.
- The Printer object also has configured charset and natural language attributes. The client can query the
- Printer object to determine the list of charsets and natural languages supported by the Printer object and
- what the Printer object's configured values are. See the "charset-configured", "charset-supported", "natural-
- language-configured", and "generated-natural-language-supported" Printer description attributes for more
- 4499 details.
- The "charset-supported" attributed identifies the supported charsets. If a charset is supported, the IPP
- object MUST be capable of converting to and from that charset into any other supported charset. In many
- cases, an IPP object will support only one charset and it MUST be the UTF-8 charset.
- The "charset-configured" attribute identifies the one supported charset which is the native charset given the
- current configuration of the IPP object (administrator defined).
- The "generated-natural-language-supported" attribute identifies the set of supported natural languages for
- generated messages; it is not related to the set of natural languages that must be accepted for client supplied
- 4507 'text' and 'name' attributes. For client supplied 'text' and 'name' attributes, an IPP object MUST accept ALL
- supplied natural languages. Just because a Printer object is currently configured to support 'en-us' natural
- language does not mean that the Printer object should reject a job if the client supplies a job name that is in
- 4510 'fr-ca'.
- The "natural-language-configured" attribute identifies the one supported natural language for generated
- messages which is the native natural language given the current configuration of the IPP object
- 4513 (administrator defined).
- Attributes of type 'text' and 'name' are populated from different sources. These attributes can be categorized
- into following groups (depending on the source of the attribute):

- 1. Some attributes are supplied by the client (e.g., the client supplied "job-name", "document-name", and "requesting-user-name" operation attributes along with the corresponding Job object's "job-name" and "job-originating-user-name" attributes). The IPP object MUST accept these attributes in any natural language no matter what the set of supported languages for generated messages
- 2. Some attributes are supplied by the system administrator (e.g., the Printer object's "printer-name" and "printer-location" attributes). These too can be in any natural language. If the natural language for these attributes is different than what a client requests, then they must be reported using the Natural Language Override mechanism.
- 3. Some attributes are supplied by the device manufacturer (e.g., the Printer object's "printer-make-and-model" attribute). These too can be in any natural language. If the natural language for these attributes is different than what a client requests, then they must be reported using the Natural Language Override mechanism.
- 4. Some attributes are supplied by the operator (e.g., the Job object's "job-message-from-operator" attribute). These too can be in any natural language. If the natural language for these attributes is different than what a client requests, then they must be reported using the Natural Language Override mechanism.
- 5. Some attributes are generated by the IPP object (e.g., the Job object's "job-state-message" attribute, the Printer object's "printer-state-message" attribute, and the "status-message" operation attribute). These attributes can only be in one of the "generated-natural-language-supported" natural languages. If a client requests some natural language for these attributes other than one of the supported values, the IPP object SHOULD respond using the value of the "natural-language-configured" attribute (using the Natural Language Override mechanism if needed).

The 'text' and 'name' attributes specified in this version of this document (additional ones will be registered according to the procedures in Section 6) are:

Attributes	Source
Operation Attributes:	
job-name (name)	client
document-name (name)	client
requesting-user-name (name)	client
status-message	Job or Printer object
Job Template Attributes:	
job-hold-until (keyword   name)	client matches administrator-configured
job-hold-until-default (keyword   name)	client matches administrator-configured
job-hold-until-supported (keyword   name)	client matches administrator-configured
job-sheets (keyword   name)	client matches administrator-configured
job-sheets-default (keyword   name)	client matches administrator-configured
job-sheets-supported (keyword   name)	client matches administrator-configured
media (keyword   name)	client matches administrator-configured
media-default (keyword   name)	client matches administrator-configured
media-supported (keyword   name)	client matches administrator-configured
media-ready (keyword   name)	client matches administrator-configured

Job Description Attributes:	
job-name (name)	client or Printer object
job-originating-user-name (name)	Printer object
job-state-message (text)	Job or Printer object
output-device-assigned (name(127))	administrator
job-message-from-operator (text(127))	operator
Printer Description Attributes:	
printer-name (name(127))	administrator
printer-location (text(127))	administrator
printer-info (text(127))	administrator
printer-make-and-model (text(127))	administrator or manufacturer
printer-state-message (text)	Printer object
printer-message-from-operator (text(127))	operator

# 8. Security Considerations

It is difficult to anticipate the security risks that might exist in any given IPP environment. For example, if IPP is used within a given corporation over a private network, the risks of exposing document data may be low enough that the corporation will choose not to use encryption on that data. However, if the connection between the client and the IPP object is over a public network, the client may wish to protect the content of the information during transmission through the network with encryption.

Furthermore, the value of the information being printed may vary from one IPP environment to the next. Printing payroll checks, for example, would have a different value than printing public information from a file. There is also the possibly of denial-of-service attacks, but denial-of-service attacks against printing resources are not well understood and there is no published precedents regarding this scenario.

Once the authenticated identity of the requester has been supplied to the IPP object, the object uses that identity to enforce any authorization policy that might be in place. For example, one site's policy might be that only the job owner is allowed to cancel a job. The details and mechanisms to set up a particular access control policy are not part of IPP/1.1, and must be established via some other type of administrative or access control framework. However, there are operation status codes that allow an IPP server to return information back to a client about any potential access control violations for an IPP object.

During a create operation, the client's identity is recorded in the Job object in an implementation-defined attribute. This information can be used to verify a client's identity for subsequent operations on that Job object in order to enforce any access control policy that might be in effect. See section 8.3 below for more details.

Since the security levels or the specific threats that any given IPP system administrator may be concerned with cannot be anticipated, IPP MUST be capable of operating with different security mechanisms and

- security policies as required by the individual installation. Security policies might vary from very strong, to very weak, to none at all, and corresponding security mechanisms will be required.
- 4565 8.1 Security Scenarios
- The following sections describe specific security attacks for IPP environments. Where examples are
- provided they should be considered illustrative of the environment and not an exhaustive set. Not all of
- these environments will necessarily be addressed in initial implementations of IPP.
- 8.1.1 Client and Server in the Same Security Domain
- This environment is typical of internal networks where traditional office workers print the output of
- personal productivity applications on shared work-group printers, or where batch applications print their
- output on large production printers. Although the identity of the user may be trusted in this environment, a
- user might want to protect the content of a document against such attacks as eavesdropping, replaying or
- 4574 tampering.
- 8.1.2 Client and Server in Different Security Domains
- Examples of this environment include printing a document created by the client on a publicly available
- printer, such as at a commercial print shop; or printing a document remotely on a business associate's
- printer. This latter operation is functionally equivalent to sending the document to the business associate as
- a facsimile. Printing sensitive information on a Printer in a different security domain requires strong
- security measures. In this environment authentication of the printer is required as well as protection against
- unauthorized use of print resources. Since the document crosses security domains, protection against
- eavesdropping and document tampering are also required. It will also be important in this environment to
- protect Printers against "spamming" and malicious document content.
- 8.1.3 Print by Reference
- When the document is not stored on the client, printing can be done by reference. That is, the print request
- can contain a reference, or pointer, to the document instead of the actual document itself (see sections 3.2.2
- and 3.3.2). Standard methods currently do not exist for remote entities to "assume" the credentials of a
- client for forwarding requests to a 3rd party. It is anticipated that Print-By-Reference will be used to access
- "public" documents and that sophisticated methods for authenticating "proxies" is not specified in this
- 4590 document.
- 4591 8.2 URIs in Operation, Job, and Printer attributes
- The "printer-uri-supported" attribute contains the Printer object's URI(s). Its companion attribute, "uri-
- security-supported", identifies the security mechanism used for each URI listed in the "printer-uri-
- supported" attribute. For each Printer operation request, a client MUST supply only one URI in the
- "printer-uri" operation attribute. In other words, even though the Printer supports more than one URI, the
- client only interacts with the Printer object using one if its URIs. This duality is not needed for Job objects,

since the Printer objects is the factory for Job objects, and the Printer object will generate the correct URI 4597 for new Job objects depending on the Printer object's security configuration. 4598

8.3 URIs for each authentication mechanisms

- Each URI has an authentication mechanism associated with it. If the URI is the i'th element of "printer-uri-4600 supported", then authentication mechanism is the "i th" element of "uri-authentication-supported". For a list 4601 of possible authentication mechanisms, see section 4.4.2. 4602
- The Printer object uses an authentication mechanism to determine the name of the user performing an 4603 operation. This user is called the "authenticated user". The credibility of authentication depends on the 4604 mechanism that the Printer uses to obtain the user's name. When the authentication mechanism is 'none', all 4605 authenticated users are "anonymous". 4606
- During job creation operations, the Printer initializes the value of the "job-originating-user-name" attribute 4607 (see section 4.3.6) to be the authenticated user. The authenticated user is this case is called the "job-owner". 4608
- If an implementation can be configured to support more than one authentication mechanism, then it MUST 4609 implement rules for determining equality of authenticated user names which have been authenticated via 4610 different authentication mechanisms. One possible policy is that identical names that are authenticated via 4611
- different mechanism are different. For example, a user can cancel his job only if he uses the same 4612
- authentication mechanism for both Cancel-Job and Print-Job. Another policy is that identical names that 4613
- are authenticated via different mechanism are the same if the authentication mechanism for the later 4614
- operation is not less strong than the authentication mechanism for the earlier job creation operation. For 4615
- example, a user can cancel his job only if he uses the same or stronger authentication mechanism for 4616
- Cancel-Job and Print-Job. With this second policy a job submitted via 'requesting-user-name' authentication 4617
- could be cancelled via 'digest' authentication. With the first policy, the job could not be cancelled in this 4618
- way. 4619

4624

4625

4626

4627

4628

4629

4630

4599

- A client is able to determine the authentication mechanism used to create a job. It is the i'th value of the 4620
- Printer's "uri-authentication-supported" attribute (see section 4.4.2), where i is the index of the element of 4621
- the Printer's "printer-uri-supported" attribute (see section 4.4.1) equal to the job's "job-printer-uri" attribute 4622
- (see section 4.3.3). 4623

8.4 Restricted Queries

In many IPP operations, a client supplies a list of attributes to be returned in the response. For security reasons, an IPP object may be configured not to return all attributes (or all values) that a client requests. The job attributes returned MAY depend on whether the requesting user is the same as the user that submitted the job. The IPP object MAY even return none of the requested attributes. In such cases, the

- status returned is the same as if the object had returned all requested attributes. The client cannot tell by 4631 such a response whether the requested attribute was present or absent on the object. 4632
- 8.5 Operations performed by operators and system administrators 4633
- For the three printer operations Pause-Printer, Resume-Printer, and Purge-Jobs (see sections 3.2.7, 3.2.8 and 4634
- 3.2.9), the requesting user is intended to be an operator or administrator of the Printer object (see section 1). 4635
- For operations on jobs, the requesting user is intended to be the job owner or may be an operator or 4636
- administrator of the Printer object. The means for authorizing an operator or administrator of the Printer 4637
- object are not specified in this document. 4638
- 8.6 Queries on jobs submitted using non-IPP protocols 4639
- If the device that an IPP Printer is representing is able to accept jobs using other job submission protocols 4640
- in addition to IPP, it is RECOMMENDED that such an implementation at least allow such "foreign" jobs to 4641
- be queried using Get-Jobs returning "job-id" and "job-uri" as 'unknown'. Such an implementation NEED 4642
- NOT support all of the same IPP job attributes as for IPP jobs. The IPP object returns the 'unknown' out-of-4643
- band value for any requested attribute of a foreign job that is supported for IPP jobs, but not for foreign 4644
- jobs. 4645
- It is further RECOMMENDED, that the IPP Printer generate "job-id" and "job-uri" values for such "foreign 4646
- jobs", if possible, so that they may be targets of other IPP operations, such as Get-Job-Attributes and 4647
- Cancel-Job. Such an implementation also needs to deal with the problem of authentication of such foreign 4648
- jobs. One approach would be to treat all such foreign jobs as belonging to users other than the user of the 4649
- IPP client. Another approach would be for the foreign job to belong to 'anonymous'. Only if the IPP client 4650
- has been authenticated as an operator or administrator of the IPP Printer object, could the foreign jobs be 4651
- queried by an IPP request. Alternatively, if the security policy is to allow users to query other users' jobs, 4652
- then the foreign jobs would also be visible to an end-user IPP client using Get-Jobs and Get-Job-Attributes. 4653
- 9. References 4655
- [ASCII] 4656

- Coded Character Set 7-bit American Standard Code for Information Interchange (ASCII), ANSI 4657 X3.4-1986. This standard is the specification of the US-ASCII charset.
- 4658
- [BCP-11] 4659
- Bradner S., Hovey R., "The Organizations Involved in the IETF Standards Process", 1996/10/29 4660
- (RFC 2028) 4661
- [HTPP] 4662
- J. Barnett, K. Carter, R. DeBry, "Initial Draft Hypertext Printing Protocol HTPP/1.0", October 4663
- 1996, ftp://ftp.pwg.org/pub/pwg/ipp/historic/htpp/overview.ps.gz 4664

```
[IANA-CON]
4665
               Narte, T. and Alvestrand, H.T.: Guidelines for Writing an IANA Considerations Section in RFCs,
4666
               Work in Progress, draft-iesg-iana-considerations-04.txt, May 21, 1998.
4667
       [IANA-CS]
4668
              IANA Registry of Coded Character Sets: ftp://ftp.isi.edu/in-notes/iana/assignments/character-sets
4669
       [IANA-MT]
4670
              IANA Registry of Media Types: ftp://ftp.isi.edu/in-notes/iana/assignments/media-types/
4671
       [IPP-IIG]
4672
              Hastings, T., Manros, C., "Internet Printing Protocol/1.1: draft-ietf-ipp-implementers-guide-v11-
4673
               ??.txt, ?? 1999, work in progress.
4674
       [IPP-IIG1.0]
4675
              Hastings, T., Manros, C., "Internet Printing Protocol/1.0: Implementer's Guide", draft-ietf-ipp-
4676
              implementers-guide-01.txt, February 1999, work in progress.
4677
       [IPP-PRO]
4678
              Herriot, R., Butler, S., Moore, P., Tuner, R., "Internet Printing Protocol/1.1: Encoding and
4679
              Transport", draft-ietf-ipp-protocol-v11-01.txt, May, 1999.
4680
       [ISO10646-1]
4681
              ISO/IEC 10646-1:1993, "Information technology -- Universal Multiple-Octet Coded Character Set
4682
              (UCS) - Part 1: Architecture and Basic Multilingual Plane, JTC1/SC2."
4683
       [ISO8859-1]
4684
              ISO/IEC 8859-1:1987, "Information technology -- 8-bit One-Byte Coded Character Set - Part 1:
4685
              Latin Alphabet Nr 1", 1987, JTC1/SC2.
4686
       [ISO10175]
4687
              ISO/IEC 10175 Document Printing Application (DPA), June 1996.
4688
       [LDPA]
4689
              T. Hastings, S. Isaacson, M. MacKay, C. Manros, D. Taylor, P. Zehler, "LDPA - Lightweight
4690
              Document Printing Application", October 1996,
4691
              ftp://ftp.pwg.org/pub/pwg/ipp/historic/ldpa/ldpa8.pdf.gz
4692
       [P1387.4]
4693
               Kirk, M. (editor), POSIX System Administration - Part 4: Printing Interfaces, POSIX 1387.4 D8,
4694
               1994.
4695
       [PSIS] Herriot, R. (editor), X/Open A Printing System Interoperability Specification (PSIS), August 1995.
4696
       [PWG]
4697
              Printer Working Group, http://www.pwg.org.
4698
```

- 4699 [RFC1035]
- P. Mockapetris, "DOMAIN NAMES IMPLEMENTATION AND SPECIFICATION", RFC 1035,
- 4701 November 1987.
- 4702 [RFC1179]
- McLaughlin, L. III, (editor), "Line Printer Daemon Protocol" RFC 1179, August 1990.
- 4704 [RFC1759]
- Smith, R., Wright, F., Hastings, T., Zilles, S., and Gyllenskog, J., "Printer MIB", RFC 1759, March
- 4706 1995
- 4707 [RFC1766]
- H. Alvestrand, "Tags for the Identification of Languages", RFC 1766, March 1995.
- 4709 [RFC1952]
- P. Deutsch, "GZIP file format specification version 4.3", RFC 1952, May 1996.
- 4711 [RFC2026]
- S. Bradner, "The Internet Standards Process -- Revision 3", RFC 2026, October 1996.
- 4713 [RFC2045]
- N. Fried, N. Borenstein, ", Multipurpose Internet Mail Extensions (MIME) Part One: Format of
- Internet Message Bodies " RFC 2045, November 1996.
- 4716 [RFC2046]
- Multipurpose Internet Mail Extensions (MIME) Part Two: Media Types. N. Freed & N. Borenstein.
- 4718 November 1996. (Obsoletes RFC1521, RFC1522, RFC1590), RFC 2046.
- 4719 [RFC2048]
- N. Freed, J. Klensin & J. Postel, "Multipurpose Internet Mail Extension (MIME) Part Four:
- Registration Procedures". RFC 2048, November 1996.
- 4722 [RFC2068]
- R. Fielding, J. Gettys, J. Mogul, H. Frystyk, T. Berners-Lee, "Hypertext Transfer Protocol -
- 4724 HTTP/1.1", RFC 2068, January 1997
- 4725 [RFC2069]
- J. Franks, P. Hallam-Baker, J. Hostetler, P. Leach, A. Luotonen, E. Sink, L. Stewart, "An Extension
- to HTTP: Digest Access Authentication", RFC-2069, Jan 1997.
- 4728 [RFC2119]
- S. Bradner, "Key words for use in RFCs to Indicate Requirement Levels", RFC 2119, March 1997
- 4730 [RFC2228]
- M. Horowitz, S. Lunt, "FTP Security Extensions", RFC 2228, October 1997.

```
4732 [RFC2246]
4733 T. D
```

T. Dierks, C. Allen, "The TLS Protocol Version 1.0", RFC 2246, January 1999.

4734 [RFC2277]

4735 H. Alvestrand, "IETF Policy on Character Sets and Languages" RFC 2277, January 1998.

4736 [RFC2278]

N. Freed, J. Postel: "IANA CharSet Registration Procedures", RFC 2278, January 1998.

4738 [RFC2279]

F. Yergeau, "UTF-8, a transformation format of ISO 10646", RFC 2279. January 1998.

4740 [RFC2316]

S. Bellovin, "Report of the IAB Security Architecture Workshop", RFC 2316, April 1998.

4742 [RFC2396]

Berners-Lee, T., Fielding, R., Masinter, L., "Uniform Resource Identifiers (URI): Generic Syntax",

4744 RFC 2396, August 1998.

4745 [RFC2565]

Herriot, R., Butler, S., Moore, P., Tuner, R., "Internet Printing Protocol/1.0: Encoding and

4747 Transport", RFC 2565, April 1999.

4748 [RFC2566]

R. deBry, T. Hastings, R. Herriot, S. Isaacson, P. Powell, "Internet Printing Protocol/1.0: Model and

4750 Semantics", RFC 2566, April 1999.

4751 [RFC2567]

Wright, D., "Design Goals for an Internet Printing Protocol", draft-ietf-ipp-req-03.txt, November,

4753 1998.

4754 [RFC2568]

Zilles, S., "Rationale for the Structure and Model and Protocol for the Internet Printing Protocol",

draft-ietf-ipp-rat-04.txt, November, 1998.

4757 [RFC2569]

Herriot, R., Hastings, T., Jacobs, N., Martin, J., "Mapping between LPD and IPP Protocols", draft-

ietf-ipp-lpd-ipp-map-05.txt, November 1998.

4760 [RFC2579]

4761 K. McCloghrie, D. Perkins, J. Schoenwaelder, "Textual Conventions for SMIv2" RFC 2579 (Also

4762 STD0058), April 1999, .

4763 [SSL]

Netscape, The SSL Protocol, Version 3, (Text version 3.02), November 1996.

```
[SWP]
4765
              P. Moore, B. Jahromi, S. Butler, "Simple Web Printing SWP/1.0", May 7, 1997,
4766
              ftp://ftp.pwg.org/pub/pwg/ipp/new_PRO/swp9705.pdf
4767
       10. Author's Address
4768
              Scott A. Isaacson (Editor)
4769
              Novell, Inc.
4770
              122 E 1700 S
4771
              Provo, UT 84606
4772
4773
              Phone: 801-861-7366
4774
              Fax: 801-861-2517
4775
              e-mail: sisaacson@novell.com
4776
4777
              Tom Hastings
4778
              Xerox Corporation
4779
              737 Hawaii St. ESAE 231
4780
              El Segundo, CA 90245
4781
4782
              Phone: 310-333-6413
4783
              Fax: 310-333-5514
4784
              e-mail: hastings@cp10.es.xerox.com
4785
4786
              Robert Herriot
4787
              Xerox Corp.
4788
              3400 Hill View Ave, Building 1
4789
              Palo Alto, CA 94304
4790
4791
              Phone: 650-813-7696
4792
              Fax:
                      650-813-6860
4793
              e-mail: robert.herriot@pahv.xerox.com
4794
4795
              Roger deBry
4796
              Utah Valley State College
4797
              Orem, UT 84058
4798
4799
              Phone: (801) 222-8000
4800
              EMail: debryro@uvsc.edu
4801
4802
              Patrick Powell
4803
              Astart Technologies
4804
              9475 Chesapeake Dr., Suite D
4805
4806
              San Diego, CA 95123
```

```
4807
              Phone: (619) 874-6543
4808
              Fax: (619) 279-8424
4809
              e-mail: papowell@astart.com
4810
4811
              IPP Mailing List: ipp@pwg.org
4812
              IPP Mailing List Subscription: ipp-request@pwg.org
4813
              IPP Web Page: http://www.pwg.org/ipp/
4814
4815
       Implementers of this specification document are encouraged to join IPP Mailing List in order to participate
4816
       in any discussions of clarification issues and review of registration proposals for additional attributes and
4817
       values.
4818
4819
       Other Participants:
4820
              Chuck Adams - Tektronix
4821
              Jeff Barnett - IBM
4822
              Ron Bergman - Dataproducts Corp.
4823
              Sylvan Butler - HP
4824
              Keith Carter - IBM Corporation
4825
              Jeff Copeland - QMS
4826
               Andy Davidson - Tektronix
4827
               Mabry Dozier - QMS
4828
              Lee Farrell - Canon Information Systems
4829
              Steve Gebert - IBM
4830
              Babek Jahromi - Microsoft
4831
              David Kellerman - Northlake Software
4832
              Rick Landau - Digital
4833
              Greg LeClair - Epson
4834
              Harry Lewis - IBM
4835
              Pete Loya - HP
4836
              Ray Lutz - Cognisys
4837
              Mike MacKay - Novell, Inc.
4838
              Daniel Manchala - Xerox
4839
              Carl-Uno Manros - Xerox
4840
              Jay Martin - Underscore
4841
              Larry Masinter - Xerox
4842
              Stan McConnell - Xerox
4843
              Ira McDonald - High North Inc.
4844
              Paul Moore - Microsoft
4845
              Tetsuya Morita - Ricoh
4846
               Yuichi Niwa - Ricoh
4847
              Pat Nogay - IBM
4848
              Ron Norton - Printronics
4849
              Bob Pentecost - HP
4850
```

Rob Rhoads - Intel

4852	Xavier Riley - Xerox
4853	David Roach - Unisys
4854	Stuart Rowley - Kyocera
4855	Hiroyuki Sato - Canon
4856	Bob Setterbo - Adobe
4857	Devon Taylor - Novell, Inc.
4858	Mike Timperman - Lexmark
4859	Randy Turner - Sharp
4860	Atsushi Yuki - Kyocera
4861	Rick Yardumian - Xerox
4862	Lloyd Young - Lexmark
4863	Bill Wagner - DPI
4864	Jim Walker - DAZEL
4865	Chris Wellens - Interworking Labs
4866	Rob Whittle - Novell, Inc.
4867	Don Wright - Lexmark
4868	Peter Zehler - Xerox
4869	Steve Zilles - Adobe

## 4870 11. Formats for IPP Registration Proposals

- In order to propose an IPP extension for registration, the proposer must submit an application to IANA by
- email to "iana@iana.org" or by filling out the appropriate form on the IANA web pages
- (http://www.iana.org). This section specifies the required information and the formats for proposing
- registrations of extensions to IPP as provided in Section 6 for:
- 4875
- 1. type2 'keyword' attribute values
- 2. type3 'keyword' attribute values
- 3. type2 'enum' attribute values
- 4. type3 'enum' attribute values
- 4880 5. attributes
- 4881 6. attribute syntaxes
- 4882 7. operations
- 4883 8. status codes
- 4884 11.1 Type2 keyword attribute values registration
- Type of registration: type2 keyword attribute value
- Name of attribute to which this keyword specification is to be added:
- Proposed keyword name of this keyword value:
- Specification of this keyword value (follow the style of IPP Model Section 4.1.2.3):
- Name of proposer:
- 4890 Address of proposer:
- 4891 Email address of proposer:
- 4892
- Note: For type2 keywords, the Designated Expert will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.
- 4895 11.2 Type3 keyword attribute values registration
- Type of registration: type3 keyword attribute value
- Name of attribute to which this keyword specification is to be added:
- 4898 Proposed keyword name of this keyword value:
- Specification of this keyword value (follow the style of IPP Model Section 4.1.2.3):
- 4900 Name of proposer:
- 4901 Address of proposer:
- 4902 Email address of proposer:

4903

- Note: For type3 keywords, the proposer will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.
- 4906 11.3 Type2 enum attribute values registration
- Type of registration: type2 enum attribute value
- Name of attribute to which this enum specification is to be added:

deBry, Hastings, Herriot, Isaacson, Powell

- 4909 Keyword symbolic name of this enum value:
- Numeric value (to be assigned by the IPP Designated Expert in consultation with IANA):
- Specification of this enum value (follow the style of IPP Model Section 4.1.4):
- Name of proposer:
- 4913 Address of proposer:
- 4914 Email address of proposer:

- Note: For type2 enums, the Designated Expert will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.
- 4918 11.4 Type3 enum attribute values registration
- Type of registration: type3 enum attribute value
- Name of attribute to which this enum specification is to be added:
- 4921 Keyword symbolic name of this enum value:
- Numeric value (to be assigned by the IPP Designated Expert in consultation with IANA):
- Specification of this enum value (follow the style of IPP Model Section 4.1.4):
- Name of proposer:
- 4925 Address of proposer:
- 4926 Email address of proposer:

4927

- Note: For type3 enums, the proposer will be the point of contact for the approved registration specification,
- if any maintenance of the registration specification is needed.
- 4930 11.5 Attribute registration
- 4931 Type of registration: attribute
- 4932 Proposed keyword name of this attribute:
- Types of attribute (Operation, Job Template, Job Description, Printer Description):
- Operations to be used with if the attribute is an operation attribute:
- Object (Job, Printer, etc. if bound to an object):
- 4936 Attribute syntax(es) (include 1setOf and range as in Section 4.2):
- 4937 If attribute syntax is 'keyword' or 'enum', is it type2 or type3:
- 4938 If this is a Printer attribute, MAY the value returned depend on "document-format" (See Section 6.2):
- If this is a Job Template attribute, how does its specification depend on the value of the "multiple-
- 4940 document-handling" attribute:
- Specification of this attribute (follow the style of IPP Model Section 4.2):
- Name of proposer:
- 4943 Address of proposer:
- Email address of proposer:

- Note: For attributes, the IPP Designated Expert will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.

- 4948 11.6 Attribute Syntax registration
- 4949 Type of registration: attribute syntax
- Proposed name of this attribute syntax:
- Type of attribute syntax (integer, octetString, character-string, see [IPP-PRO]):
- Numeric value (to be assigned by the IPP Designated Expert in consultation with IANA):
- Specification of this attribute (follow the style of IPP Model Section 4.1):
- 4954 Name of proposer:
- 4955 Address of proposer:
- 4956 Email address of proposer:

- Note: For attribute syntaxes, the IPP Designated Expert will be the point of contact for the approved
- registration specification, if any maintenance of the registration specification is needed.
- 4960 11.7 Operation registration
- 4961 Type of registration: operation
- 4962 Proposed name of this operation:
- Numeric operation-id value (to be assigned by the IPP Designated Expert in consultation with IANA):
- Object Target (Job, Printer, etc. that operation is upon):
- Specification of this attribute (follow the style of IPP Model Section 3):
- 4966 Name of proposer:
- 4967 Address of proposer:
- 4968 Email address of proposer:

4969

- Note: For operations, the IPP Designated Expert will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.
- 4972 11.8 Attribute Group registration
- 4973 Type of registration: attribute group
- 4974 Proposed name of this attribute group:
- Numeric tag according to [IPP-PRO] (to be assigned by the IPP Designated Expert in consultation with
- 4976 IANA):
- Operation requests and group number for each operation in which the attribute group occurs:
- Operation responses and group number for each operation in which the attribute group occurs:
- Specification of this attribute group (follow the style of IPP Model Section 3):
- 4980 Name of proposer:
- 4981 Address of proposer:
- 4982 Email address of proposer:

- Note: For attribute groups, the IPP Designated Expert will be the point of contact for the approved
- registration specification, if any maintenance of the registration specification is needed.

- 4986 11.9 Status code registration
- 4987 Type of registration: status code
- 4988 Keyword symbolic name of this status code value:
- Numeric value (to be assigned by the IPP Designated Expert in consultation with IANA):
- 4990 Operations that this status code may be used with:
- Specification of this status code (follow the style of IPP Model Section 13 APPENDIX B: Status Codes
- and Suggested Status Code Messages):
- 4993 Name of proposer:
- 4994 Address of proposer:
- 4995 Email address of proposer:

- Note: For status codes, the Designated Expert will be the point of contact for the approved registration
- specification, if any maintenance of the registration specification is needed.
- 4999 12. APPENDIX A: Terminology
- This specification document uses the terminology defined in this section.
- 5001 12.1 Conformance Terminology
- The key words "MUST", "MUST NOT", "REQUIRED", "SHOULD", "SHOULD NOT",
- "RECOMMENDED", "MAY", and "OPTIONAL" in this document are to be interpreted as described in
- 5004 RFC 2119 [RFC2119].
- 5005 12.1.1 NEED NOT
- 5006 This term is not included in RFC 2119. The verb "NEED NOT" indicates an action that the subject of the
- sentence does not have to implement in order to claim conformance to the standard. The verb "NEED
- NOT" is used instead of "MAY NOT" since "MAY NOT" sounds like a prohibition.
- 5009 12.2 Model Terminology
- 5010 12.2.1 Keyword
- Keywords are used within this document as identifiers of semantic entities within the abstract model (see
- section 4.1.2.3). Attribute names, some attribute values, attribute syntaxes, and attribute group names are
- represented as keywords.

### 5014 12.2.2 Attributes

- An attribute is an item of information that is associated with an instance of an IPP object. An attribute
- consists of an attribute name and one or more attribute values. Each attribute has a specific attribute syntax.
- All object attributes are defined in section 4 and all operation attributes are defined in section 3.
- Job Template Attributes are described in section 4.2. The client optionally supplies Job Template attributes
- in a create request (operation requests that create Job objects). The Printer object has associated attributes
- which define supported and default values for the Printer.
- 5021 12.2.2.1 Attribute Name
- Each attribute is uniquely identified in this document by its attribute name. An attribute name is a keyword.
- The keyword attribute name is given in the section header describing that attribute. In running text in this
- document, attribute names are indicated inside double quotation marks (") where the quotation marks are
- not part of the keyword itself.
- 5026 12.2.2.2 Attribute Group Name
- Related attributes are grouped into named groups. The name of the group is a keyword. The group name
- may be used in place of naming all the attributes in the group explicitly. Attribute groups are defined in
- section 3.
- 5030 12.2.2.3 Attribute Value
- Each attribute has one or more values. Attribute values are represented in the syntax type specified for that
- attribute. In running text in this document, attribute values are indicated inside single quotation marks ('),
- whether their attribute syntax is keyword, integer, text, etc. where the quotation marks are not part of the
- value itself.
- 5035 12.2.2.4 Attribute Syntax
- Each attribute is defined using an explicit syntax type. In this document, each syntax type is defined as a
- keyword with specific meaning. The "Encoding and Transport" document [IPP-PRO] indicates the actual
- "on-the-wire" encoding rules for each syntax type. Attribute syntax types are defined in section 4.1.
- 5039 12.2.3 Supports
- By definition, a Printer object supports an attribute only if that Printer object responds with the
- corresponding attribute populated with some value(s) in a response to a query for that attribute. A Printer
- object supports an attribute value if the value is one of the Printer object's "supported values" attributes.
- The device behind a Printer object may exhibit a behavior that corresponds to some IPP attribute, but if the
- Printer object, when queried for that attribute, doesn't respond with the attribute, then as far as IPP is
- concerned, that implementation does not support that feature. If the Printer object's "xxx-supported"

attribute is not populated with a particular value (even if that value is a legal value for that attribute), then that Printer object does not support that particular value.

A conforming implementation MUST support all REQUIRED attributes. However, even for REQUIRED attributes, conformance to IPP does not mandate that all implementations support all possible values representing all possible job processing behaviors and features. For example, if a given instance of a Printer supports only certain document formats, then that Printer responds with the "document-format-supported" attribute populated with a set of values, possibly only one, taken from the entire set of possible values defined for that attribute. This limited set of values represents the Printer's set of supported document formats. Supporting an attribute and some set of values for that attribute enables IPP end users to be aware of and make use of those features associated with that attribute and those values. If an implementation chooses to not support an attribute or some specific value, then IPP end users would have no ability to make use of that feature within the context of IPP itself. However, due to existing practice and legacy systems which are not IPP aware, there might be some other mechanism outside the scope of IPP to control or request the "unsupported" feature (such as embedded instructions within the document data itself).

For example, consider the "finishings-supported" attribute.

- 1) If a Printer object is not physically capable of stapling, the "finishings-supported" attribute MUST NOT be populated with the value of 'staple'.
- 2) A Printer object is physically capable of stapling, however an implementation chooses not to support stapling in the IPP "finishings" attribute. In this case, 'staple' MUST NOT be a value in the "finishings-supported" Printer object attribute. Without support for the value 'staple', an IPP end user would have no means within the protocol itself to request that a Job be stapled. However, an existing document data formatter might be able to request that the document be stapled directly with an embedded instruction within the document data. In this case, the IPP implementation does not "support" stapling, however the end user is still able to have some control over the stapling of the completed job.
- 3) A Printer object is physically capable of stapling, and an implementation chooses to support stapling in the IPP "finishings" attribute. In this case, 'staple' MUST be a value in the "finishings-supported" Printer object attribute. Doing so, would enable end users to be aware of and make use of the stapling feature using IPP attributes.

Even though support for Job Template attributes by a Printer object is OPTIONAL, it is RECOMMENDED that if the device behind a Printer object is capable of realizing any feature or function that corresponds to an IPP attribute and some associated value, then that implementation SHOULD support that IPP attribute and value.

The set of values in any of the supported value attributes is set (populated) by some administrative process or automatic sensing mechanism that is outside the scope of this IPP/1.1 document. For administrative policy and control reasons, an administrator may choose to make only a subset of possible values visible to the end user. In this case, the real output device behind the IPP Printer abstraction may be capable of a certain feature, however an administrator is specifying that access to that feature not be exposed to the end user through the IPP protocol. Also, since a Printer object may represent a logical print device (not just a physical device) the actual process for supporting a value is undefined and left up to the implementation.

- However, if a Printer object supports a value, some manual human action may be needed to realize the 5088 semantic action associated with the value, but no end user action is required. 5089
- For example, if one of the values in the "finishings-supported" attribute is 'staple', the actual process might 5090 be an automatic staple action by a physical device controlled by some command sent to the device. Or, the 5091 actual process of stapling might be a manual action by an operator at an operator attended Printer object. 5092
- For another example of how supported attributes function, consider a system administrator who desires to 5093 control all print jobs so that no job sheets are printed in order to conserve paper. To force no job sheets, the 5094 system administrator sets the only supported value for the "job-sheets-supported" attribute to 'none'. In this 5095 case, if a client requests anything except 'none', the create request is rejected or the "job-sheets" value is 5096 ignored (depending on the value of "ipp-attribute-fidelity"). To force the use of job start/end sheets on all 5097 jobs, the administrator does not include the value 'none' in the "job-sheets-supported" attribute. In this case, 5098 if a client requests 'none', the create request is rejected or the "job-sheets" value is ignored (again depending 5099 on the value of "ipp-attribute-fidelity"). 5100
- 12.2.4 print-stream page 5101
- A "print-stream page" is a page according to the definition of pages in the language used to express the 5102 document data. 5103
- 12.2.5 impression 5104
- An "impression" is the image (possibly many print-stream pages in different configurations) imposed onto a 5105 single media page. 5106
- 13. APPENDIX B: Status Codes and Suggested Status Code Messages 5107
- This section defines status code enum keywords and values that are used to provide semantic information 5108 on the results of an operation request. Each operation response MUST include a status code. The response 5109 MAY also contain a status message that provides a short textual description of the status. The status code 5110 is intended for use by automata, and the status message is intended for the human end user. Since the status 5111 message is an OPTIONAL component of the operation response, an IPP application (i.e., a browser, GUI, 5112 print driver or gateway) is NOT REQUIRED to examine or display the status message, since it MAY not be 5113 returned to the application. 5114
- The prefix of the status keyword defines the class of response as follows: 5115
- "informational" Request received, continuing process 5116 5117
  - "successful" The action was successfully received, understood, and accepted
- "redirection" Further action must be taken in order to complete the request 5118
- "client-error" The request contains bad syntax or cannot be fulfilled 5119
- "server-error" The IPP object failed to fulfill an apparently valid request 5120

- As with type2 enums, IPP status codes are extensible. IPP clients are NOT REQUIRED to understand the
- meaning of all registered status codes, though such understanding is obviously desirable. However, IPP
- clients MUST understand the class of any status code, as indicated by the prefix, and treat any unrecognized
- response as being equivalent to the first status code of that class, with the exception that an unrecognized
- response MUST NOT be cached. For example, if an unrecognized status code of "client-error-xxx-yyy" is
- received by the client, it can safely assume that there was something wrong with its request and treat the
- response as if it had received a "client-error-bad-request" status code. In such cases, IPP applications
- 5129 SHOULD present the OPTIONAL message (if present) to the end user since the message is likely to
- contain human readable information which will help to explain the unusual status. The name of the enum
- is the suggested status message for US English.
- The status code values range from 0x0000 to 0x7FFF. The value ranges for each status code class are as
- 5133 follows:
- "successful" 0x0000 to 0x00FF
- "informational" 0x0100 to 0x01FF
- "redirection" 0x0200 to 0x02FF
- "client-error" 0x0400 to 0x04FF
- "server-error" 0x0500 to 0x05FF
- The top half (128 values) of each range (0x0n40 to 0x0nFF, for n = 0 to 5) is reserved for private use within
- each status code class. Values 0x0600 to 0x7FFF are reserved for future assignment and MUST NOT be
- 5142 used.

- 5143 13.1 Status Codes
- Each status code is described below. Section 13.1.5.9 contains a table that indicates which status codes
- apply to which operations. The Implementer's Guide [IPP-IIG] describe the suggested steps for processing
- 5146 IPP attributes for all operations, including returning status codes.
- 5147 13.1.1 Informational
- This class of status code indicates a provisional response and is to be used for informational purposes only.
- There are no status codes defined in IPP/1.1 for this class of status code.
- 5150 13.1.2 Successful Status Codes
- This class of status code indicates that the client's request was successfully received, understood, and
- 5152 accepted.
- 5153 13.1.2.1 successful-ok (0x0000)
- The request has succeeded and no request attributes were substituted or ignored. In the case of a response
- to a create request, the 'successful-ok' status code indicates that the request was successfully received and

- validated, and that the Job object has been created; it does not indicate that the job has been processed. The
- transition of the Job object into the 'completed' state is the only indicator that the job has been printed.
- 5158 13.1.2.2 successful-ok-ignored-or-substituted-attributes (0x0001)
- The request has succeeded, but some supplied (1) attributes were ignored or (2) unsupported values were
- substituted with supported values or were ignored in order to perform the operation without rejecting it.
- Unsupported attributes, attribute syntaxes, or values MUST be returned in the Unsupported Attributes
- group of the response for all operations. There is an exception to this rule for the query operations: Get-
- Printer-Attributes, Get-Jobs, and Get-Job-Attributes for the "requested-attributes" operation attribute only.
- When the supplied values of the "requested-attributes" operation attribute are requesting attributes that are
- not supported, the IPP object MAY, but is NOT REQUIRED to, return the "requested-attributes" attribute
- in the Unsupported Attribute response group (with the unsupported values only). See sections 3.1.7 and
- 5167 3.2.1.2.
- 5168 13.1.2.3 successful-ok-conflicting-attributes (0x0002)
- The request has succeeded, but some supplied attribute values conflicted with the values of other supplied
- attributes. These conflicting values were either (1) substituted with (supported) values or (2) the attributes
- were removed in order to process the job without rejecting it. Attributes or values which conflict with other
- attributes and have been substituted or ignored MUST be returned in the Unsupported Attributes group of
- the response for all operations as supplied by the client. See sections 3.1.7 and 3.2.1.2.
- 5174 13.1.3 Redirection Status Codes
- 5175 This class of status code indicates that further action needs to be taken to fulfill the request.
- 5176 There are no status codes defined in IPP/1.1 for this class of status code.
- 5177 13.1.4 Client Error Status Codes
- This class of status code is intended for cases in which the client seems to have erred. The IPP object
- 5179 SHOULD return a message containing an explanation of the error situation and whether it is a temporary or
- 5180 permanent condition.
- 5181 13.1.4.1 client-error-bad-request (0x0400)
- The request could not be understood by the IPP object due to malformed syntax (such as the value of a
- 5183 fixed length attribute whose length does not match the prescribed length for that attribute see the
- Implementer's Guide [IPP-IIG] ). The IPP application SHOULD NOT repeat the request without
- 5185 modifications.

- 5186 13.1.4.2 client-error-forbidden (0x0401)
- The IPP object understood the request, but is refusing to fulfill it. Additional authentication information or
- authorization credentials will not help and the request SHOULD NOT be repeated. This status code is
- commonly used when the IPP object does not wish to reveal exactly why the request has been refused or
- when no other response is applicable.
- 5191 13.1.4.3 client-error-not-authenticated (0x0402)
- The request requires user authentication. The IPP client may repeat the request with suitable authentication
- information. If the request already included authentication information, then this status code indicates that
- authorization has been refused for those credentials. If this response contains the same challenge as the
- prior response, and the user agent has already attempted authentication at least once, then the response
- message may contain relevant diagnostic information. This status codes reveals more information than
- "client-error-forbidden".
- 5198 13.1.4.4 client-error-not-authorized (0x0403)
- The requester is not authorized to perform the request. Additional authentication information or
- authorization credentials will not help and the request SHOULD NOT be repeated. This status code is used
- when the IPP object wishes to reveal that the authentication information is understandable, however, the
- requester is explicitly not authorized to perform the request. This status codes reveals more information
- than "client-error-forbidden" and "client-error-not-authenticated".
- 5204 13.1.4.5 client-error-not-possible (0x0404)
- This status code is used when the request is for something that can not happen. For example, there might
- be a request to cancel a job that has already been canceled or aborted by the system. The IPP client
- 5207 SHOULD NOT repeat the request.
- 5208 13.1.4.6 client-error-timeout (0x0405)
- The client did not produce a request within the time that the IPP object was prepared to wait. For example,
- a client issued a Create-Job operation and then, after a long period of time, issued a Send-Document
- operation and this error status code was returned in response to the Send-Document request (see section
- 3.3.1). The IPP object might have been forced to clean up resources that had been held for the waiting
- additional Documents. The IPP object was forced to close the Job since the client took too long. The client
- 5214 SHOULD NOT repeat the request without modifications.
- 5215 13.1.4.7 client-error-not-found (0x0406)
- The IPP object has not found anything matching the request URI. No indication is given of whether the
- condition is temporary or permanent. For example, a client with an old reference to a Job (a URI) tries to
- cancel the Job, however in the mean time the Job might have been completed and all record of it at the
- Printer has been deleted. This status code, 'client-error-not-found' is returned indicating that the referenced

- Job can not be found. This error status code is also used when a client supplies a URI as a reference to the
- document data in either a Print-URI or Send-URI operation, but the document can not be found.
- In practice, an IPP application should avoid a not found situation by first querying and presenting a list of
- valid Printer URIs and Job URIs to the end-user.
- 5224 13.1.4.8 client-error-gone (0x0407)
- 5225 The requested object is no longer available and no forwarding address is known. This condition should be
- considered permanent. Clients with link editing capabilities should delete references to the request URI
- after user approval. If the IPP object does not know or has no facility to determine, whether or not the
- condition is permanent, the status code "client-error-not-found" should be used instead.
- This response is primarily intended to assist the task of maintenance by notifying the recipient that the
- resource is intentionally unavailable and that the IPP object administrator desires that remote links to that
- resource be removed. It is not necessary to mark all permanently unavailable resources as "gone" or to keep
- the mark for any length of time -- that is left to the discretion of the IPP object administrator.
- 5233 13.1.4.9 client-error-request-entity-too-large (0x0408)
- The IPP object is refusing to process a request because the request entity is larger than the IPP object is
- willing or able to process. An IPP Printer returns this status code when it limits the size of print jobs and it
- receives a print job that exceeds that limit or when the attributes are so many that their encoding causes the
- request entity to exceed IPP object capacity.
- 5238 13.1.4.10 client-error-request-value-too-long (0x0409)
- The IPP object is refusing to service the request because one or more of the client-supplied attributes has a
- variable length value that is longer than the maximum length specified for that attribute. The IPP object
- might not have sufficient resources (memory, buffers, etc.) to process (even temporarily), interpret, and/or
- ignore a value larger than the maximum length. Another use of this error code is when the IPP object
- supports the processing of a large value that is less than the maximum length, but during the processing of
- the request as a whole, the object may pass the value onto some other system component which is not able
- to accept the large value. For more details, see the Implementer's Guide [IPP-IIG].
- Note: For attribute values that are URIs, this rare condition is only likely to occur when a client has
- improperly submitted a request with long query information (e.g. an IPP application allows an end-user to
- enter an invalid URI), when the client has descended into a URI "black hole" of redirection (e.g., a
- redirected URI prefix that points to a suffix of itself), or when the IPP object is under attack by a client
- attempting to exploit security holes present in some IPP objects using fixed-length buffers for reading or
- manipulating the Request-URI.

- 5252 13.1.4.11 client-error-document-format-not-supported (0x040A)
- The IPP object is refusing to service the request because the document data is in a format, as specified in
- the "document-format" operation attribute, that is not supported by the Printer object. This error is returned
- independent of the client-supplied "ipp-attribute-fidelity". The Printer object MUST return this status code,
- even if there are other Job Template attributes that are not supported as well, since this error is a bigger
- problem than with Job Template attributes. See sections 3.1.7 and 3.2.1.1. Issue 11
- 5258 13.1.4.12 client-error-attributes-or-values-not-supported (0x040B)
- In a create request, if the Printer object does not support one or more attributes, attribute syntaxes, or
- attribute values supplied in the request and the client supplied the "ipp-attributes-fidelity" operation
- attribute with the 'true' value, the Printer object MUST return this status code. The Printer object MUST
- also return in the Unsupported Attributes Group all the attributes and/or values supplied by the client that
- are not supported. See section 3.1.7. Issue 11 For example, if the request indicates 'iso-a4' media, but that
- media type is not supported by the Printer object. Or, if the client supplies a Job Template attribute and the
- attribute itself is not even supported by the Printer. If the "ipp-attribute-fidelity" attribute is 'false', the
  Printer MUST ignore or substitute values for unsupported Job Template attributes and values rather than
- Printer MUST ignore or substitute values for unsupported Job Template attributes and values rather
- reject the request and return this status code.
- For any operation where a client requests attributes (such as a Get-Jobs, Get-Printer-Attributes, or Get-Job-
- Attributes operation), if the IPP object does not support one or more of the requested attributes, the IPP
- object simply ignores the unsupported requested attributes and processes the request as if they had not been
- supplied, rather than returning this status code. In this case, the IPP object MUST return the 'successful-ok-
- ignored-or-substituted-attributes' status code and MAY return the unsupported attributes as values of the
- "requested-attributes" in the Unsupported Attributes Group (see section 13.1.2.2).
- 13.1.4.13 client-error-uri-scheme-not-supported (0x040C)
- The scheme of the client-supplied URI in a Print-URI or a Send-URI operation is not supported. See
- section 3.1.7. Issue 11
- 5277 13.1.4.14 client-error-charset-not-supported (0x040D)
- For any operation, if the IPP Printer does not support the charset supplied by the client in the "attributes-
- charset" operation attribute, the Printer MUST reject the operation and return this status and any 'text' or
- 'name' attributes using the 'utf-8' charset (see Section 3.1.4.1). See section 3.1.7. Issue 11
- 5281 13.1.4.15 client-error-conflicting-attributes (0x040E)
- The request is rejected because some attribute values conflicted with the values of other attributes which
- this document does not permit to be substituted or ignored. The Printer object MUST also return in the
- Unsupported Attributes Group the conflicting attributes supplied by the client. See sections 3.1.7 and
- 5285 3.2.1.2. Issue 27

- 5286 13.1.4.16 client-error-compression-not-supported (0x040F) Issue 6
- 5287 The IPP object is refusing to service the request because the document data, as specified in the
- "compression" operation attribute, is compressed in a way that is not supported by the Printer object. This
- error is returned independent of the client-supplied "ipp-attribute-fidelity". The Printer object MUST return
- this status code, even if there are other Job Template attributes that are not supported as well, since this
- error is a bigger problem than with Job Template attributes. Issue 6 See sections 3.1.7 and 3.2.1.1. Issue 11
- 5292 13.1.4.17 client-error-compression-error (0x0410) Issue 6
- The IPP object is refusing to service the request because the document data cannot be decompressed when
- using the algorithm specified by the "compression" operation attribute. This error is returned independent
- of the client-supplied "ipp-attribute-fidelity". The Printer object MUST return this status code, even if there
- are Job Template attributes that are not supported as well, since this error is a bigger problem than with Job
- Template attributes. See sections 3.1.7 and 3.2.1.1.
- 5298 13.1.4.18 client-error-document-format-error (0x0411) Issue 28
- The IPP object is refusing to service the request because Printer encountered an error in the document data
- while interpreting it. This error is returned independent of the client-supplied "ipp-attribute-fidelity". The
- Printer object MUST return this status code, even if there are Job Template attributes that are not supported
- as well, since this error is a bigger problem than with Job Template attributes. See sections 3.1.7 and
- 5303 3.2.1.1.
- 13.1.4.19 client-error-document-access-error (0x0412) Issue 35
- The IPP object is refusing to service the Print-URI or Send-URI request because Printer encountered an
- access error while attempting to validate the accessibility or access the document data specified in the
- "document-uri" operation attribute. The Printer MAY also return a specific document access error code
- using the "document-access-error" operation attribute (see section 3.1.6.4). This error is returned
- independent of the client-supplied "ipp-attribute-fidelity". The Printer object MUST return this status code,
- even if there are Job Template attributes that are not supported as well, since this error is a bigger problem
- than with Job Template attributes. See section 3.1.7.
- 5312 13.1.5 Server Error Status Codes
- This class of status codes indicates cases in which the IPP object is aware that it has erred or is incapable of
- performing the request. The IPP object SHOULD include a message containing an explanation of the error
- situation, and whether it is a temporary or permanent condition.
- 5316 13.1.5.1 server-error-internal-error (0x0500)
- The IPP object encountered an unexpected condition that prevented it from fulfilling the request. This error
- status code differs from "server-error-temporary-error" in that it implies a more permanent type of internal
- error. It also differs from "server-error-device-error" in that it implies an unexpected condition (unlike a

- paper-jam or out-of-toner problem which is undesirable but expected). This error status code indicates that probably some knowledgeable human intervention is required.
- 5322 13.1.5.2 server-error-operation-not-supported (0x0501)
- The IPP object does not support the functionality required to fulfill the request. This is the appropriate
- response when the IPP object does not recognize an operation or is not capable of supporting it. See section
- 5325 3.1.7. Issue 18
- 5326 13.1.5.3 server-error-service-unavailable (0x0502)
- The IPP object is currently unable to handle the request due to a temporary overloading or maintenance of
- the IPP object. The implication is that this is a temporary condition which will be alleviated after some
- delay. If known, the length of the delay may be indicated in the message. If no delay is given, the IPP
- application should handle the response as it would for a "server-error-temporary-error" response. If the
- condition is more permanent, the error status codes "client-error-gone" or "client-error-not-found" could be
- 5332 used.
- 5333 13.1.5.4 server-error-version-not-supported (0x0503)
- The IPP object does not support, or refuses to support, the IPP protocol version that was supplied as the
- value of the "version-number" operation parameter in the request. The IPP object is indicating that it is
- unable or unwilling to complete the request using the same major and minor version number as supplied in
- the request other than with this error message. The error response SHOULD contain a "status-message"
- attribute (see section 3.1.6.2) describing why that version is not supported and what other versions are
- supported by that IPP object. See section 3.1.8. Issue 11
- The error response MUST identify in the "version-number" operation parameter the closest version number
- that the IPP object does support. For example, if a client supplies version '1.0' and an IPP/1.1 object
- supports version '1.0', then it MUST respond with version '1.0' in all responses to such a request. If the
- 5343 IPP/1.1 object does not support version '1.0', then it SHOULD accept the request and respond with version
- 3344 '1.1' or MAY reject the request and respond with this error code and version '1.1'. If a client supplies a
- version '1.2' the IPP/1.1 object SHOULD accept the request and return version '1.1' or MAY reject the
- request and respond with this error code and version '1.1'. See sections 3.1.8 and 4.4.14. Issue 36
- 13.1.5.5 server-error-device-error (0x0504)
- A printer error, such as a paper jam, occurs while the IPP object processes a Print or Send operation. The
- response contains the true Job Status (the values of the "job-state" and "job-state-reasons" attributes).
- Additional information can be returned in the OPTIONAL "job-state-message" attribute value or in the
- OPTIONAL status message that describes the error in more detail. This error status code is only returned in
- situations where the Printer is unable to accept the create request because of such a device error. For
- example, if the Printer is unable to spool, and can only accept one job at a time, the reason it might reject a
- create request is that the printer currently has a paper jam. In many cases however, where the Printer object
- can accept the request even though the Printer has some error condition, the 'successful-ok' status code will

- be returned. In such a case, the client would look at the returned Job Object Attributes or later query the
- Printer to determine its state and state reasons.
- 5358 13.1.5.6 server-error-temporary-error (0x0505)
- A temporary error such as a buffer full write error, a memory overflow (i.e. the document data exceeds the
- memory of the Printer), or a disk full condition, occurs while the IPP Printer processes an operation. The
- client MAY try the unmodified request again at some later point in time with an expectation that the
- temporary internal error condition may have been cleared. Alternatively, as an implementation option, a
- Printer object MAY delay the response until the temporary condition is cleared so that no error is returned.
- 13.1.5.7 server-error-not-accepting-jobs (0x0506)
- A temporary error indicating that the Printer is not currently accepting jobs, because the administrator has
- set the value of the Printer's "printer-is-not-accepting-jobs" attribute to 'false' (by means outside the scope of
- this IPP/1.1 document).
- 5368 13.1.5.8 server-error-busy (0x0507)
- A temporary error indicating that the Printer is too busy processing jobs and/or other requests. The client
- 5370 SHOULD try the unmodified request again at some later point in time with an expectation that the
- temporary busy condition will have been cleared.
- 13.1.5.9 server-error-job-canceled (0x0508)
- An error indicating that the job has been canceled by an operator or the system while the client was
- transmitting the data to the IPP Printer. If a job-id and job-uri had been created, then they are returned in
- the Print-Job, Send-Document, or Send-URI response as usual; otherwise, no job-id and job-uri are returned
- in the response.
- 13.1.5.10 server-error-multiple-document-jobs-not-supported (0x0509) Issue 34
- The IPP object does not support multiple documents per job and a client attempted to supply document data
- with a second Send-Document or Send-URI operation.

# 13.2 Status Codes for IPP Operations

```
PJ = Print-Job, PU = Print-URI, CJ = Create-Job, SD = Send-Document
5381
     SU = Send-URI, V = Validate-Job, GA = Get-Job-Attributes and
5382
     Get-Printer-Attributes, GJ = Get-Jobs, C = Cancel-Job
5383
5384
                                                          IPP Operations
5385
5386
     IPP Status Keyword
                                                   PJ PU CJ SD SU V GA GJ C
5387
     successful-ok
5388
                                                   Х
                                                       Х
                                                          Х
                                                             X
                                                                 Х
                                                                    X X
                                                                          X
                                                                             Х
     successful-ok-ignored-or-substituted-
5389
                                                   x
                                                       x
                                                          Х
                                                             X
                                                                    хх
                                                                 X
                                                                          X
                                                                             X
           attributes
5390
     successful-ok-conflicting-attributes
5391
                                                   X
                                                       X
                                                          X
                                                             X
                                                                 X
                                                                    X X
                                                                          X
                                                                             X
5392
     client-error-bad-request
                                                   х
                                                       х
                                                          х
                                                             х
                                                                 X
                                                                    хх
                                                                          х
                                                                             х
     client-error-forbidden
5393
                                                   Х
                                                             Х
                                                       X
                                                          X
                                                                 Х
                                                                    хх
                                                                             X
     client-error-not-authenticated
5394
                                                   Х
                                                       X
                                                          X
                                                             X
                                                                 X
                                                                    X X
                                                                          X
                                                                             X
5395
     client-error-not-authorized
                                                   Х
                                                       Х
                                                          X
                                                             X
                                                                 Х
                                                                    хх
                                                                             Х
     client-error-not-possible
5396
                                                   X
                                                       X
                                                          Х
                                                             X
                                                                 X
                                                                    X X
                                                                          X
                                                                             X
     client-error-timeout
5397
                                                             X
                                                                 X
     client-error-not-found
5398
                                                             х
                                                                 х
                                                   Х
                                                       X
                                                          Х
                                                                    хх
                                                                          X
                                                                             X
     client-error-gone
                                                          X
                                                   х
                                                             х
                                                                    хх
                                                                             х
5399
                                                      X
                                                                 X
                                                                          X
     client-error-request-entity-too-large
5400
                                                   X
                                                      X
                                                          X
                                                             х
                                                                 X
                                                                    x x
                                                                             X
     client-error-request-value-too-long
5401
                                                   х
                                                      \mathbf{x}
                                                          X
                                                             х
                                                                    хх
                                                                 X
                                                                             X
     client-error-document-format-not-
5402
                                                   X
                                                       X
                                                             X
                                                                 X
                                                                    X X
           supported
5403
     client-error-attributes-or-values-not-
5404
                                                   X
                                                       X
                                                          X
                                                             Х
                                                                 X
                                                                    X X
                                                                          X
                                                                             X
           supported
5405
     client-error-uri-scheme-not-supported
                                                       Х
5406
                                                                 X
5407
     client-error-charset-not-supported
                                                   x
                                                       х
                                                          х
                                                             х
                                                                 х
                                                                    хх
                                                                          х
                                                                             x
     client-error-conflicting-attributes
                                                   х
                                                             Х
                                                                    хх
5408
                                                       X
                                                          X
                                                                 X
                                                                             X
     client-error-compression-not-supported
5409
                                                   Х
                                                       х
                                                             X
                                                                 Х
     client-error-compression-error
5410
                                                   Х
                                                       X
                                                             Х
                                                                 X
     client-error-document-format-error
5411
                                                   X
                                                       Х
                                                             X
                                                                 Х
     client-error-document-access-error
5412
                                                       X
                                                                 X
     server-error-internal-error
5413
                                                       Х
                                                             Х
                                                                 X
                                                                    хх
                                                                             Х
                                                   X
                                                          X
                                                                          X
5414
     server-error-operation-not-supported
                                                       Х
                                                          X
                                                             X
                                                                 Х
     server-error-service-unavailable
5415
                                                   X
                                                       X
                                                          Х
                                                             х
                                                                 х
                                                                    x x
                                                                          X
                                                                             х
     server-error-version-not-supported
5416
                                                   х
                                                       X
                                                          x
                                                             Х
                                                                 X
                                                                    x x
     server-error-device-error
5417
                                                   Х
                                                       X
                                                          X
                                                             X
                                                                 Х
     server-error-temporary-error
5418
                                                   X
                                                       X
                                                          X
                                                             X
                                                                 X
     server-error-not-accepting-jobs
5419
                                                   Х
                                                          X
                                                       X
                                                                    Х
     server-error-busy
                                                       Х
                                                          X
                                                             Х
                                                                 Х
                                                                    x x
5420
                                                   X
                                                                          X
                                                                             X
     server-error-job-canceled
5421
                                                   х
                                                             х
                                                                 X
     server-error-multiple-document-jobs-
5422
                                                             X
                                                                 Х
             not-supported
5423
```

```
HJ = Hold-Job, RJ = Release-Job, RS = Restart-Job
5424
     PP = Pause-Printer, RP = Resume-Printer, PJ = Purge-Jobs
5425
5426
                                                   IPP Operations (cont.)
5427
                                                   HJ RJ RS PP RP PJ
5428
     IPP Status Keyword
     _____
5429
     successful-ok
5430
                                                   X
                                                      X
                                                          X
                                                             X
                                                                 X
                                                                    X
     successful-ok-ignored-or-substituted-
5431
                                                   Х
                                                      Х
                                                          Х
                                                             X
                                                                 Х
                                                                    Х
           attributes
5432
     successful-ok-conflicting-attributes
5433
                                                                    X
                                                   Х
                                                      X
                                                          Х
                                                             Х
                                                                X
     client-error-bad-request
5434
                                                   x
                                                      X
                                                          X
                                                             X
                                                                 x
                                                                    Х
     client-error-forbidden
                                                          Х
5435
                                                   X
                                                      \mathbf{x}
                                                             х
                                                                X
                                                                    х
     client-error-not-authenticated
5436
                                                   Х
                                                      Х
                                                          X
                                                             X
                                                                    X
                                                                X
     client-error-not-authorized
5437
                                                   Х
                                                      Х
                                                          X
                                                             X
                                                                \mathbf{x}
                                                                    X
     client-error-not-possible
5438
                                                   Х
                                                      Х
                                                          X
                                                             X
                                                                 Х
     client-error-timeout
5439
     client-error-not-found
5440
                                                   Х
                                                      X
                                                          Х
                                                             Х
                                                                Х
                                                                    Х
     client-error-gone
                                                             х
5441
                                                   X
                                                      X
                                                          X
                                                                X
                                                                    X
     client-error-request-entity-too-large
5442
                                                   X
                                                      X
                                                          X
                                                             X
                                                                X
                                                                    X
     client-error-request-value-too-long
5443
                                                          Х
                                                             X
                                                                 Х
     client-error-document-format-not-
5444
           supported
5445
5446
     client-error-attributes-or-values-not-
                                                   Х
                                                      Х
                                                          Х
                                                             X
                                                                 Х
                                                                    X
5447
           supported
     client-error-uri-scheme-not-supported
5448
     client-error-charset-not-supported
5449
                                                   x
                                                      X
                                                          Х
                                                             X
                                                                X
                                                                    X
5450
     client-error-conflicting-attributes
                                                   x
                                                      x
                                                          X
                                                             х
                                                                х
                                                                    х
     client-error-compression-not-supported
5451
5452
     client-error-compression-error
     client-error-document-format-error
5453
     client-error-document-access-error
5454
     server-error-internal-error
5455
                                                   X
                                                      Х
                                                          X
                                                             X
                                                                X
                                                                    X
     server-error-operation-not-supported
                                                   X
                                                          Х
                                                             Х
                                                                    Х
5456
                                                      X
                                                                X
     server-error-service-unavailable
                                                          Х
5457
                                                   X
                                                      X
                                                             X
                                                                    X
                                                                X
     server-error-version-not-supported
5458
                                                   Х
                                                      X
                                                          Х
                                                             X
                                                                х
                                                                    X
5459
     server-error-device-error
     server-error-temporary-error
5460
                                                   X
                                                      X
                                                          X
                                                             X
                                                                X
                                                                    X
     server-error-not-accepting-jobs
5461
     server-error-busy
5462
                                                   X
                                                      X
                                                          Х
                                                             X
                                                                X
                                                                    X
     server-error-job-canceled
5463
5464
     server-error-multiple-document-jobs-
             not-supported
5465
```

```
5468 14. APPENDIX C: "media" keyword values
```

5469 Standard keyword values are taken from several sources.

5470 Standard values are defined (taken from DPA[ISO10175] and the Printer MIB[RFC1759]):

```
iso-a4-white': Specifies the ISO A4 white medium
iso-a4-colored': Specifies the ISO A4 colored medium
iso-a4-transparent' Specifies the ISO A4 transparent medium
iso-a3-white': Specifies the ISO A3 white medium
```

iso-a3-colored': Specifies the ISO A3 colored medium iso-a5-white': Specifies the ISO A5 white medium iso-a5-colored': Specifies the ISO A5 colored medium iso-b4-white': Specifies the ISO B4 white medium

iso-b4-colored': Specifies the ISO B4 colored medium iso-b5-white': Specifies the ISO B5 white medium iso-b5-colored': Specifies the ISO B5 colored medium jis-b4-white': Specifies the JIS B4 white medium

jis-b4-colored': Specifies the JIS B4 colored medium jis-b5-white': Specifies the JIS B5 white medium

jis-b5-colored': Specifies the JIS B5 colored medium

54865487

5488

The following standard values are defined for North American media:

```
'na-letter-white': Specifies the North American letter white medium
'na-letter-colored': Specifies the North American letter colored medium
'na letter transparent'. Specifies the North American letter transparent medium
```

'na-letter-transparent': Specifies the North American letter transparent medium

ina-legal-white': Specifies the North American legal white medium ina-legal-colored': Specifies the North American legal colored medium

5494

5495

The following standard values are defined for envelopes:

```
iso-b4-envelope': Specifies the ISO B4 envelope medium iso-b5-envelope': Specifies the ISO B5 envelope medium iso-c3-envelope': Specifies the ISO C3 envelope medium iso-c4-envelope': Specifies the ISO C4 envelope medium iso-c5-envelope': Specifies the ISO C5 envelope medium iso-c6-envelope': Specifies the ISO C6 envelope medium iso-c6-envelope': Specifies the ISO C6 envelope medium
```

iso-designated-long-envelope': Specifies the ISO Designated Long envelope medium

ina-10x13-envelope': Specifies the North American 10x13 envelope medium ina-9x12-envelope': Specifies the North American 9x12 envelope medium

```
'monarch-envelope': Specifies the Monarch envelope
5505
           'na-number-10-envelope': Specifies the North American number 10 business envelope medium
5506
           'na-7x9-envelope': Specifies the North American 7x9 inch envelope
5507
           'na-9x11-envelope': Specifies the North American 9x11 inch envelope
5508
           'na-10x14-envelope': Specifies the North American 10x14 inch envelope
5509
           'na-number-9-envelope': Specifies the North American number 9 business envelope
5510
           'na-6x9-envelope': Specifies the North American 6x9 inch envelope
5511
           'na-10x15-envelope': Specifies the North American 10x15 inch envelope
5512
5513
       The following standard values are defined for the less commonly used media (white-only):
5514
           'executive-white': Specifies the white executive medium
5515
           'folio-white': Specifies the folio white medium
5516
           invoice-white': Specifies the white invoice medium
5517
           'ledger-white': Specifies the white ledger medium
5518
           'quarto-white': Specified the white quarto medium
5519
           iso-a0-white': Specifies the ISO A0 white medium
5520
           iso-al-white': Specifies the ISO A1 white medium
5521
           iso-a2-white': Specifies the ISO A2 white medium
5522
           iso-a6-white: Specifies the ISO A6 white medium
5523
           iso-a7-white': Specifies the ISO A7 white medium
5524
           iso-a8-white: Specifies the ISO A8 white medium
5525
           iso-a9-white': Specifies the ISO A9 white medium
5526
           iso-10-white': Specifies the ISO A10 white medium
5527
           iso-b0-white: Specifies the ISO B0 white medium
5528
           iso-b1-white': Specifies the ISO B1 white medium
5529
           iso-b2-white': Specifies the ISO B2 white medium
5530
           iso-b3-white': Specifies the ISO B3 white medium
5531
           iso-b6-white': Specifies the ISO B6 white medium
5532
           iso-b7-white': Specifies the ISO B7 white medium
5533
           iso-b8-white': Specifies the ISO B8 white medium
5534
           iso-b9-white: Specifies the ISO B9 white medium
5535
           iso-b10-white': Specifies the ISO B10 white medium
5536
           jis-b0-white': Specifies the JIS B0 white medium
5537
           jis-b1-white': Specifies the JIS B1 white medium
5538
           jis-b2-white': Specifies the JIS B2 white medium
5539
           jis-b3-white': Specifies the JIS B3 white medium
5540
           jis-b6-white': Specifies the JIS B6 white medium
5541
           'jis-b7-white': Specifies the JIS B7 white medium
5542
           iis-b8-white: Specifies the JIS B8 white medium
5543
           iis-b9-white': Specifies the JIS B9 white medium
5544
           'jis-b10-white': Specifies the JIS B10 white medium
5545
5546
```

The following standard values are defined for engineering media (white only):

```
'a-white': Specifies the engineering A size medium
5548
           'b-white': Specifies the engineering B size medium
5549
           'c-white': Specifies the engineering C size medium
5550
           'd-white': Specifies the engineering D size medium
5551
           'e-white': Specifies the engineering E size medium
5552
5553
       The following standard values are defined for input-trays (from ISO DPA and the Printer MIB):
5554
           'top': The top input tray in the printer.
5555
           'middle': The middle input tray in the printer.
5556
           bottom': The bottom input tray in the printer.
5557
           'envelope': The envelope input tray in the printer.
5558
           'manual': The manual feed input tray in the printer.
5559
           'large-capacity': The large capacity input tray in the printer.
5560
           'main': The main input tray
5561
           'side': The side input tray
5562
5563
       The following standard values are defined for media sizes (from ISO DPA):
5564
           iso-a0: Specifies the ISO A0 size: 841 mm by 1189 mm as defined in ISO 216
5565
           "iso-a1": Specifies the ISO A1 size: 594 mm by 841 mm as defined in ISO 216
5566
           iso-a2': Specifies the ISO A2 size: 420 mm by 594 mm as defined in ISO 216
5567
           iso-a3': Specifies the ISO A3 size: 297 mm by 420 mm as defined in ISO 216
5568
           iso-a4': Specifies the ISO A4 size: 210 mm by 297 mm as defined in ISO 216
5569
           iso-a5': Specifies the ISO A5 size: 148 mm by 210 mm as defined in ISO 216
5570
           iso-a6': Specifies the ISO A6 size: 105 mm by 148 mm as defined in ISO 216
5571
           iso-a7': Specifies the ISO A7 size: 74 mm by 105 mm as defined in ISO 216
5572
           iso-a8': Specifies the ISO A8 size: 52 mm by 74 mm as defined in ISO 216
5573
           iso-a9': Specifies the ISO A9 size: 37 mm by 52 mm as defined in ISO 216
5574
           iso-a10': Specifies the ISO A10 size: 26 mm by 37 mm as defined in ISO 216
5575
           iso-bo': Specifies the ISO Bo size: 1000 mm by 1414 mm as defined in ISO 216
5576
           iso-b1': Specifies the ISO B1 size: 707 mm by 1000 mm as defined in ISO 216
5577
           iso-b2': Specifies the ISO B2 size: 500 mm by 707 mm as defined in ISO 216
5578
           iso-b3': Specifies the ISO B3 size: 353 mm by 500 mm as defined in ISO 216
5579
           iso-b4': Specifies the ISO B4 size: 250 mm by 353 mm as defined in ISO 216
5580
           iso-b5': Specifies the ISO B5 size: 176 mm by 250 mm as defined in ISO 216
5581
           iso-b6': Specifies the ISO B6 size: 125 mm by 176 mm as defined in ISO 216
5582
           iso-b7': Specifies the ISO B7 size: 88 mm by 125 mm as defined in ISO 216
5583
           iso-b8': Specifies the ISO B8 size: 62 mm by 88 mm as defined in ISO 216
5584
           iso-b9': Specifies the ISO B9 size: 44 mm by 62 mm as defined in ISO 216
5585
           iso-b10': Specifies the ISO B10 size: 31 mm by 44 mm as defined in ISO 216
5586
           'na-letter': Specifies the North American letter size: 8.5 inches by 11 inches
5587
           'na-legal': Specifies the North American legal size: 8.5 inches by 14 inches
5588
           'executive': Specifies the executive size (7.25 X 10.5 in)
5589
           'folio': Specifies the folio size (8.5 X 13 in)
5590
```

```
invoice': Specifies the invoice size (5.5 X 8.5 in)
5591
           'ledger': Specifies the ledger size (11 X 17 in)
5592
           'quarto': Specifies the quarto size (8.5 X 10.83 in)
5593
           iso-c3: Specifies the ISO C3 size: 324 mm by 458 mm as defined in ISO 269
5594
           iso-c4': Specifies the ISO C4 size: 229 mm by 324 mm as defined in ISO 269
5595
           "iso-c5": Specifies the ISO C5 size: 162 mm by 229 mm as defined in ISO 269
5596
           iso-c6': Specifies the ISO C6 size: 114 mm by 162 mm as defined in ISO 269
5597
           iso-designated-long': Specifies the ISO Designated Long size: 110 mm by 220 mm as defined in ISO
5598
              269
5599
           'na-10x13-envelope': Specifies the North American 10x13 size: 10 inches by 13 inches
5600
           'na-9x12-envelope': Specifies the North American 9x12 size: 9 inches by 12 inches
5601
           'na-number-10-envelope': Specifies the North American number 10 business envelope size: 4.125
5602
              inches by 9.5 inches
5603
           'na-7x9-envelope': Specifies the North American 7x9 inch envelope size
5604
           'na-9x11-envelope': Specifies the North American 9x11 inch envelope size
5605
           'na-10x14-envelope': Specifies the North American 10x14 inch envelope size
5606
           'na-number-9-envelope': Specifies the North American number 9 business envelope size
5607
           'na-6x9-envelope': Specifies the North American 6x9 envelope size
5608
           'na-10x15-envelope': Specifies the North American 10x15 envelope size
5609
           'monarch-envelope': Specifies the Monarch envelope size (3.87 x 7.5 in)
5610
           jis-b0': Specifies the JIS B0 size: 1030mm x 1456mm
5611
           'jis-b1': Specifies the JIS B1 size: 728mm x 1030mm
5612
           jis-b2': Specifies the JIS B2 size: 515mm x 728mm
5613
           jis-b3': Specifies the JIS B3 size: 364mm x 515mm
5614
           'jis-b4': Specifies the JIS B4 size: 257mm x 364mm
5615
           jis-b5': Specifies the JIS B5 size: 182mm x 257mm
5616
           'jis-b6': Specifies the JIS B6 size: 128mm x 182mm
5617
           jis-b7': Specifies the JIS B7 size: 91mm x 128mm
5618
           jis-b8': Specifies the JIS B8 size: 64mm x 91mm
5619
           jis-b9': Specifies the JIS B9 size: 45mm x 64mm
5620
           'jis-b10': Specifies the JIS B10 size: 32mm x 45mm
5621
       The following standard values are defined for engineering media sizes:
5622
           'a': Specifies the engineering A size: 8.5 inches x 11 inches
5623
           b': Specifies the engineering B size: 11 inches x 17 inches
5624
           'c': Specifies the engineering C size: 17 inches x 22 inches
5625
           'd': Specifies the engineering D size: 22 inches x 34 inches
5626
           'e': Specifies the engineering E size: 34 inches x 44 inches
5627
5628
```

#### 15. APPENDIX D: Processing IPP Attributes

5629

5630

5631

When submitting a print job to a Printer object, the IPP model allows a client to supply operation and Job Template attributes along with the document data. These Job Template attributes in the create request

affect the rendering, production and finishing of the documents in the job. Similar types of instructions may also be contained in the document to be printed, that is, embedded within the print data itself. In addition, the Printer has a set of attributes that describe what rendering and finishing options which are supported by that Printer. This model, which allows for flexibility and power, also introduces the potential that at job submission time, these client-supplied attributes may conflict with either:

- what the implementation is capable of realizing (i.e., what the Printer supports), as well as
- the instructions embedded within the print data itself.

The following sections describe how these two types of conflicts are handled in the IPP model.

#### 15.1 Fidelity

If there is a conflict between what the client requests and what a Printer object supports, the client may request one of two possible conflict handling mechanisms:

- 1) either reject the job since the job can not be processed exactly as specified, or
- 2) allow the Printer to make any changes necessary to proceed with processing the Job the best it can.

In the first case the client is indicating to the Printer object: "Print the job exactly as specified with no exceptions, and if that can't be done, don't even bother printing the job at all." In the second case, the client is indicating to the Printer object: "It is more important to make sure the job is printed rather than be processed exactly as specified; just make sure the job is printed even if client supplied attributes need to be changed or ignored."

The IPP model accounts for this situation by introducing an "ipp-attribute-fidelity" attribute.

In a create request, "ipp-attribute-fidelity" is a boolean operation attribute that is OPTIONALLY supplied by the client. The value 'true' indicates that total fidelity to client supplied Job Template attributes and values is required. The client is requesting that the Job be printed exactly as specified, and if that is not possible then the job MUST be rejected rather than processed incorrectly. The value 'false' indicates that a reasonable attempt to print the Job is acceptable. If a Printer does not support some of the client supplied Job Template attributes or values, the Printer MUST ignore them or substitute any supported value for unsupported values, respectively. The Printer may choose to substitute the default value associated with that attribute, or use some other supported value that is similar to the unsupported requested value. For example, if a client supplies a "media" value of 'na-letter', the Printer may choose to substitute 'iso-a4' rather than a default value of 'envelope'. If the client does not supply the "ipp-attribute-fidelity" attribute, the Printer assumes a value of 'false'.

Each Printer implementation MUST support both types of "fidelity" printing (that is whether the client supplies a value of 'true' or 'false'):

- If the client supplies 'false' or does not supply the attribute, the Printer object MUST always accept the request by ignoring unsupported Job Template attributes and by substituting unsupported values of supported Job Template attributes with supported values.

- If the client supplies 'true', the Printer object MUST reject the request if the client supplies unsupported Job Template attributes.

Since a client can always query a Printer to find out exactly what is and is not supported, "ipp-attribute-fidelity" set to 'false' is useful when:

- 1) The End-User uses a command line interface to request attributes that might not be supported.
- 2) In a GUI context, if the End User expects the job might be moved to another printer and prefers a sub-optimal result to nothing at all.
- 3) The End User just wants something reasonable in lieu of nothing at all.

## 15.2 Page Description Language (PDL) Override

If there is a conflict between the value of an IPP Job Template attribute and a corresponding instruction in the document data, the value of the IPP attribute SHOULD take precedence over the document instruction. Consider the case where a previously formatted file of document data is sent to an IPP Printer. In this case, if the client supplies any attributes at job submission time, the client desires that those attributes override the embedded instructions. Consider the case were a previously formatted document has embedded in it commands to load 'iso-a4' media. However, the document is passed to an end user that only has access to a printer with 'na-letter' media loaded. That end user most likely wants to submit that document to an IPP Printer with the "media" Job Template attribute set to 'na-letter'. The job submission attribute should take precedence over the embedded PDL instruction. However, until companies that supply document data interpreters allow a way for external IPP attributes to take precedence over embedded job production instructions, a Printer might not be able to support the semantics that IPP attributes override the embedded instructions.

The IPP model accounts for this situation by introducing a "pdl-override-supported" attribute that describes the Printer objects capabilities to override instructions embedded in the PDL data stream. The value of the "pdl-override-supported" attribute is configured by means outside the scope of this IPP/1.1 document.

This REQUIRED Printer attribute takes on the following values:

- 'attempted': This value indicates that the Printer object attempts to make the IPP attribute values take precedence over embedded instructions in the document data, however there is no guarantee.
- 'not-attempted': This value indicates that the Printer object makes no attempt to make the IPP attribute values take precedence over embedded instructions in the document data.

At job processing time, an implementation that supports the value of 'attempted' might do one of several different actions:

1) Generate an output device specific command sequence to realize the feature represented by the IPP

attribute value.

2) Parse the document data itself and replace the conflicting embedded instruction with a new

embedded instruction that matches the intent of the IPP attribute value.

- 3) Indicate to the Printer that external supplied attributes take precedence over embedded instructions and then pass the external IPP attribute values to the document data interpreter.
- 4) Anything else that allows for the semantics that IPP attributes override embedded document data instructions.

Since 'attempted' does not offer any type of guarantee, even though a given Printer object might not do a very "good" job of attempting to ensure that IPP attributes take a higher precedence over instructions embedded in the document data, it would still be a conforming implementation.

At job processing time, an implementation that supports the value of 'not-attempted' might do one of the following actions:

- 1) Simply pre-pend the document data with the PDL instruction that corresponds to the client-supplied PDL attribute, such that if the document data also has the same PDL instruction, it will override what the Printer object pre-pended. In other words, this implementation is using the same implementation semantics for the client-supplied IPP attributes as for the Printer object defaults.
- 2) Parse the document data and replace the conflicting embedded instruction with a new embedded instruction that approximates, but does not match, the semantic intent of the IPP attribute value.

Note: The "ipp-attribute-fidelity" attribute applies to the Printer's ability to either accept or reject other unsupported Job Template attributes. In other words, if "ipp-attribute-fidelity" is set to 'true', a Job is accepted if and only if the client supplied Job Template attributes and values are supported by the Printer. Whether these attributes actually affect the processing of the Job when the document data contains embedded instructions depends on the ability of the Printer to override the instructions embedded in the document data with the semantics of the IPP attributes. If the document data attributes can be overridden ("pdl-override-supported" set to 'attempted'), the Printer makes an attempt to use the IPP attributes when processing the Job. If the document data attributes can not be overridden ("pdl-override-supported" set to 'not-attempted'), the Printer makes no attempt to override the embedded document data instructions with the IPP attributes when processing the Job, and hence, the IPP attributes may fail to affect the Job processing and output when the corresponding instruction is embedded in the document data.

15.3 Using Job Template Attributes During Document Processing.

The Printer object uses some of the Job object's Job Template attributes during the processing of the document data associated with that job. These include, but are not limited to, "orientation-requested", "number-up", "sides", "media", and "copies". The processing of each document in a Job Object MUST follow the steps below. These steps are intended only to identify when and how attributes are to be used in processing document data and any alternative steps that accomplishes the same effect can be used to implement this specification document.

1. Using the client supplied "document-format" attribute or some form of document format detection algorithm (if the value of "document-format" is not specific enough), determine whether or not the document data has already been formatted for printing. If the document data has been formatted, then go to step 2. Otherwise, the document data MUST be formatted. The formatting detection algorithm is implementation defined and is not specified by this document. The formatting of the

document data uses the "orientation-requested" attribute to determine how the formatted print data should be placed on a print-stream page, see section 4.2.10 for the details.

2. The document data is in the form of a print-stream in a known media type. The "page-ranges" attribute is used to select, as specified in section 4.2.7, a sub-sequence of the pages in the print-stream that are to be processed and images.

3. The input to this step is a sequence of print-stream pages. This step is controlled by the "number-up" attribute. If the value of "number-up" is N, then during the processing of the print-stream pages, each N print-stream pages are positioned, as specified in section 4.2.9, to create a single impression. If a given document does not have N more print-stream pages, then the completion of the impression is controlled by the "multiple-document-handling" attribute as described in section 4.2.4; when the value of this attribute is 'single-document' or 'single-document-new-sheet', the print-stream pages of document data from subsequent documents is used to complete the impression.

The size(scaling), position(translation) and rotation of the print-stream pages on the impression is implementation defined. Note that during this process the print-stream pages may be rendered to a form suitable for placing on the impression; this rendering is controlled by the values of the "printer-resolution" and "print-quality" attributes as described in sections 4.2.12 and 4.2.13. In the case N=1, the impression is nearly the same as the print-stream page; the differences would only be in the size, position and rotation of the print-stream page and/or any decoration, such as a frame to the page, that is added by the implementation.

4. The collection of impressions is placed, in sequence, onto sides of the media sheets. This placement is controlled by the "sides" attribute and the orientation of the print-stream page, as described in section 4.2.8. The orientation of the print-stream pages affects the orientation of the impression; for example, if "number-up" equals 2, then, typically, two portrait print-stream pages become one landscape impression. Note that the placement of impressions onto media sheets is also controlled by the "multiple-document-handling" attribute as described in section 4.2.4.

5. The "copies" and "multiple-document-handling" attributes are used to determine how many copies of each media instance are created and in what order. See sections 4.2.5 and 4.2.4 for the details.

6. When the correct number of copies are created, the media instances are finished according to the values of the "finishings" attribute as described in 4.2.6. Note that sometimes finishing operations may require manual intervention to perform the finishing operations on the copies, especially uncollated copies. This document allows any or all of the processing steps to be performed automatically or manually at the discretion of the Printer object.

### 16. APPENDIX E: Generic Directory Schema

This section defines a generic schema for an entry in a directory service. A directory service is a means by which service users can locate service providers. In IPP environments, this means that IPP Printers can be registered (either automatically or with the help of an administrator) as entries of type printer in the

- directory using an implementation specific mechanism such as entry attributes, entry type fields, specific
- branches, etc. IPP clients can search or browse for entries of type printer. Clients use the directory service
- to find entries based on naming, organizational contexts, or filtered searches on attribute values of entries.
- For example, a client can find all printers in the "Local Department" context. Authentication and
- authorization are also often part of a directory service so that an administrator can place limits on end users
- so that they are only allowed to find entries to which they have certain access rights. IPP itself does not
- 5795 require any specific directory service protocol or provider.
- Note: Some directory implementations allow for the notion of "aliasing". That is, one directory entry object
- can appear as multiple directory entry object with different names for each object. In each case, each alias
- refers to the same directory entry object which refers to a single IPP Printer object.
- The generic schema is a subset of IPP Printer Job Template and Printer Description attributes (sections 4.2
- and 4.4). These attributes are identified as either RECOMMENDED or OPTIONAL for the directory entry
- itself. This conformance labeling is NOT the same conformance labeling applied to the attributes of IPP
- Printers objects. The conformance labeling in this Appendix is intended to apply to directory templates and
- to IPP Printer implementations that subscribe by adding one or more entries to a directory.
- RECOMMENDED attributes SHOULD be associated with each directory entry. OPTIONAL attributes
- 5805 MAY be associated with the directory entry (if known or supported). In addition, all directory entry
- attributes SHOULD reflect the current attribute values for the corresponding Printer object.
- The names of attributes in directory schema and entries SHOULD be the same as the IPP Printer attribute
- names as shown.
- In order to bridge between the directory service and the IPP Printer object, one of the RECOMMENDED
- directory entry attributes is the Printer object's "printer-uri-supported" attribute. The IPP client queries the
- "printer-uri-supported" attribute in the directory entry and then addresses the IPP Printer object using one of
- its URIs. The "uri-security-supported" attribute identifies the protocol (if any) used to secure a channel.
- The following attributes define the generic schema for directory entries of type PRINTER:

5814	printer-uri-supported	RECOMMENDED	Section 4.4.1
5815	uri-authentication-supported	RECOMMENDED	Section 4.4.2
5816	uri-security-supported	RECOMMENDED	Section 4.4.3
5817	printer-name	RECOMMENDED	Section 4.4.4
5818	printer-location	RECOMMENDED	Section 4.4.5
5819	printer-info	OPTIONAL	Section 4.4.6
5820	printer-more-info	OPTIONAL	Section 4.4.7
5821	printer-make-and-model	RECOMMENDED	Section 4.4.9
5822	ipp-versions-supported	RECOMMENDED	Section 4.4.14
5823	multiple-document-jobs-supported	OPTIONAL	Section 4.4.16
5824	charset-supported	OPTIONAL	Section 4.4.18
5825	generated-natural-language-		
5826	supported	OPTIONAL	Section 4.4.20
5827	document-format-supported	RECOMMENDED	Section 4.4.22
5828	color-supported	RECOMMENDED	Section 4.4.26
5829	compression-supported	RECOMMENDED	Section 4.4.32

deBry, Hastings, Herriot, Isaacson, Powell

5830	pages-per-minute	OPTIONAL	Section 4.4.36
5831	pages-per-minute-color	OPTIONAL	Section 4.4.37
5832			
5833	finishings-supported	OPTIONAL	Section 4.2.6
5834	number-up-supported	OPTIONAL	Section 4.2.7
5835	sides-supported	RECOMMENDED	Section 4.2.8
5836	media-supported	RECOMMENDED	Section 4.2.11
5837	printer-resolution-supported	OPTIONAL	Section 4.2.12
5838	print-quality-supported	OPTIONAL	Section 4.2.13

5850

5851

5852

5853

5854

5855

5856

5857

5858

5859

5860

5861

5862

5863

5864

5865

5866

5867

5868

5869

5870

5871

5872

5873

5874

5875

5876

5877

- 5840 17. APPENDIX F: Differences between the IPP/1.0 and IPP/1.1 "Model and Semantics" Documents
- This Appendix is divided into two lists that summarize the differences between IPP/1.1 (this document) and
- 5842 IPP/1.0 [RFC2566]. The section numbers refer to the numbers in this document which in some cases have
- changed from RFC 2566. When a change affects multiple sections, the item is listed once in the order of
- the first section affected and the remaining affected section numbers are indicated.
- The first list contains extensions and clarifications and the second list contains changes in semantics or
- conformance. However, client and IPP object implementations of IPP/1.0 MAY implement any of the
- extensions and clarifications in this document.
- The following extensions and clarifications have been incorporated into this document:
  - 1. Section 2.1 clarified that the term "client" can be either contained in software controlled by an end user or a part of a print server that controls devices. Issue 4
  - 2. Section 2 clarified that the term "IPP object" and "Printer object" can either be embedded in a device object or part of a print server that accepts IPP requests. Issue 4
  - 3. Section 2.4 added the description of the new "uri-authentication-supported" Printer Description attribute. Issue 2
  - 4. Section 3.1.3, 3.1.6, 3.2.5.2, and 3.2.6.2 clarified the error handling for operation attributes that have their own status code. Issues 18, 23, and 27
  - 5. Section 3.1.6 reorganized this section into sub-sections to separately describe "status-code", "status-message", "detailed-status-message", and "document-access-error" attributes. Issue 18
  - 6. Section 3.1.6.1 clarified the error status codes and their relationship to operation attributes. Issue
  - 7. Section 3.1.6.3 Added the OPTIONAL "detailed-status-message (text(MAX))" operation attribute to provide additional more detailed information about a response. Issue 35
  - 8. Section 3.1.6.4 and 3.2.2 Added the OPTIONAL "document-access-error (text(MAX))" operation attribute for use with Print-URI and Send-URI responses. Issue 35
  - 9. Sections 3.1.7 Added this new section to clarify returning Unsupported Attributes for all operations, including only returning attributes that were in the request. Moved the text from section 3.2.1.2 Unsupported Attributes to this section. Issues 18, 23, and 27
  - 10. Sections 3.1.7 and 4.1 clarified the encoding of the "out-of-band" 'unsupported' and 'unknown' values. Issues 12 and 15
  - 11. Section 3.1.8 clarified that only the version number parameter will be carried forward into future major or minor versions of the protocol.
  - 12. Section 3.1.8 relaxed the requirements to increment the major version number in future versions of the Model and Semantics document. Issue 33
  - 13. Section 3.1.9, and 3.2.5 added the 'processing' state to the list of job states that a job can be in after a Create-Job operation. Issue 13
  - 14. Section 3.1.9 clarified that a non-spooling Printer MAY accept zero or more subsequent jobs while processing a job and flow control them down. Subsequent create requests are rejected with the 'server-error-busy' error status. Issue 20

5883

5884

5885

5886

5887

5888

5889

5890

5891

5892

5893

5894

5895

5896

5897

5898

5899

5900

5901

5902

5903

5904

5905

5906

5907

5908

5909

5910

5911

5912

5913

5914

5915

5916

5917

5918

5919

5920

5921

- 15. Section 3.2.1.1 clarified the validation of the "compression" operation attribute and its relationship to the validation of the "document-format" attribute and returning Unsupported Attributes. Issues 6, Issue 11, and Issue 28
  - 16. Sections 3.2.1.1, 4.3.8, 13.1.4.16, and 13.1.4.17 added the 'client-error-compression-not-supported', 'client-error-compression-error' status codes and the 'unsupported-compression' and 'compression-error' job-state-reasons. Issue 28
  - 17. Sections 3.2.1.1 and 4.3.8 added 'unsupported-document-format' and 'document-format-error' jobstate-reasons. Issue 3
  - 18. Sections 3.2.2, 4.3.8 and 13.1.4.19 added 'client-error-document-access-error' status code and 'document-access-error' job state reason. Issue 35
  - 19. Section 3.2.5.2 and 3.2.6.2 clarified that the Unsupported Attributes group MUST NOT include attributes not requested in the Get-Printer-Attributes request. Issue 23
  - 20. Section 3.2.6 clarified that "limit" takes precedence over "which-jobs" and "my-jobs'. Issue 8
  - 21. Section 3.2.6.2 clarified that Get-Jobs returns 'successful-ok' when no jobs to return. Issue 24
  - 22. Sections 3.2.7, 3.2.8, and 3.2.9 added the OPTIONAL Pause-Printer, Resume-Printer, and Purge-Jobs operations
  - 23. Section 3.3.1 clarified that the authorization required for a Send-Document request MUST be the same user as the Create-Job or an operator. Issue 19
  - 24. Sections 3.3.5, 3.3.6, and 3.3.7 added the OPTIONAL Hold-Job, Release-Job, and Restart-Job operations.
  - 25. Section 4.1 clarified that the encoding of the out-of-band values are specified in the Encoding and Transport" document. Issue 12 and Issue 15
  - 26. Section 4.1.9.1 clarified that 'application/octet-stream' auto-sensing can happen at create request time and/or job/document processing time. Issue 9 and Issue 10
  - 27. Section 4.1.14 clarified that the localization of dateTime by the client includes the time zone. Issue 17
  - 28. Section 4.2 clarified that xxx-supported have multiple keywords and/or names by adding parentheses to the table to give: (1setOf (type3 keyword | name))
  - 29. Section 4.2.2 added the 'indefinite' keyword value to the "job-hold-until" attribute for use with the create operations and Hold-Job and Restart-Job operations.
  - 30. Section 4.2.6 added more enum values to the "finishings" Job Template attribute.
  - 31. Section 4.3.7 added that a forwarding server that cannot get any job state MAY return the job's state as 'completed', provided that it also return the new 'queued-in-device' job state reason. Issue 14
  - 32. Section 4.3.7.2 added the Partitioning of Job States section to clarify the concepts of Job Retention, Job History, and Job Removal.
  - 33. Section 4.3.8 added 'job-data-insufficient' job state reason to indicate whether sufficient data has arrived for the document to start to be processed. Issue 13
  - 34. Section 4.3.8 added 'document-access-error' job state reason to indicate an access error of any kind. Issue 35
  - 35. Section 4.3.8 added 'job-queued-for-marker' job state reason to indicate whether the job has completed some processing and is waiting for the marker. Issue 31
  - 36. Section 4.3.8 added 'unsupported-compression' and 'compression-error' job state reasons to indicate compression not supported or compression processing error after the create has been accepted. Issue 6

5927

5928

5929

5930

5931

5932

5933

5934

5935

5936

5937

5938

5939

5940

5941

5942

5943

5944

5945

5946

5947

5948

5949

5950

5951

5952

5953

5954

5955

5956

5957

5958

5959

5960

5961

5962

5963

5964

5965

- 5923 37. Section 4.3.8 added 'unsupported-document-format' and 'document-format-error' job state reasons 5924 to indicate document not supported or document format processing error after the create has been 5925 accepted. Issue 3
  - 38. Section 4.3.8 added 'queued-in-device' job state reason to indicate that a job as been forwarded to a print system or device that does not provide any job status. Issue 14
  - 39. Section 4.3.10 added "job-detailed-status-messages (1setOf text(MAX)) for returning detailed error messages. Issue 35
  - 40. Section 4.3.11 added the "job-document-access-errors (1setOf text(MAX)) Issue 35
  - 41. Section 4.3.14.2 clarified that the time recorded is the first time processing since the create operation or the Restart-Job operation. Issue 17
  - 42. Section 4.3.14.2 and 4.3.14.3 clarified that the out-of-band value 'no-value' is returned if the job has not started processing or has not completed, respectively. Issue 17
  - 43. Section 4.3.14 Added the OPTIONAL "date-time-at-creation", "date-time-at-processing", and "date-time-at-completed" Event Time Job Description attributes Issue 17
  - 44. Section 4.4.3 added the 'tls' value to "uri-security-supported" attribute.
  - 45. Section 4.4.3 clarified "uri-security-supported" is orthogonal to Client Authentication so that 'none' does not exclude Client Authentication. Issue 2
  - 46. Section 4.4.11 simplified the "printer-state" descriptions while generalizing to allow high end devices that interpret one or more jobs while marking another. Indicated that 'spool-area-full' and 'stopped-partly' "printer-state-reasons" may be used to provide further state information. Issue 31
  - 47. Section 4.4.12 added the 'moving-to-paused' keyword value to the "printer-state-reasons" attribute for use with the Pause-Job operation.
  - 48. Section 4.4.12 replaced the duplicate 'marker-supply-low' keyword with the missing 'toner-empty' keyword for the "printer-state-reasons" attribute. (This correction was also made before RFC 2566 was published).
  - 49. Section 4.4.12 clarified 'spool-area-full' "printer-state-reasons" to include non-spooling printers to indicate when it can and cannot accept another job. Issue 20
  - 50. Section 4.4.15 added the enum values to the "operations-supported" attribute for the new operations. Clarified that the values of this attribute are encoded as any enum, namely 32-bit values.
  - 51. Section 4.4.30 clarified that the dateTime value of "printer-current-time" is on a "best efforts basis". If a proper date-time cannot be obtained, the implementation returns the 'no-value' out-of-band value. Also clarified that the time zone NEED NOT be the time zone that the people near the device use and that the client SHOULD display the dateTime attributes in the user's local time.

    Issue 17
  - 52. Sections 4.4.36 and 4.4.37 added the OPTIONAL "pages-per-minute" and "pages-per-minute-color" Printer Description attributes.
  - 53. Section 5.1 clarified that the client conformance requirements apply to clients controlled by an end user and clients in servers. Issue 4
  - 54. Section 5.1 clarified that any response MAY contain additional attribute groups, attributes, attribute syntaxes, or attribute values. Issue 25 and Issue 26
  - 55. Section 5.1 clarified that a client SHOULD do its best to prevent a channel from being closed by a lower layer when the channel is flow controlled off by the IPP Printer. Issue 4 and Issue 5
  - 56. Section 5.2 clarified that the IPP object requirements apply to objects embedded in devices or that are parts of servers. Issue 4

5971

5972

5973

5974

5975

5976

5977

5978

5979

5980

5981 5982

5983

5984

5985

5986

5987

5988

5989

5990

5991

5992

5993

5994

5995

5996

5997

5998

5999

6000

6001

6002

6003

6004

6005

6006

6007

6008

6009

6010

- 57. Section 5.2.2 clarified that IPP objects MAY return operation responses that contain attribute groups, attribute names, attribute syntaxes, attribute values, and status codes that are extensions to this standard. Issue 26
  - 58. Section 8.3 clarified the use of URIs for each Client Authentication mechanism.
  - 59. Section 8.5 added the security discussion around the new operator/administrator operations.
    - 60. Section 13.1.4.16 added client-error-compression-not-supported (0x040F) Issue 6
    - 61. Section 13.1.4.17 added client-error-compression-error (0x0410) Issue 6
  - 62. Section 13.1.4.18 added client-error-document-format-error (0x0411) Issue 28
    - 63. Section 13.1.4.19 added client-error-document-access-error (0x0412) Issue 35
    - 64. Section 13.1.5.10 added server-error-multiple-document-jobs-not-supported (0x0509) Issue 34
    - 65. Section 14 added 'a-white', 'b-white', 'c-white', 'd-white', and 'e-white' and clarified that the existing 'a', 'b', 'c', 'd', and 'e' values are size values.
    - 66. Section 16 added the OPTIONAL "pages-per-minute" and "pages-per-minute-color" Printer attributes to the Directory schema.
    - 67. Section 16 added OPTIONAL "multiple-document-jobs-supported" to the Directory schema. Issue 34
    - 68. Section 16 added RECOMMENDED "uri-authentication-supported", "ipp-versions-supported", and "compression-supported" to the Directory schema. Issue 2, Issue 36, and Issue 28

The following changes in semantics and/or conformance have been incorporated into this document:

- 1. Section 3.1.8, 5.2.4, and 13.1.5.4 Clients and IPP objects MUST support version 1.1 conformance requirements and SHOULD support version 1.0 conformance requirements. Also clarified that IPP Printers MUST accept '1.1' requests and SHOULD accept '1.x' requests. Issue 33 and Issue 36
- 2. Section 3.2.1.1 and section 4.4.32 changed the "compression" operation and the "compression-supported" Printer Description attribute from OPTIONAL to REQUIRED. Issue 28
- 3. Sections 3.2.1.2 and 4.3.8 changed "job-state-reasons" from RECOMMENDED to REQUIRED, so that "job-state-reasons" MUST be returned in create operation responses. Issue 30
- 4. Sections 3.2.4, 3.3.1, 4.4.16, and 16 changed Create-Job/Send-Document so that they MAY be implemented while only supporting one document jobs. Added the "multiple-document-jobs-supported" boolean Printer Description attribute to indicate whether Create-Job/Send-Document support multiple document jobs or not. Added to the Directory schema. Issue 34
- 5. Section 4.1.9 deleted 'text/plain; charset=iso-10646-ucs-2', since binary is not legal with the 'text' type.
- 6. Section 4.2.4 indicated that the "multiple-document-handling" Job Template attribute MUST be supported with at least one value if the Printer supports multiple documents per job Issue 34
- 7. Section 4.3.7.2 indicated that the 'job-restartable' job state reason SHOULD be supported if the Restart-Job operation is supported. Issue 30
- 8. Section 4.3.8 changed "job-state-reasons" from RECOMMENDED to REQUIRED. Issue 30
- 9. Section 4.3.8 clarified the conformance of the values of the "job-state-reasons" attribute by copying conformance requirements from other sections of the document so that it is clear from reading the definition of "job-state-reasons" which values MUST or SHOULD be supported. The 'none', 'unsupported-compression', and 'unsupported-document-format' values MUST be supported. The "job-hold-until-specified' SHOULD be specified if the "job-hold-until" Job Template is supported. The following values SHOULD be supported: 'job-canceled-by-user', 'aborted-by-system', and 'job-completed-successfully'. The 'job-canceled-by-operator' SHOULD be supported if

- the implementation permits canceling by other than the job owner. The 'job-canceled-at-device' SHOULD be supported if the device supports canceling jobs at the console. The 'job-completed-with-warnings' SHOULD be supported, if the implementation detects warnings. The 'job-completed-with-errors' SHOULD be supported if the implementation detects errors. The 'job-restartable' SHOULD be supported if the Restart-Job operation is supported. Issue 30
- 10. Section 4.3.14 changed the "time-at-creation", "time-at-processing", and "time-at-completed" Event Time Job Description attributes from OPTIONAL to REQUIRED. Issue 17
- 11. Section 4.3.14.4 added the REQUIRED "job-printer-up-time (integer(1:MAX))" Job Description attribute as an alias for "printer-up-time" to reduce number of operations to get job times. Issue 17
- 12. Section 4.4.2 added the REQUIRED "uri-authentication-supported (1setOf type2 keyword)"
  Printer Description attribute to describe the Client Authentication used by each Printer URI. Issue 2
- 13. Section 4.4.12 changed "printer-state-reasons" Printer Description attribute from OPTIONAL to REQUIRED. Issue 30
- 14. Section 4.4.12 changed 'paused' value of "printer-state-reasons" to MUST if Pause-Printer operation is supported. Issue 30
- 15. Section 4.4.14 added the REQUIRED "ipp-versions-supported (1setOf keyword)" Printer Description attribute, since IPP/1.1 Printers do not have to support version '1.0' conformance requirements. Issue 36
- 16. Section 4.4.16 added the "multiple-document-jobs-supported (boolean)" Printer Description attribute so that a client can tell whether a Printer that supports Create-Job/Send-Document supports multiple document jobs or not. This attribute is REQUIRED if the Create-Job operation is supported. Issue 34
- 17. Section 4.4.24 changed the "queued-job-count" Printer Description attribute from RECOMMENDED to REQUIRED. Issue 29
- 18. Section 4.4.32 changed "compression-supported (1setOf type3 keyword)" Printer Description attribute from OPTIONAL to REQUIRED. Issue 28
- 19. Section 5.1 changed the client security requirements from RECOMMENDED non-standards track SSL3 to MUST support Client Authentication as defined in the IPP/1.1 Encoding and Transport document [IPP-PRO]. A client SHOULD support Operation Privacy and Server Authentication as defined in the IPP/1.1 Encoding and Transport document [IPP-PRO]. Issue 32
- 20. Section 5.2.7 changed the IPP object security requirements from OPTIONAL non-standards track SSL3 to SHOULD contain support for Client Authentication as defined in the IPP/1.1 Encoding and Transport document [IPP-PRO]. A Printer implementation MAY allow an administrator to configure the Printer so that all, some, or none of the users are authenticated. An IPP Printer implementation SHOULD contain support for Operation Privacy and Server Authentication as defined in the IPP/1.1 Encoding and Transport document [IPP-PRO]. A Printer implementation MAY allow an administrator to configure the degree of support for Operation Privacy and Server Authentication. Security MUST NOT be compromised when the client supplies a lower version-number in a request. Issue 32

See also the "IPP/1.1 Encoding and Transport" [IPP-PRO] document for differences between IPP/1.0 [RFC2565] and IPP/1.1 [IPP-PRO].

- 6052 18. Full Copyright Statement
- 6053 Copyright (C) The Internet Society (1999). All Rights Reserved.
- This document and translations of it may be copied and furnished to others, and derivative works that
- comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and
- distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and
- 6057 this paragraph are included on all such copies and derivative works. However, this document itself may not
- be modified in any way, such as by removing the copyright notice or references to the Internet Society or
- other Internet organizations, except as needed for the purpose of developing Internet standards in which
- case the procedures for copyrights defined in the Internet Standards process must be followed, or as
- required to translate it into languages other than English.
- The limited permissions granted above are perpetual and will not be revoked by the Internet Society or its
- successors or assigns.

- This document and the information contained herein is provided on an "AS IS" basis and THE INTERNET
- 6065 SOCIETY AND THE INTERNET ENGINEERING TASK FORCE DISCLAIMS ALL WARRANTIES,
- 6066 EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE
- OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED
- 6068 WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.